

ITEM:	PROJECT NAME:	DATE:
ITEM:	PROJECT NAME:	DATE:

CURVED GLASS RED MEAT MAXI CASE

FOR GENERAL REFERENCE ONLY Models shown may not match the model features or manuf year of the item offered by AERE.

MODEL	MCG-454-DM
	MCG-654-DM
	MCG-854-DM
	MCG-1054-DM



The Maxi Red Meat Case delivers full-size capacity with sleek curved-glass style to maximize performance. Cases available in lengths of 4', 6', 8' and 10'.

Designed for continuous line-ups.

STANDARD FEATURES


- Lift-up, pneumatic, cylinder-assisted, tempered thermopane curved front glass.
- Tempered end glass and rear doors.
- Stainless steel deck.
- Fold-down rear wrapping board.
- Coated evaporator coil(s).
- Adjustable temperature control.
- Accepts full-size deli risers and meat trays.
- Thermometer.
- Self-contained with condensate evaporator pan. Remote refrigeration available.


- Double-duty bottom refrigerated pull-out storage drawers. 4' has one drawer, 6' and 8' have two drawers, 10' has three drawers.
- Stainless steel exterior finish. Laminated finishes available.
- · Gravity coil.
- UL Safety and UL Sanitation Listed.
- Decorative end panels and front bumper rail available in white, black, gray and green.
- Designed for continuous case line-ups.
- Appliance receptacle provided on back.


CURVED GLASS RED MEAT MAXI CASE

OPTIONAL ACCESSORIES:

- ☐ Special Color Laminate Base
- ☐ Lighted Mezzanine Shelf
- ☐ Paper Roll Cutter/Holder
- ☐ Reflective Ends
- ☐ Reflective Doors
- ☐ Remote Refrigeration
- ☐ Scale Stand
- ☐ Slicer Stand
- ☐ Deli Step Pan Holder or Risers
- ☐ Promolux Lighting
- □ Cord & Plug (NEMA 5-20P)





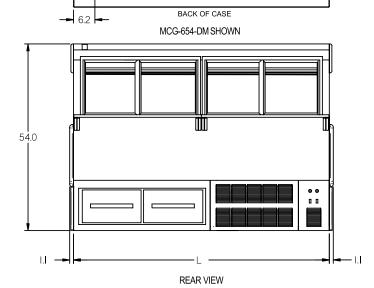

SPECIFICATIONS:

Model	Dimensions L W H	Shipping Weight (lbs)	Self-Contained 120/60/1	Remote 120/60/1
☐ MCG-454-DM	50" x 42.25" x 54"	730	3/4 HP • 15.4 AMPS	10.4 AMPS
☐ MCG-654-DM	74" x 42.25" x 54"	930	3/4 HP • 15.6 AMPS	10.6 AMPS
☐ MCG-854-DM	98" x 42.25" x 54"	1,230	3/4 HP • 15.8 AMPS	10.8 AMPS
☐ MCG-1054-DM	122" x 42.25" x 54"	1,530	3/4 HP • 16.0 AMPS	11.0 AMPS

- Includes general purpose receptacle 115V, 3AMP.
- Refrigerated cases are designed to operate in a maximum of 75°F ambient and 55% relative humidity.
- Due to continuing engineering improvements, specifications are subject to change without notice.







FEDERAL INDUSTRIES

A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206 EMAIL: geninfo@federalind.com FAX: 608-424-3234 WEBSITE: www.federalind.com

