



### GO2 LITE – BINA

#### Overview

Go2 Lite is designed for both aesthetics and functionality. It installs and removes without damaging ceilings, ensuring a clean, hassle-free experience.

#### Design & Options

Available in square and round shapes, with bezel or bezel-less versions, Go2 Lite integrates seamlessly into modern interiors.

#### Performance

Power range: 6–20W. Deep anti-glare optics provide comfortable primary and ambient lighting for high-end indoor spaces.

#### Key Features



Damage-free installation and removal



Square and round shapes



Bezel and bezel-less options for seamless ceiling integration



Power range: 6–20W




Deep anti-glare optics for comfortable lighting



Sleek, modern, high-end design

### SPECIFICATIONS

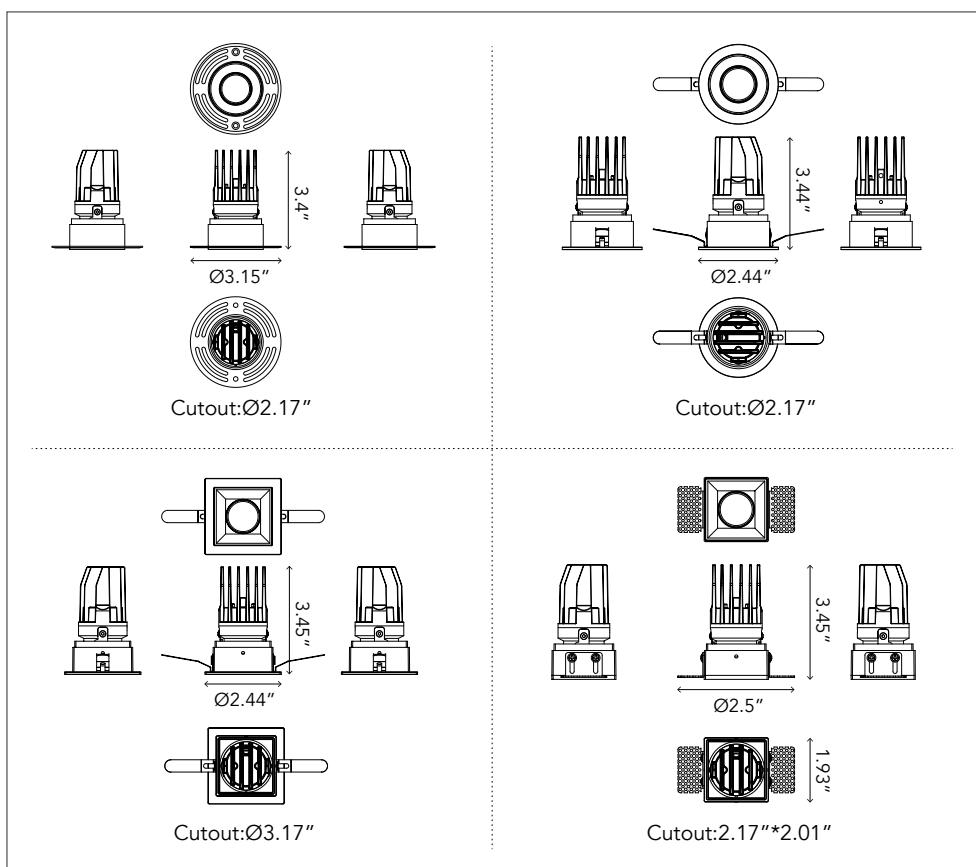

<b>Input Voltage</b>	100-277V
<b>Wattage</b>	6W
<b>Delivered Lumens</b>	390lm
<b>CRI</b>	>90Ra
<b>LED</b>	SDCM=1x3 MacAdam Ellipse
<b>Adjustability</b>	Max Tilt Angle 30° / Horizontal Rotation Angle 356°
<b>Dimming</b>	Trial/0-10v(100%-5%)
<b>Lamp Life</b>	50,000Hr
<b>Environment</b>	IP20/IP44
<b>Heat Sink</b>	Aluminum body with oxidized powder coating
<b>Trim</b>	Die-cast Aluminum
<b>Operating Temp</b>	-4°F-104°F



### Order Code


ORDER CODE EXAMPLE: GO2LT-2"-ST-F-SH-6W-40K-40D-WH-C-D10-NC

SERIES	SIZE	TRIM	WATTAGE	CCT	BEAM ANGLE	
GO2LT	2"	<b>RT</b> Round Trimmed <b>RL</b> Round Trimless <b>ST</b> Square Trimmed <b>SL</b> Square Trimless	<b>F</b> Fixed <b>A</b> Adjustable <b>SH</b> Shower Trim <small>*Non-conductive trim for shower</small>	<b>6W</b> 390lm	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K <b>TW</b> Tunable White 2700K-6500K <b>WD</b> Warm Dim 3000K-1800K	<b>15D</b> 15 Degree <b>20D</b> 20 Degree <b>30D</b> 30 Degree <b>40D</b> 40 Degree <b>50D</b> 50 Degree <b>60D</b> 60 Degree

FINISH	OPTICAL ACCESSORIES	DIMMING	INSTALATION TYPE	EMERGENCY BACKUP	
Reflector <b>WH</b> white <b>BK</b> Black	Trim <b>W</b> White <b>B</b> Black <b>C</b> Chrome <b>RAL#</b> Custom	Solite Lens (included) <b>HL</b> Honeycomb Louver <b>LS</b> Linear Spread Lens	<b>ELV</b> ELV/TRIAC Phase Cutting 3% <b>D10</b> 0/1-10V(100%-1%)	<b>NC</b> New Construction Tray <b>RM</b> Remodel (no NC Tray) <b>IC</b> IC Rated	<b>EM10</b> 10 watts / 90 mins

### MOUNTING OPTIONS


#### NC - New Construction Frame-In Tray

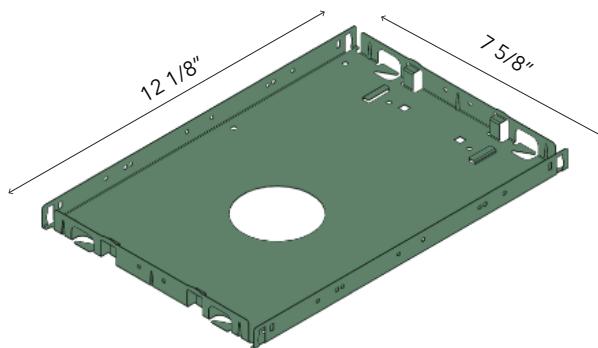

#### Standard bar hanger (included)

Mounting Length 14 3/4" - 26".


Extension kit can be ordered separately.

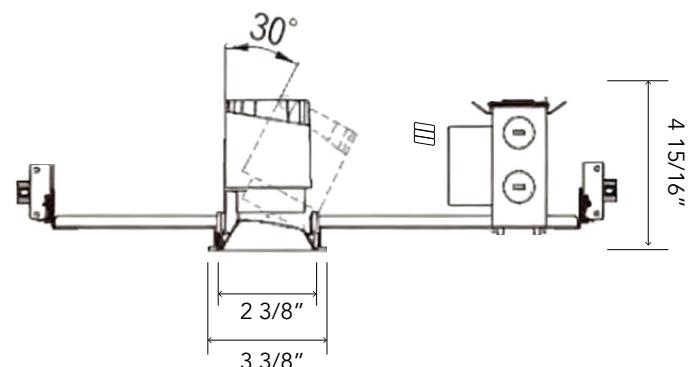



Ceiling Cut-out Ø2-7/8"(Ø72mm)

Mounting Frame 12-1/8"(307.3mm) X 7-5/8"(193.8mm)

#### IC - insulated Ceiling Box

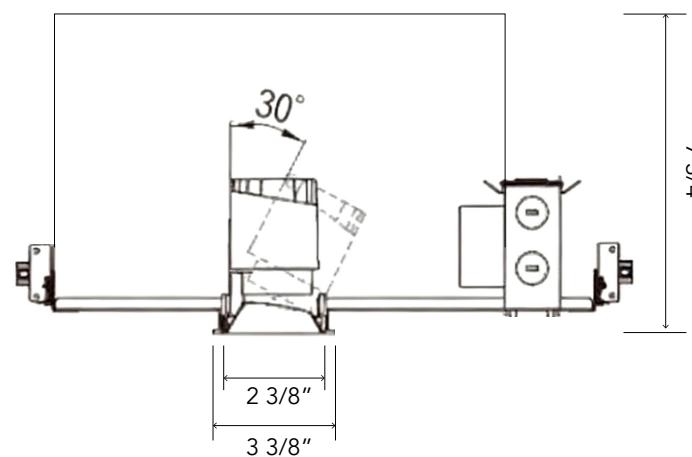

#### RM - Remodel without Frame-In Tray

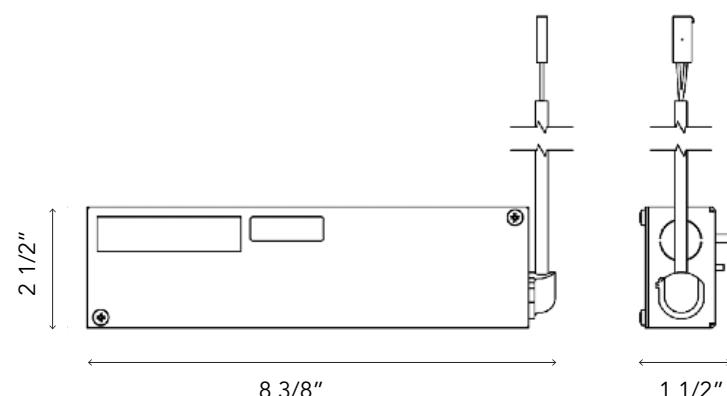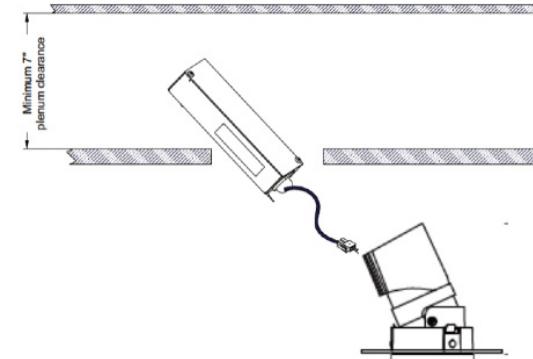


### EMERGENCY

#### PRIMARY SPECIFICATIONS

Output Power Max	Input Power	Input Current Max	Emergency Operating Time	Battery	Input Voltage	Output Voltage	Ambient Operating Temperature	UL Listed for Us and Canada
10W	4W	60 mA	90 min.	LiFePO <sub>4</sub> 24 Hour recharge 7 to 10 year Life expectancy	120-277 Vac 50/60Hz	12-55 V <sup>1</sup>	0 °C through 55 °C	UL and cUL (UL924) Emergency LED Driver

#### Dimensions / Weight

Length	9.5"	Height	1.2"
Width	1.7"	Mounting Length	8.9"
Weight	2.09 lb		

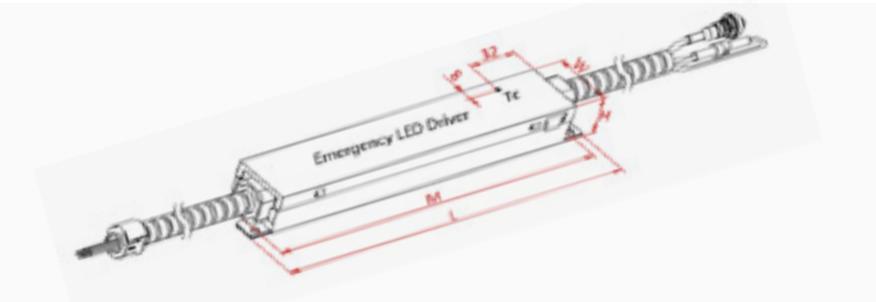

#### REMOTE TEST SWITCH


The remote test switch may be mounted adjacent to the LED fixture by others.

#### EMERGENCY BATTERY ACCESS

Above ceiling access is recommended for ease of service, but LED fixture sizes of 4" and larger are capable of below ceiling access. IC/ICAT/CP box and iTS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the emergency battery.

#### REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all local and national electric/building codes.

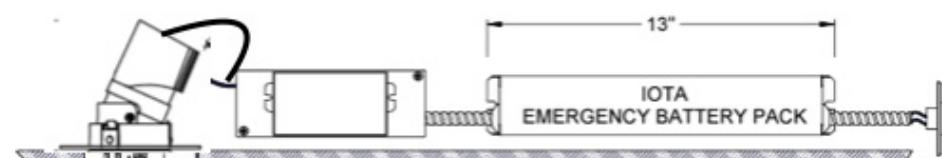

#### WALL PLATE ACCESSORIES

