

XBA-USD6 Option Switch Settings


Supported bill USD 1, 5, 10, 20, 50, 100 6bills.

FUNCTION	SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
★ Reject USD 1	ON							
★ Accept USD 1	OFF							
★ Reject USD 5		ON						
★ Accept USD 5		OFF						
★ Reject USD 10			ON					
★ Accept USD 10			OFF					
★ Reject USD 20				ON				
★ Accept USD 20				OFF				
★ Reject USD 50 & 100					ON			
★ Accept USD 50 & 100					OFF			
★ Disable Bill Reject 4 Times BA Stop By 30 Sec						ON		
★ Enable Bill Reject 4 Times BA Stop By 30 Sec						OFF		
★ Stack Banknote when Power-up							ON	
★ Reject Banknote when Power-up							OFF	
★ Reserved								ON
★ Reserved								OFF

This dip switch is located at the side of XBA.

Currency Assign Data

Interface Bill value	Pulse	NISR
BV1	\$ 1	\$ 1
BV2	\$ 5	\$ 1
BV3	\$ 10	\$ 5
BV4	\$ 20	\$ 10
BV5	\$ 50	\$ 20
BV6	\$100	\$ 50
BV7		\$100

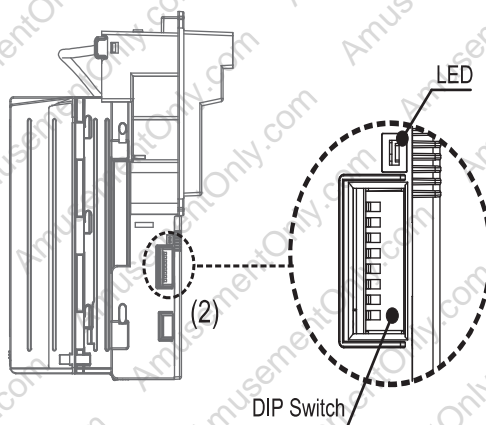


Appendix

XBA-USD6(Pulse/NISR)

FUNCTION		SW1	SW2	SW3	SW4	SW5	SW6	SW7	SW8
Pulse	NISR								
Inhibit Active HIGH	No ERROR CODE	ON							
★ Inhibit Active LOW	Send ERROR CODE	OFF							
★ Harness Disable			ON						
★ Harness Enable			OFF						
★ 50ms LO / 50ms HI				OFF	OFF				
60ms LO / 300ms HI				OFF	ON				
30ms LO / 50ms HI				ON	OFF				
150ms LO / 150ms HI				ON	ON				
Reserved	Standard Mode				ON				
★ Reserved	Customized Mode				OFF				
★ Credit-Pulse Normal HIGH						ON			
★ Credit-Pulse Normal LOW						OFF			
★ Pulse Mode							ON		
★ NISR Mode							OFF		
★ 1 pulse / USD 1								OFF	OFF
2 pulses / USD 1								OFF	ON
4 pulses / USD 1								ON	OFF
20 pulses / USD 1								ON	ON

★ Manufacture setting

This dip switch is located on the CPU board, remove the CPU board cover first.

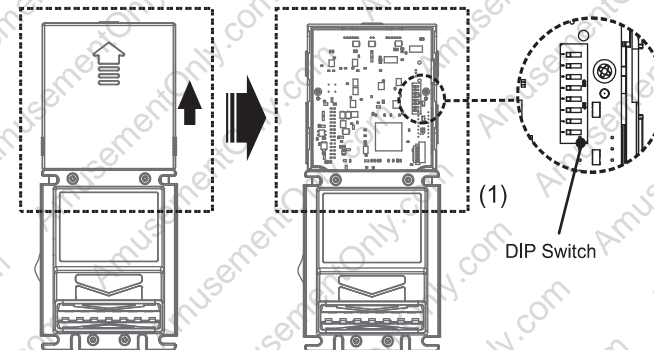

*After setting dip switch of the credit pulses, you should reset the bill acceptor again.
Note:1.Turn this dip to with restart the bill acceptor will restore
2.Calibration card is needed.