

INSTALLATION INSTRUCTIONS

*Mounts to standard 4" junction box (round or square) using supplied adapter plate. Please confirm junction box type with Bina before ordering.

STEP 1 ▶

Loosen the M4 screws and remove the lamp support.
Drill four mounting holes and one wiring hole in the wall, aligning them precisely with the holes on the support. Insert a rubber plug or wooden block firmly into each hole.

STEP 2 ▶

Pull out the power cord from the wall, guide it through the wiring hole, and secure the support to the wall using wood screws.


STEP 3 ▶

Connect the power cord to the lamp's power cable, then wrap the connection securely with waterproof tape. Ensure proper waterproof protection is applied.

STEP 4 ▶

Position the long cable neatly in place, then place the lamp into the support and secure it with the M4 MI screws.

CONNECTION DIAGRAM

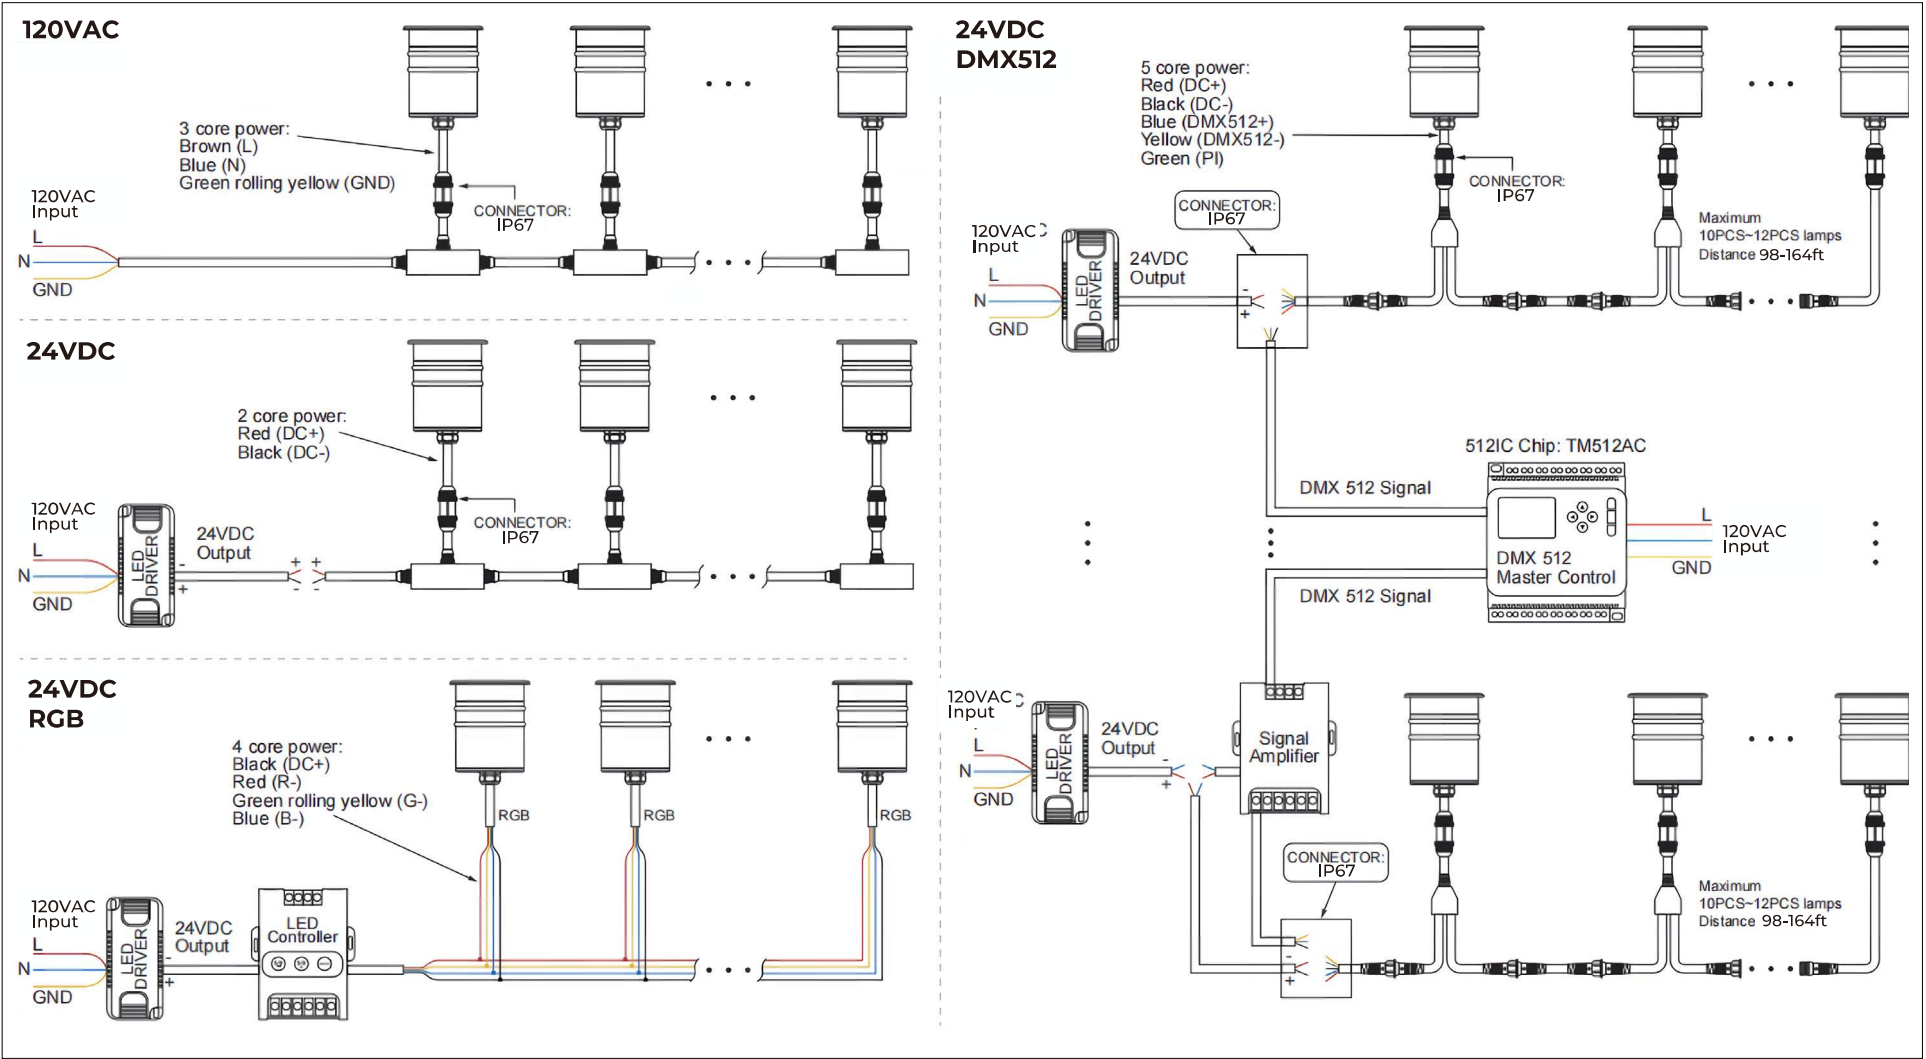

SAFETY INSTRUCTIONS BEFORE INSTALLATION

- Installation must be carried out by a qualified technician or authorized professional.
- Always disconnect power before installation to prevent the risk of electric shock.
- Ensure adequate ventilation space around the LED heat sink to allow proper cooling.
- Only connect LED luminaires using the recommended drivers.
- The actual product may vary slightly from the illustrations shown.
- Do not attempt to disassemble the product.
- Any damage caused by modifications or improper installation will void the warranty.



In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

✉ info@binacompany.com
☎ 305.735.3114
🌐 www.binacompany.com

