


Project:

Type:

Qty:

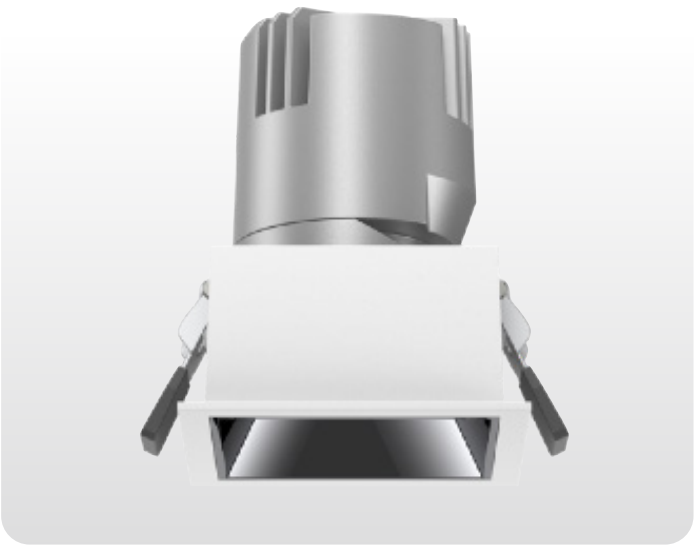

FEATURES



Modular design, field replaceable LED module, trim, beam lens, and accessories



Interchangeable secondary reflector options for glare control and maximum visual comfort.



Quiet ceiling achieved through deep regress.




Precise light control, 10°/15°/24°/38°/55° TIR lens beam options.



Offered standard with flicker free dimming to 1% and fade-to-off dimming (.1%), option available.

SPECIFICATIONS

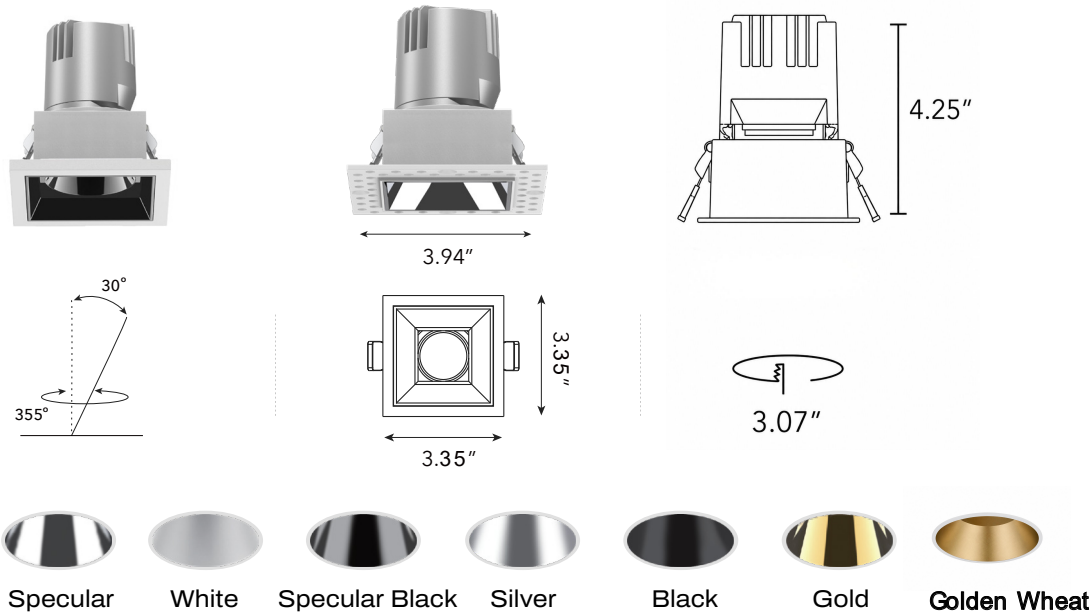

Input Voltage	100-277V AC
Wattage	15W
Delivered Lumens	1275Lm-1575Lm +/-5%
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K, 30K, 35K, 40K, D2W, TW
CRI	>90Ra
Beam Angle	TIR Lens 10°/15°/24°/36°/55°
Adjustability	Max Tilt Angle 30° / Horizontal Rotation Angle 355°
Dimming	Trimode Dimming /Triac / 0-10V (100%-1%)
Lamp Life	50,000Hr
Environment	IP20 & IP44
Operating Temp	-4° F - 104° F

Order Code

ORDER CODE EXAMPLE: GO2LX-3"-ST-F-LO-30K-24D-SB-W-SO-D10-NC

SERIES	SIZE	TRIM		WATTAGE	CCT	BEAM ANGLE	FINISH	
Go2LX	3" Square Downlight	ST	Square Trimmed	F	LO	27K	10D	Reflector
		SL	Square Trimless					---
				A	HO	30K	15D	Leave blank for wall wash, pinhole trim options.
								SP
						35K	24D	Specular
						40K	38D	White
							55D	Specular Black
						TW		SB
						WD		SL
								BK
								GD
								CW
								W
								B
								C

OPTICAL ACCESSORIES	ENVIRONMENT	DIMMING	INSTALLATION TYPE	ADDITIONAL OPTIONS
SF Softening Lens HL Honeycomb Louver SO Solite Lens LS Linear Spread Lens	— Leave blank if "dry or damp location (IP44)"	ELV ELV/TRIAC Phase Cutting 3% D10 0/1-10V(100%-1%) DAL DALI-2 Dim to off 0.1%	NC New Construction RM Remodel AT/CP Airtight WC Wood Ceiling IC Insulation Contact	EM10 10 watts / 90 mins 2SD 2-sectioned driver box LG Standard large driver box

Project:

Type:

Qty:

WOOD CEILING ADAPTER



*For wood ceilings over 1" thick, specify ceiling thickness for proper spring clip selection. Ceilings over 2" require an extended collar.

PERFORMANCE

90CRI/15W	2700K	3000K	3500K	4000K
15Degree	1473	1551	1628	1710
24Degree	1498	1577	1656	1738
38Degree	1528	1609	1689	1774
55Degree	1547	1628	1709	1795

Preliminary, pre-launch test-data. Delivered lumen values +/- 5%. Optical filters will reduce delivered lumen values

OPTICAL LENS



Soft Focus



Honeycomb



Linear Spread



Solite

LIGHT LOSS FACTOR	
Honeycomb Louver	0.55
Solile Filter	0.70
Frosted Filter	0.70
Linear Spread Filter	0.70



Project:

Type:


Qty:

MOUNTING OPTIONS

NC - New Construction Frame-In Tray

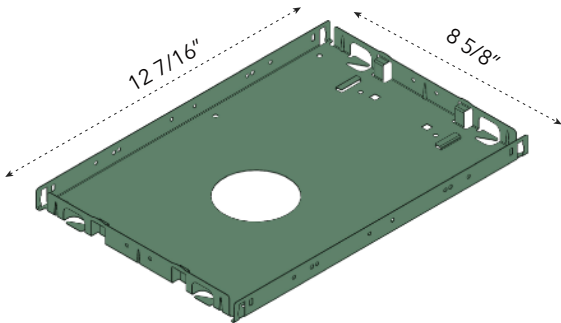


Standard bar hanger (included)
Mounting Length 14 3/4" - 26".
Extension kit can be ordered separately.



Commercial bar hanger #1487
Butterfly and Caterpillar brackets available




New Construction & Remodel Mounting

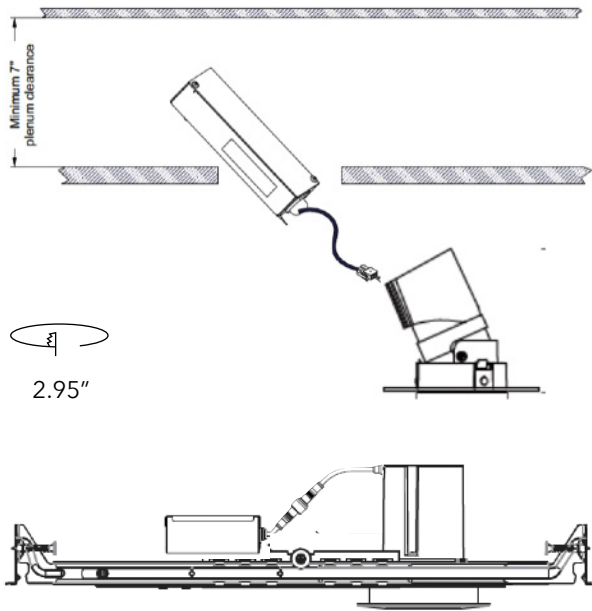


LED Driver Enclosure and Junction Box


Standard Size

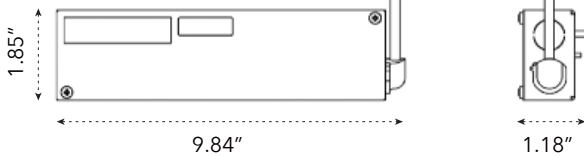


Large Size

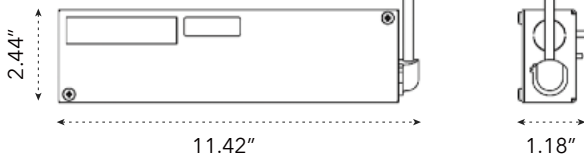

Chicago Plenum / Airtight

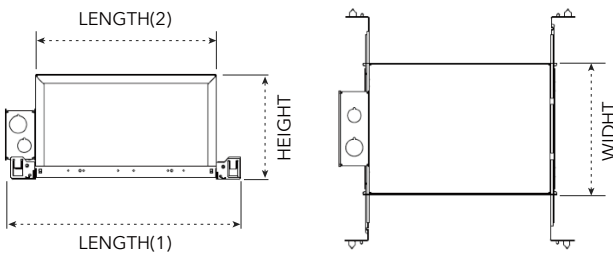

Length	Width	Height
11 3/4"	8 1/2"	6 3/4"

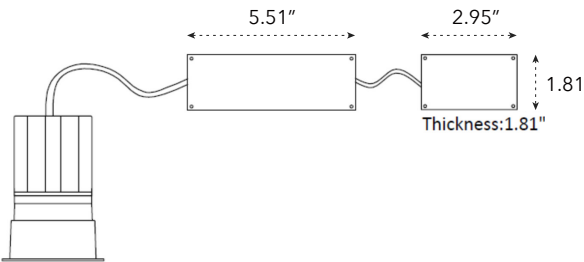

2-sectional driver and wiring box will ship when the AT/CP option is selected. Also can be used for plenum space issues.

Project:	Type:	Qty:
----------	-------	------


EMERGENCY

PRIMARY SPECIFICATIONS

Output Power Max	Input Power	Input Current Max	Emergency Operating Time	Battery	Input Voltage	Output Voltage	Ambient Operating Temperature	UL Listedfor Us and Canada
10W	4W	100 mA	90 min.	Li-ion 18650 7.4V 2500mAh	120-277 Vac 50/60Hz	12-55 VDC	0 °C through 55 °C	ULand cUL (UL924) Emergency LED Driver

Dimensions / Weight

Length	12.4"	Height	1.21"
Width	1.77"	Mounting Length	11.8"
Weight	2.47 lb		

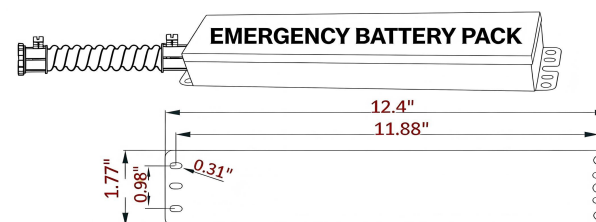

REMOTE TEST SWITCH


The remote test switch may be mounted adjacent to the LED fixture by others.

EMERGENCY BATTERY ACCESS


Above ceiling access is recommended for ease of service, but LED fixture sizes of 4" and larger are capable of below ceiling access. IC/ICAT/CP box and iTS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the emergency battery.

REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all local and national electric/building codes.

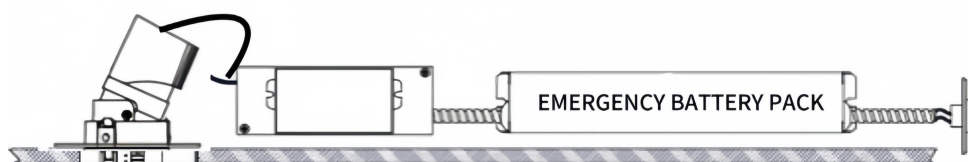

WALL PLATE ACCESSORIES



TEST SWITCH

