


Project:

Type:

Qty:

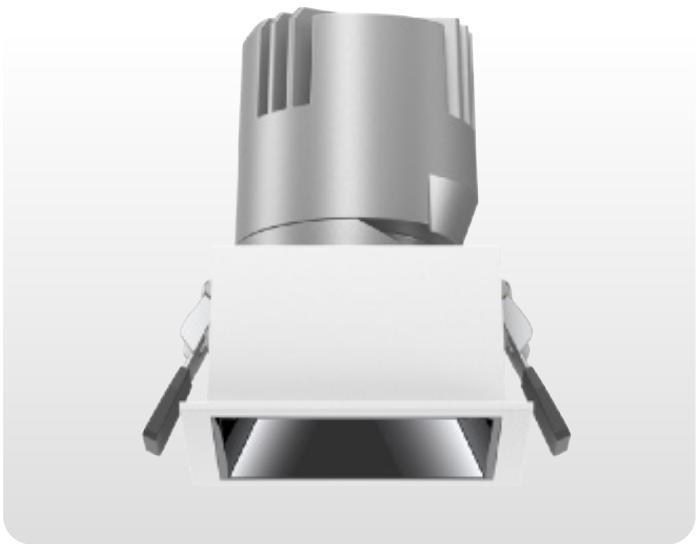

FEATURES



Modular design, field replaceable LED module, trim, beam lens, and accessories



Interchangeable secondary reflector options for glare control and maximum visual comfort.



Quiet ceiling achieved through deep regress.




Precise light control, 10°/ 15°/ 24°/ 38°/ 55° TIR lens beam options.



Offered standard with flicker free dimming to 1% and fade-to-off dimming (.1%), option available.

SPECIFICATIONS

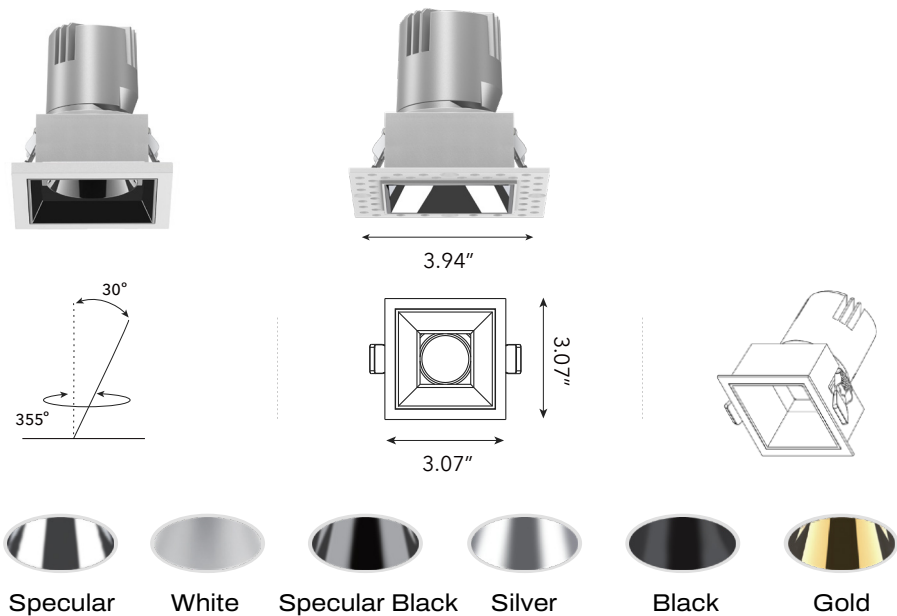

Input Voltage	100-277V AC
Wattage	15W
Delivered Lumens	1275Lm-1575Lm +/-5%
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K, 30K, 35K, 40K, D2W, TW
CRI	>90Ra
Beam Angle	TIR Lens 10°/ 15°/ 24°/ 36°/ 55°
Adjustability	Max Tilt Angle 30° / Horizontal Rotation Angle 355°
Dimming	Trimode Dimming / Triac / 0-10V (100%-1%)
Lamp Life	50,000Hr
Environment	IP20 & IP44
Operating Temp	-4° F - 104° F

Order Code

ORDER CODE EXAMPLE: Go2LX-3"Square Downlight-3STF-LO-30K-24D-SBW-SO-D10-NC

SERIES	SIZE	TRIM		WATTAGE	CCT	BEAM ANGLE	FINISH		
Go2LX	3" Square Downlight	3ST Square Trimmed 3SL Square Trimless	F Fixed A Adjustable W Wall Wash P Pinhole S Slot	LO Low output (15W@85LM/W) HO High output (15W@ 105LM/W)	27K 2700K	10D 10° 15D 15° 24D 24° 38D 38° 55D 55°	Reflector		Trim
					30K 3000K		---	Leave Blank for wal viash piehole or sbt Trim Options	
					35K 3500K		SP	Specular	
					40K 4000K		WH	White	
							SB	Specular Black	
						TW Tunable White 2700K-6500K	SL	Silver	
						WD Warm Dim 3000K-1800K	BK	Black	
							GD	Gold	
							CS	Custom	

OPTICAL ACCESSORIES	ENVIRONMENT	DIMMING	INSTALATION TYPE	EMERGENCY BACKUP
SF Softening Lens HL Honeycomb Louver SO Solite Lens LS Linear Spread Lens	Leave blank if "dry o damp location (IP44)" WET for exterior wet locations (under covered ceiling only)	ELV ELV/TRIAC Phase Cutting 3% D10 0/1-10V(100%-1%) FOI 0/1-10V(100%-1%) DAL DALI-2 Dim to off 0.1%  DAL Larger size driver enclosure box Specify after dimming protocol. Example (ELV-LG)	NC New Construction IC Insulation Contact AT/CP Airtight RM Remodel	EM5 5 watts / 90 mins EM10 10 watts / 90 mins

Project:

Type:

Qty:

PERFORMANCE

90CRI/15W	2700K	3000K	3500K	4000K
15Degree	1473	1551	1628	1710
24Degree	1498	1577	1656	1738
38Degree	1528	1609	1689	1774
55Degree	1547	1628	1709	1795

Preliminary, pre-launch test-data. Delivered lumen values +/- 5%. Optical filters will reduce delivered lumen values

OPTICAL LENS



Soft Focus



Honeycomb



Linear Spread



Solite

LIGHT LOSS FACTOR

Honeycomb Louver	0.55
Solite Filter	0.70
Frosted Filter	0.70
Linear Spread Filter	0.70



Project:

Type:


Qty:

MOUNTING OPTIONS

NC - New Construction Frame-In Tray

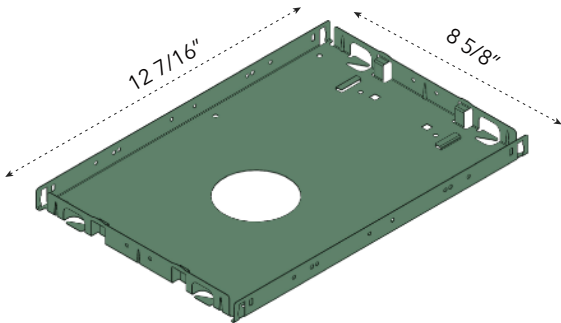


**Standard bar hanger (included)**  
Mounting Length 14 3/4" - 26".  
Extension kit can be ordered separately.




**Commercial bar hanger #1487**  
Butterfly and Caterpillar brackets available




New Construction & Remodel Mounting

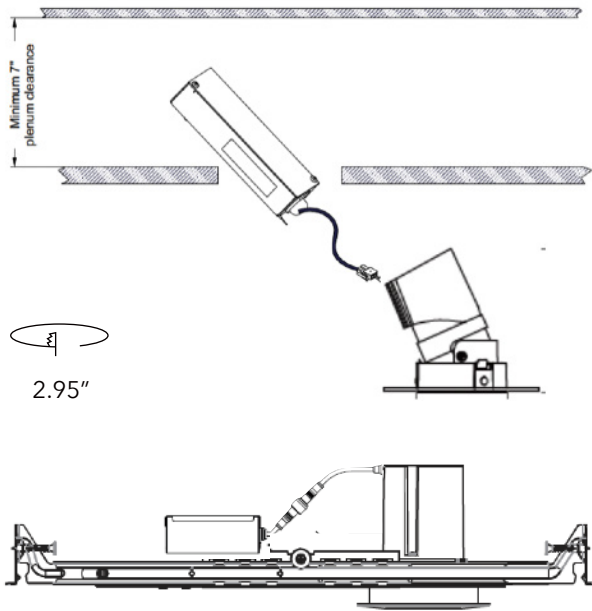


LED Driver Enclosure and Junction Box

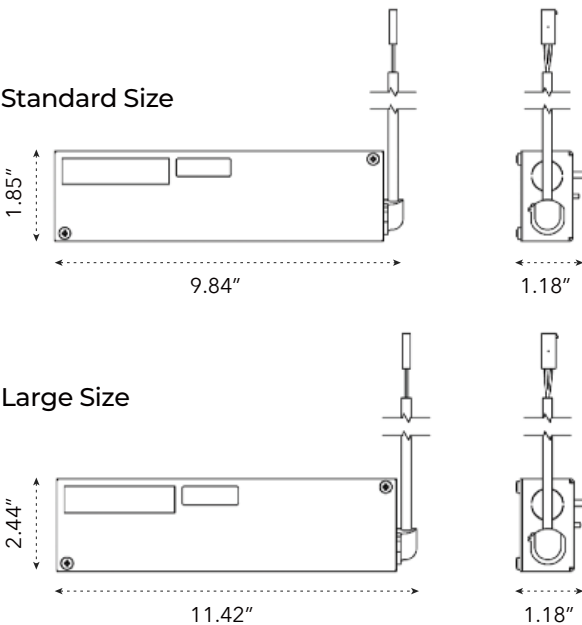

Chicago Plenum / Airtight

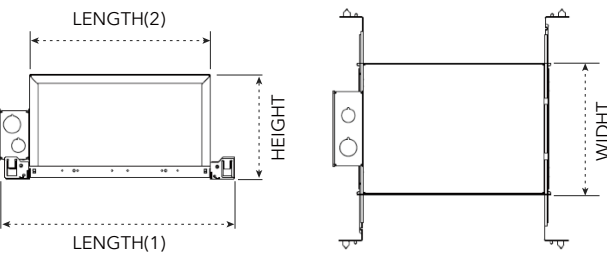

Length	Width	Height
11 3/4"	8 1/2"	6 3/4"

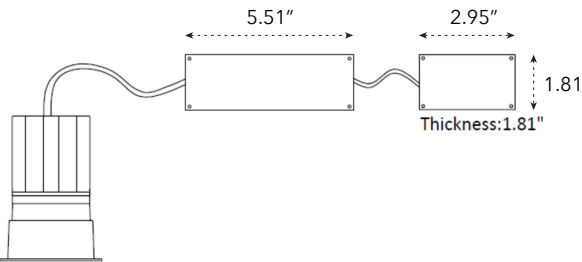

2-sectional driver and wiring box will ship when the AT / CP option is selected. Also can be used for plenum space issues.

Project:	Type:	Qty:
----------	-------	------


**EMERGENCY**

## PRIMARY SPECIFICATIONS

Output Power Max	Input Power	Input Current Max	Emergency Operating Time	Battery	Input Voltage	Output Voltage	Ambient Operating Temperature	UL Listedfor Us and Canada
10W	4W	60 mA	90 min.	LiFePO <sub>4</sub> 24 Hour recharge 7 to 10 year Life expectancy	120-277 Vac 50 / 60Hz	12-55 V <sup>1</sup>	0 °C through 55 °C	ULand cUL (UL924) Emergency LED Driver

### Dimensions / Weight

Length	9.5"	Height	1.2"
Width	1.7"	Mounting Length	8.9"
Weight	2.09 lb		

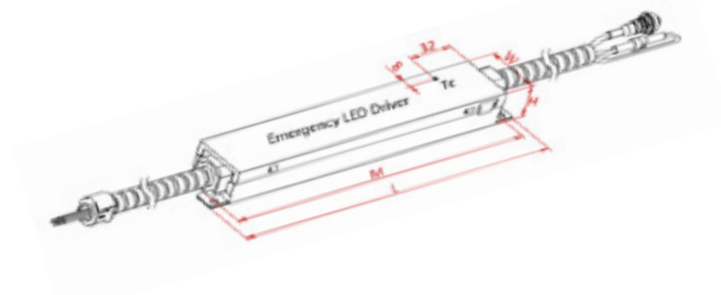

## REMOTE TEST SWITCH


The remote test switch may be mounted adjacent to the LED fixture by others.

## EMERGENCY BATTERY ACCESS

Above ceiling access is recommended for ease of service, but LED fixture sizes of 4" and larger are capable of below ceiling access. IC / ICAT / CP box and ITS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the emergency battery.

## REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all local and national electric / building codes.

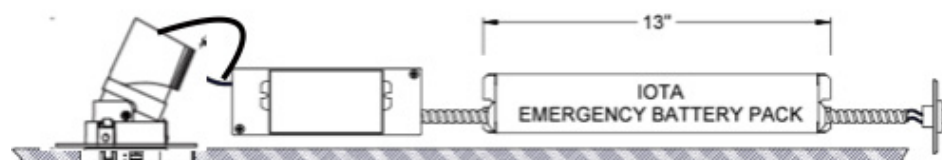

## WALL PLATE ACCESSORIES

