

TOTAL HEAD

M PSI FT

V-BELT GUIDELINES - 2000 RPM AND HIGHER			
SPEED - RPM	2000	2200	2400
MIN PUMP SHEAVE (IN)	6.00	7.00	9.00
MIN PUMP SHEAVE (MM)	152	178	229

PERFORMANCE CURVE

VOLUTE 38218-304 CURVE 6504E-B-1


IMPELLER 38621-786 MODEL 6504E-B

SIZE 6"X4" IMP.DIA. 14.25"

SP.GR. 1.0 RPM NOTED

250 MAX. OPERATING PRESSURE
SPECIFY PLUMBING ACCORDINGLY

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

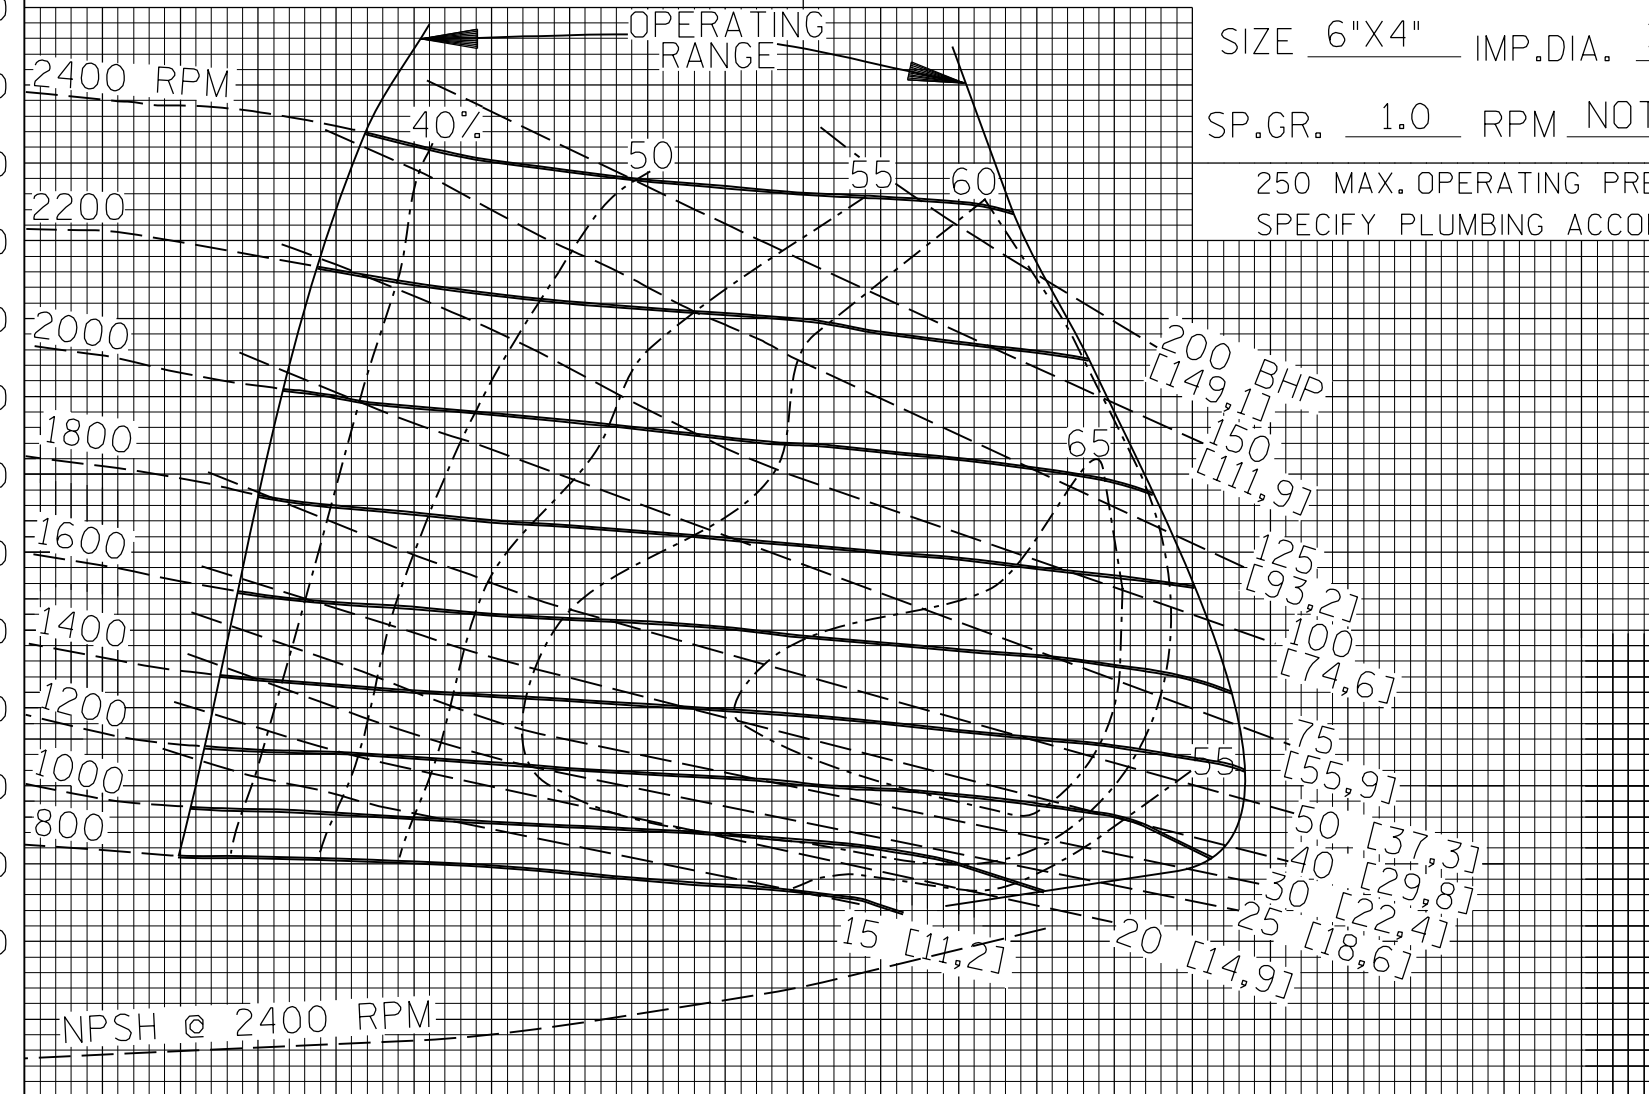

NPSH

FT	M
0	0
10	3
20	6
30	9
40	12

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10



C-9-15-R

FILE NO. 6504eb.s01