

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	1350	1450	1550	1650-1750	1850-2150
FEET	4	5	8	10	13	16	18	19	20	21	22	25
METERS	1,2	1,5	2,4	3,1	4,0	4,9	5,5	5,8	6,1	6,4	6,7	7,6


Figure NPSH required prior to using above table.
DO NOT use as available Suction Lift.

2.50"/[63,5 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE

VOLUTE 11405D
 11405B CURVE T3CSC-B-4
 IMPELLER 11406 MODEL T3CSC-B
 SIZE 3"X3" IMP.DIA. 8.75"
 SP.GR. 1.0 RPM NOTED

Note:
Select performance within
operating range of curve.

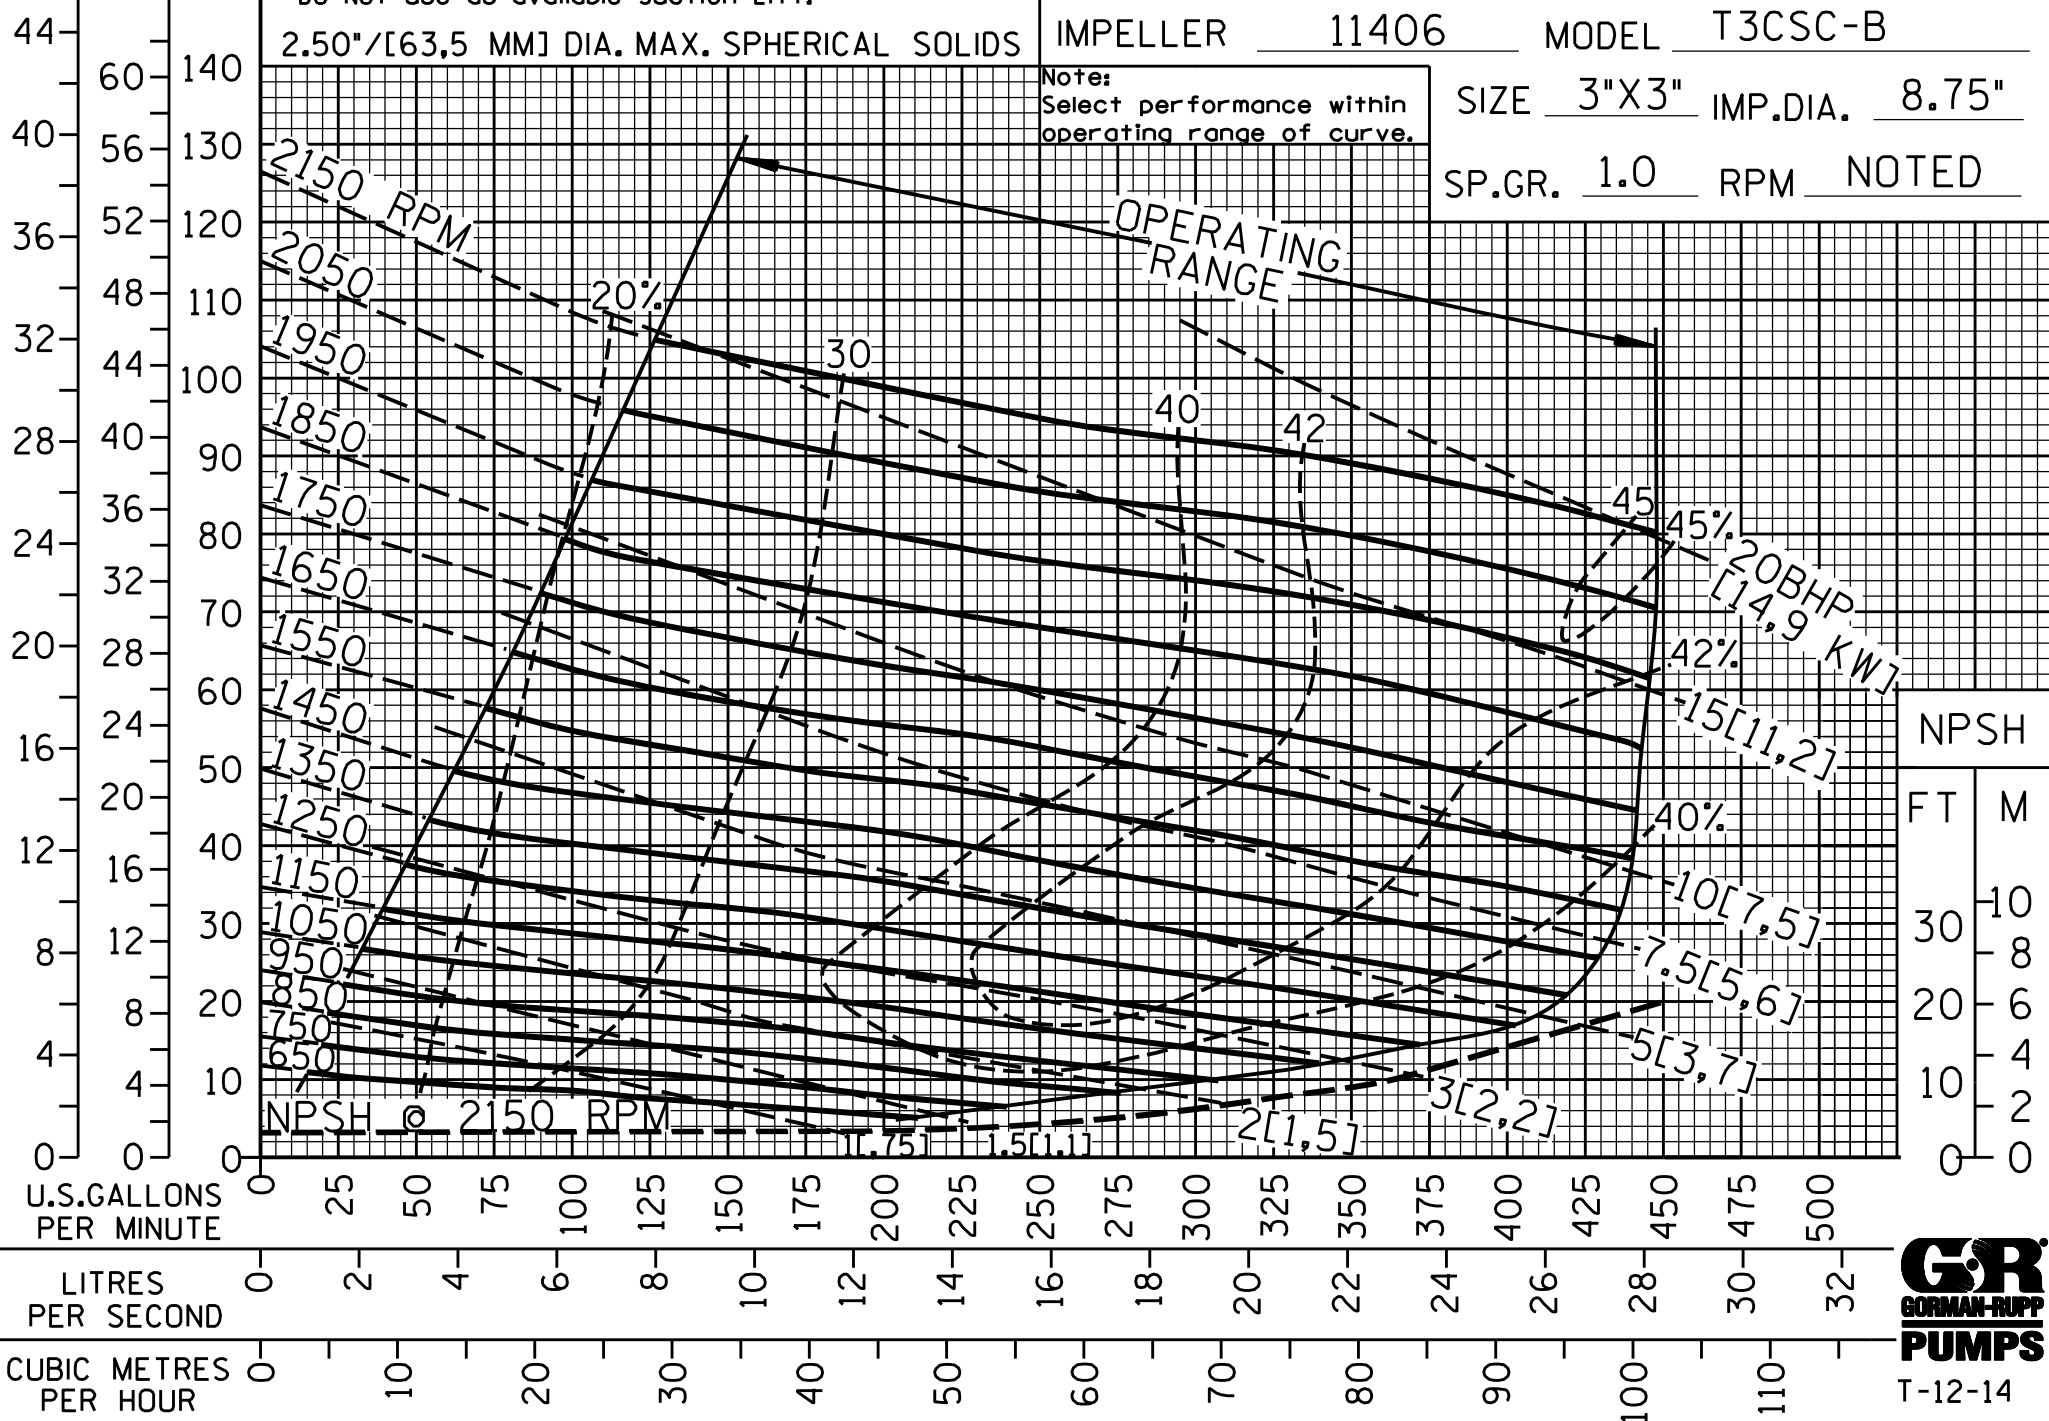

NPSH
 FT M
 10
 8
 6
 4
 2
 0

