


TOTAL HEAD

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATION

PERFORMANCE CURVE

VOLUTE 26821-752 CURVE VGH1 1/2D-B-8
 IMPELLER 26821-119 MODEL VGH1 1/2D-B
 SIZE 2.5"X1.5" IMP.DIA. NOTED
 SP.GR. .80 RPM 1750

M PSI FT
 44 50 140
 40 45 130
 36 40 120
 32 35 110
 28 30 90
 24 25 80
 20 20 60
 16 15 50
 12 10 40
 8 5 30
 4 0 20
 0 0 0

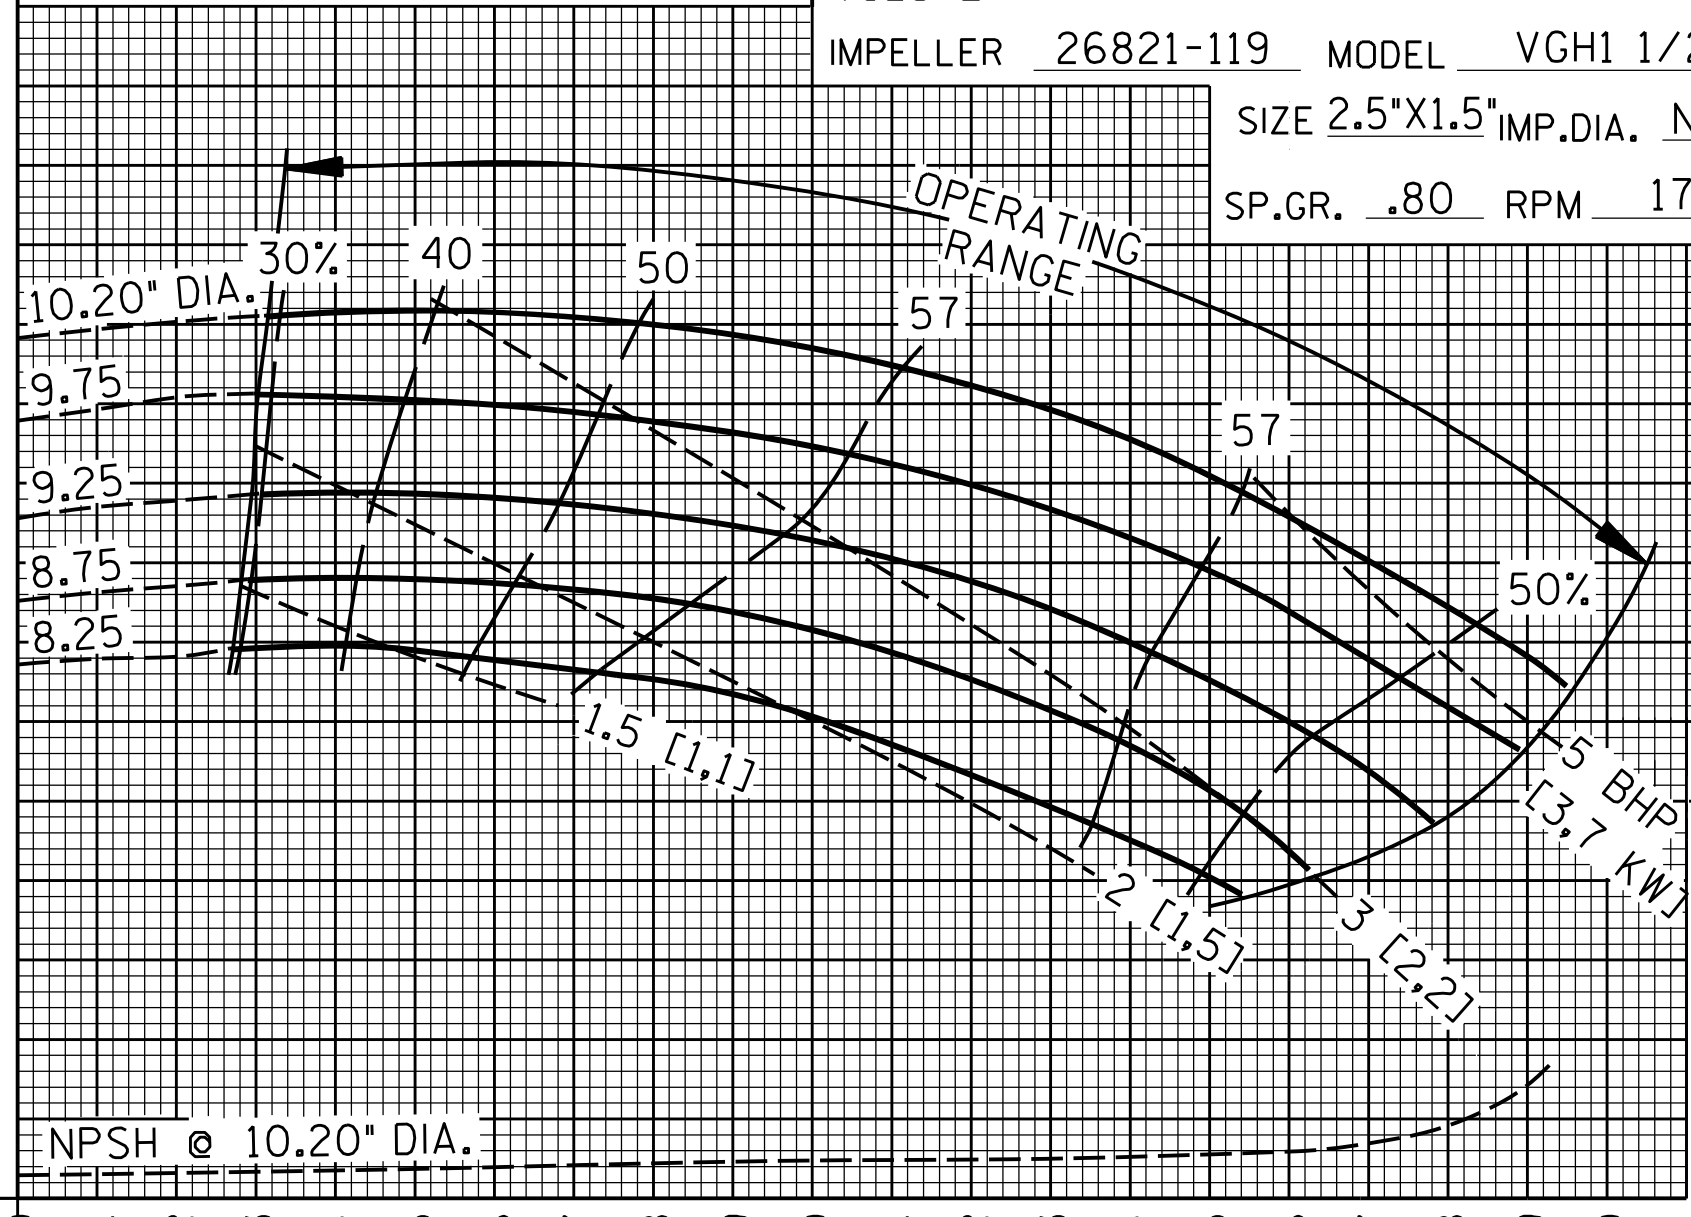

U.S.GALLONS PER MINUTE X 10
 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20
 LITRES PER SECOND
 0 1 2 3 4 5 6 7 8 9 10 11 12 13
 CUBIC METRES PER HOUR
 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46

NPSH
 FT M
 30 10
 20 8
 10 6
 0 4
 0 2
 0 0

1.5 BHP [3.7 KW]
 2 [1,5]
 3 [2,2]

NPSH @ 10.20" DIA.

