

TOTAL HEAD


250 MAX OPERATING PRESSURE  
SPECIFY PLUMBING ACCORDINGLY  
JACK SHAFT REQUIRED ON ALL  
V-BELT APPLICATION

PERFORMANCE CURVE

VOLUTE 26821-753 CURVE VGH2D-B-2  
 IMPELLER 26821-102 MODEL VGH2D-B  
 SIZE 3"X2" IMP.DIA. NOTED  
 SP.GR. 1.0 RPM 3450

M  
PSI  
FT  
220  
300  
200  
180  
160  
140  
120  
100  
80  
60  
40  
20  
0

U.S. GALLONS PER MINUTE  
LITRES PER SECOND  
CUBIC METRES PER HOUR

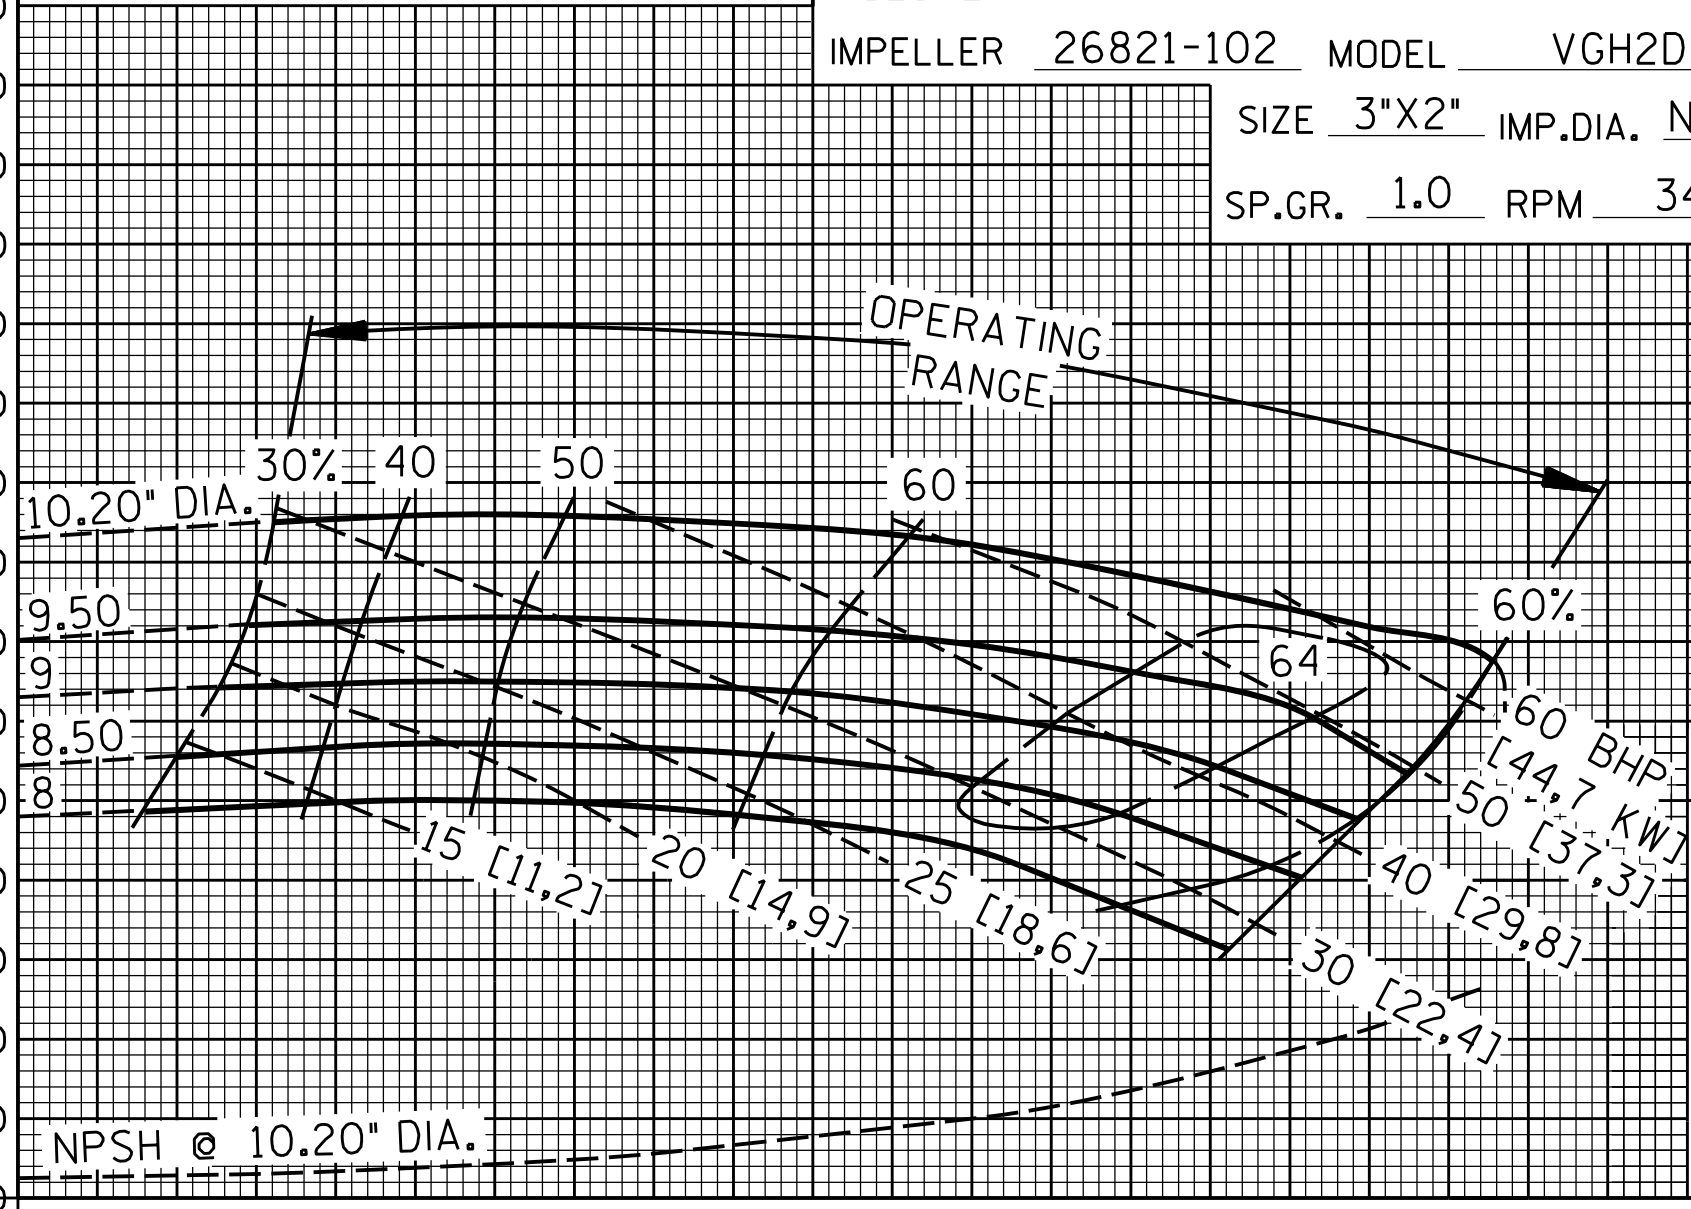

NPSH  
FT  
M  
10  
8  
6  
4  
2  
0

10.20" DIA.

OPERATING RANGE

NPSH @ 10.20" DIA.

SIZE 3"X2" IMP.DIA. NOTED

SP.GR. 1.0 RPM 3450

60 BHP [44.7 KW]  
 50 [37.3]  
 40 [29.8]  
 30 [22.4]  
 25 [18.6]  
 20 [14.9]  
 15 [11.2]

