

TOTAL HEAD

50 HZ.
JACK SHAFT REQUIRED ON ALL
V-BELT APPLICATION

PERFORMANCE CURVE


VOLUTE 26821-753 CURVE VGH2D-B-6
 IMPELLER 26821-102 MODEL VGH2D-B
 SIZE 3"X2" IMP.DIA. NOTED
 SP.GR. .80 RPM 2900

M PSI FT
 130 375
 110 350
 120 325
 100 300
 110 275
 90 250
 80 225
 70 200
 60 175
 50 150
 40 125
 30 100
 20 75
 10 50
 0 25
 0 0

U.S.GALLONS PER MINUTE
 0 25 50 75 100 125 150 175 200 225 250 275 300 325 350 375 400 425 450 475 500

LITRES PER SECOND
 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32

CUBIC METRES PER HOUR
 0 10 20 30 40 50 60 70 80 90 100 110

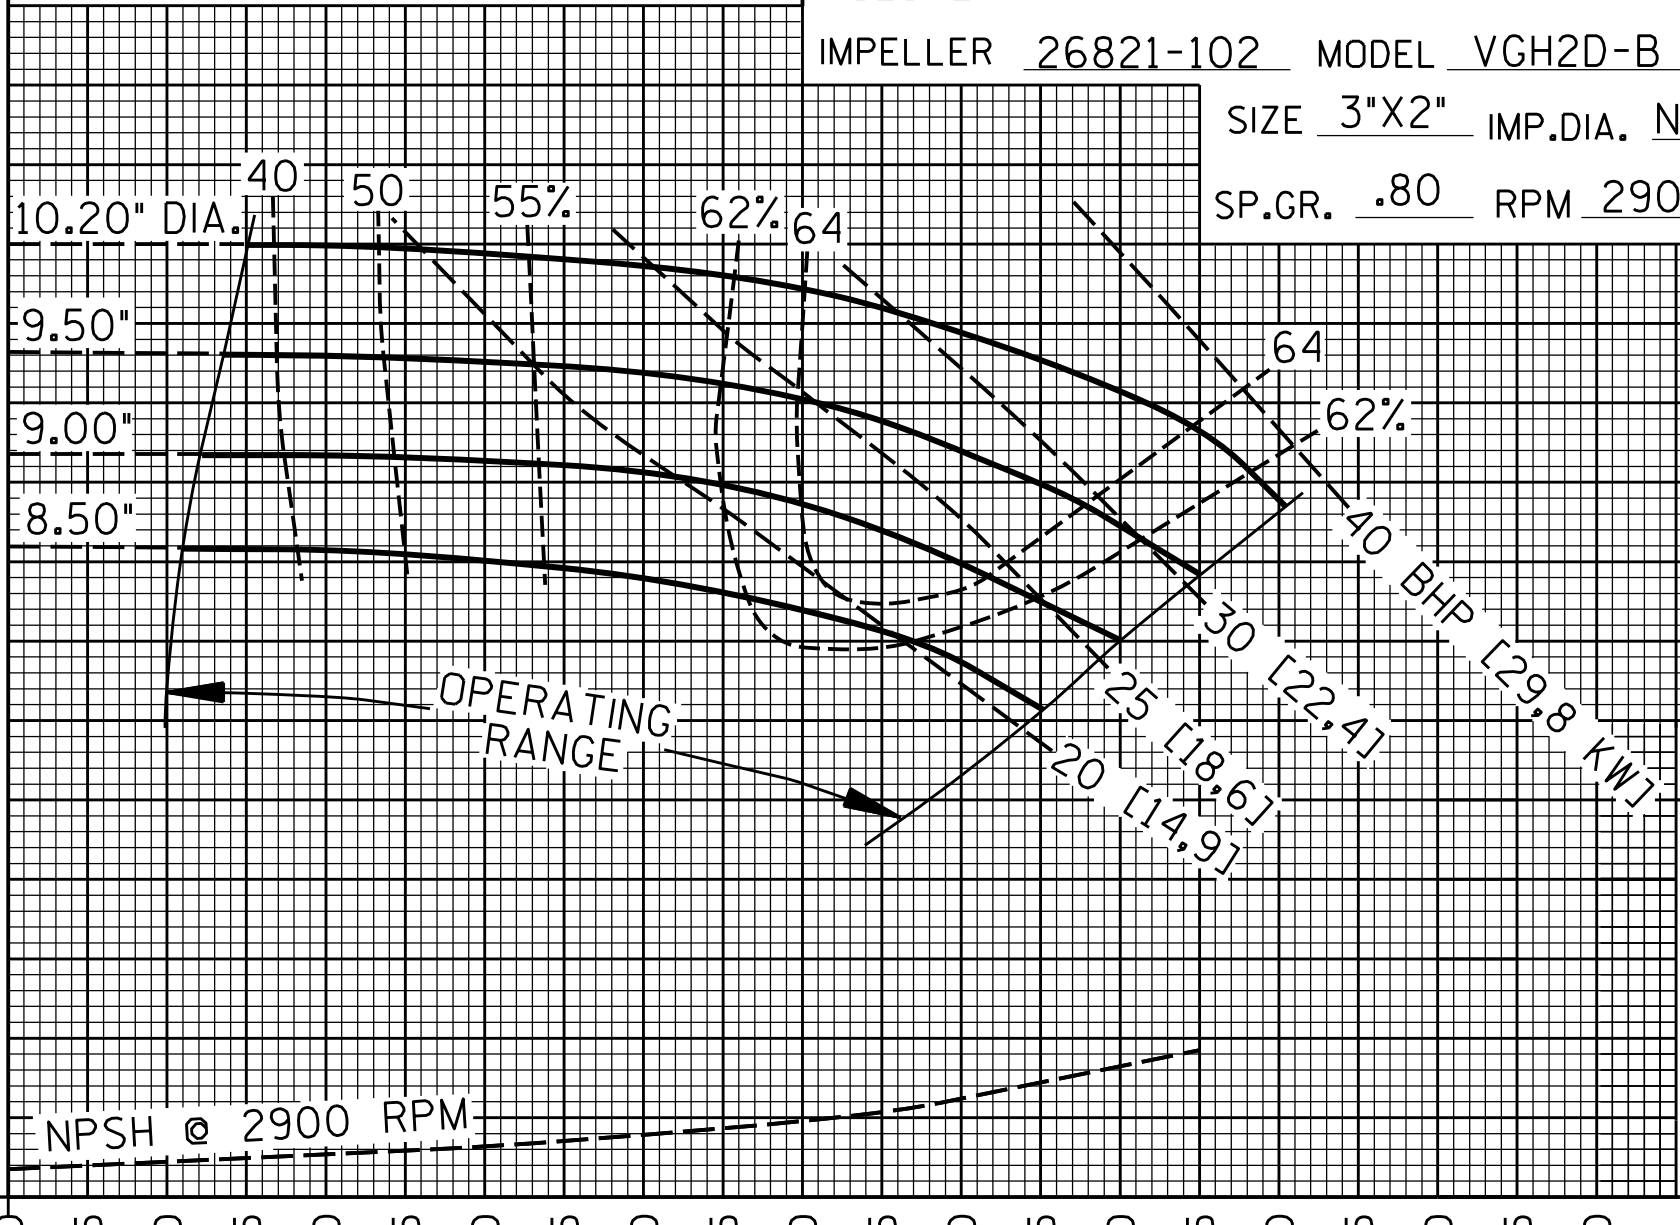

NPSH
 FT M
 30 10
 20 8
 10 6
 0 4
 0 2
 0 0

