


TOTAL HEAD

M PSI FT
 220 250 700
 200 225 650
 180 200 600
 160 175 550
 140 150 500
 120 125 450
 100 100 400
 80 75 350
 60 50 300
 40 25 250
 20 10 200
 0 0 150
 0 0 100
 0 0 50
 U.S. GALLONS PER MINUTE
 LITRES PER SECOND
 CUBIC METRES PER HOUR

250 MAX OPERATING PRESSURE
 SPECIFY PLUMBING ACCORDINGLY
 JACK SHAFT REQUIRED ON ALL
 V-BELT APPLICATION
 50 Hz.

PERFORMANCE CURVE

VOLUTE 26821-754 CURVE VGH2E-B-4
 IMPELLER 26821-471 MODEL VGH2E-B
 SIZE 3"X2" IMP.DIA. NOTED
 SP.GR. .80 RPM 2900

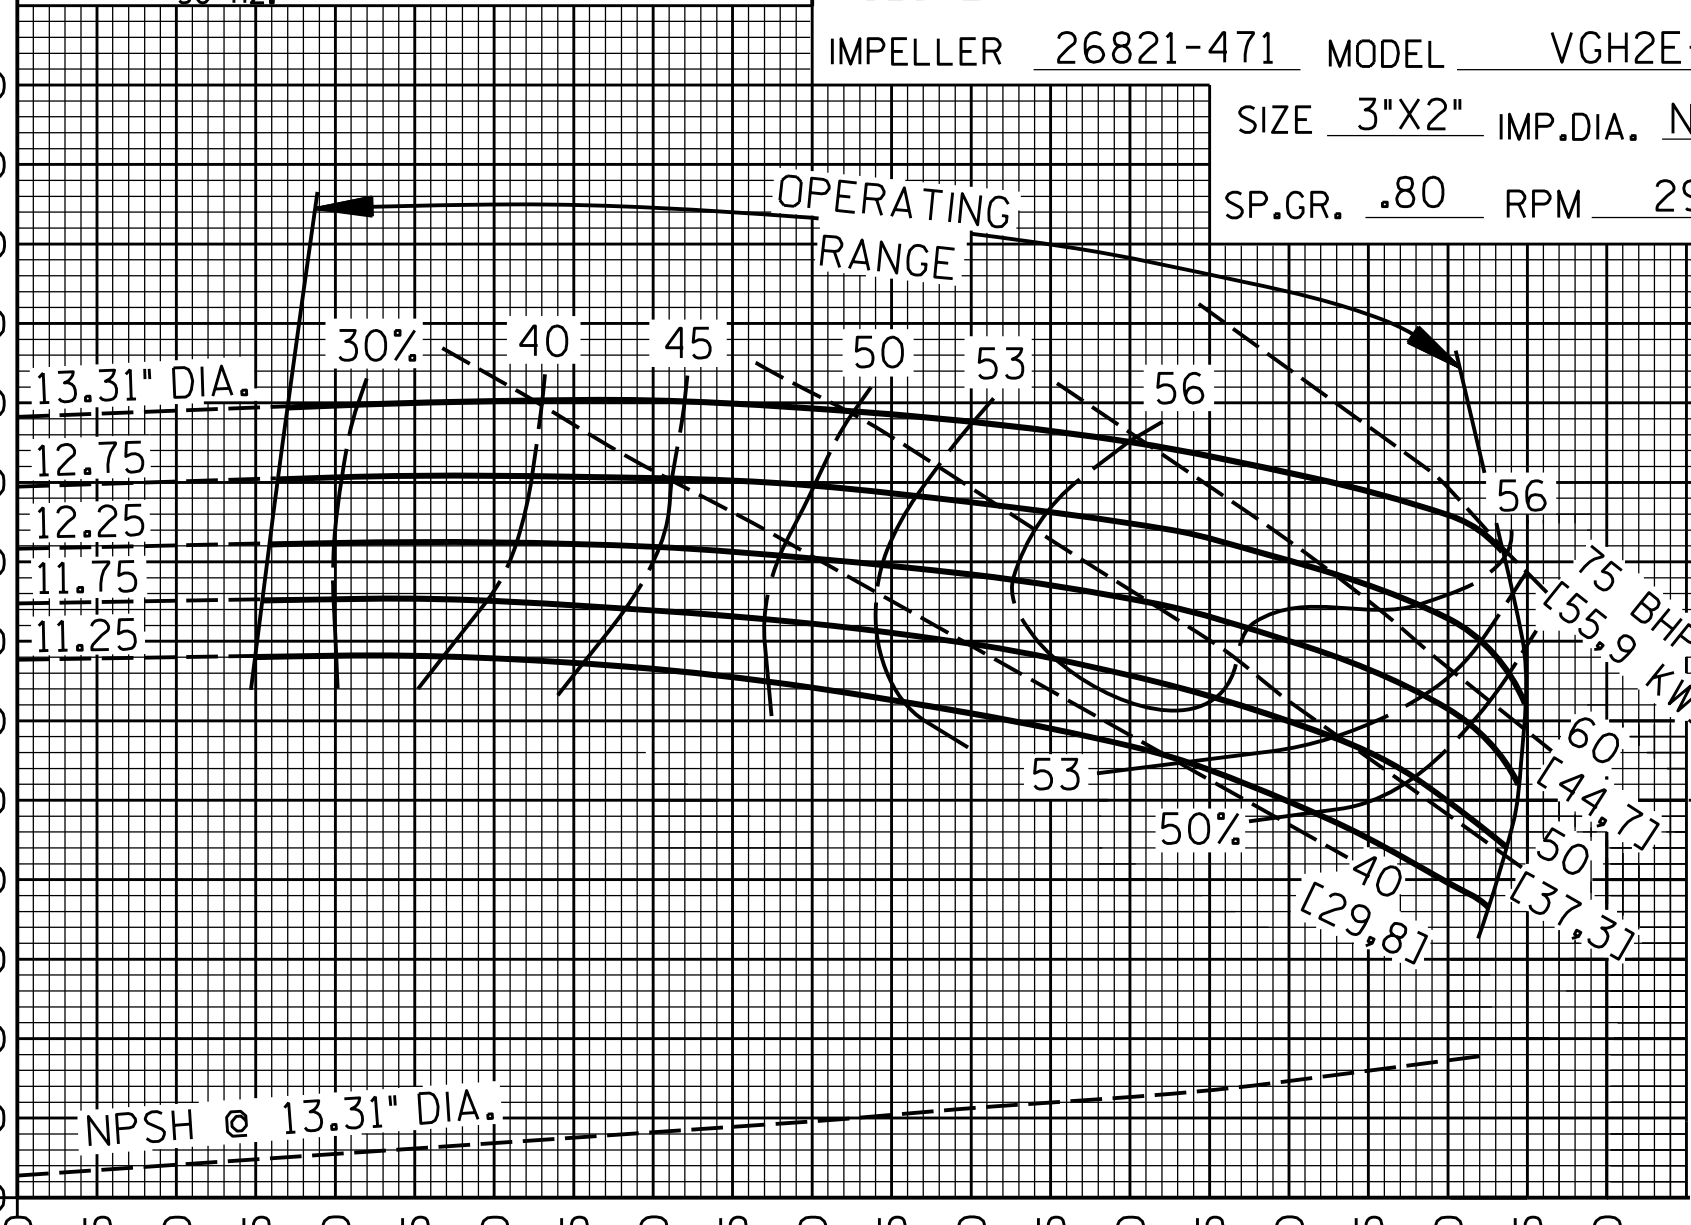

NPSH
 FT M
 10 4
 20 6
 30 8
 40 10

