

TOTAL HEAD

50 HZ.

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS


# PERFORMANCE CURVE

VOLUTE 26821-755 CURVE VGH2 1/2B-B-5  
 IMPELLER 26821-121 MODEL VGH2 1/2B-B  
 SIZE 4"X2.5" IMP.DIA. NOTED  
 SP.GR. 1.0 RPM 1450

M  
22  
20  
18  
16  
14  
12  
10  
8  
6  
4  
2  
0

PSI  
32  
30  
28  
26  
24  
22  
20  
18  
16  
14  
12  
10  
8  
6  
4  
2  
0

FT  
75  
70  
65  
60  
55  
50  
45  
40  
35  
30  
25  
20  
15  
10  
5  
0

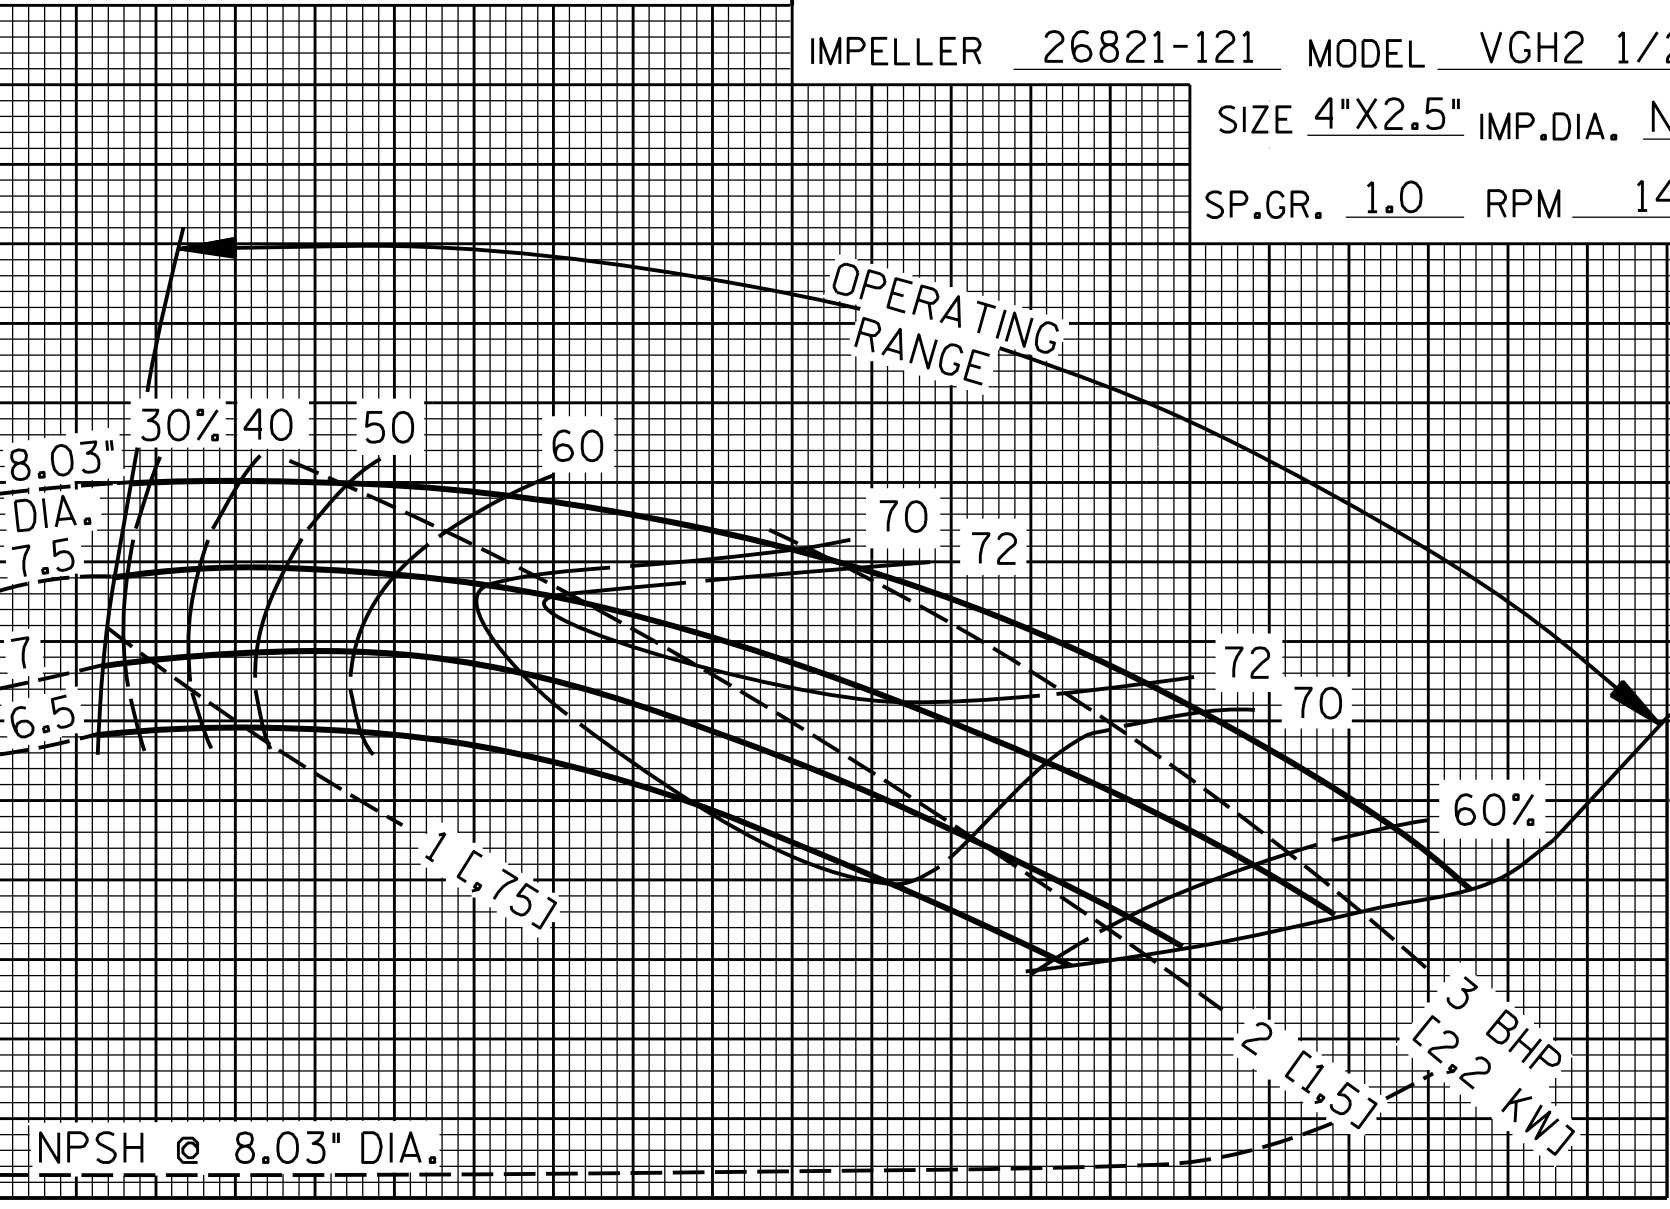

NPSH @ 8.03" DIA.

OPERATING RANGE

NPSH  
FT  
M  
10  
8  
6  
4  
2  
0

U.S. GALLONS PER MINUTE x 10  
0 2 4 6 8 10 12 14 16 18 20 22 24 26

LITRES PER SECOND  
0 2 4 6 8 10 12 14 16 18 20 22 24 26

CUBIC METRES PER HOUR x 10  
0 1 2 3 4 5 6 7 8 9

