

TOTAL HEAD

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS

PERFORMANCE CURVE


VOLUTE 26821-756 CURVE VGH2 1/2C-B-8  
 IMPELLER 26821-472 MODEL VGH2 1/2C-B  
 SIZE 4"x2.5" IMP.DIA. NOTED  
 SP.GR. .80 RPM 1750

M PSI FT  
 44 50 140  
 40 45 130  
 36 40 120  
 32 35 110  
 28 30 100  
 24 25 90  
 20 20 80  
 16 20 70  
 12 15 60  
 8 10 50  
 4 5 40  
 0 0 30  
 0 0 20  
 0 0 10  
 0 0 0

U.S. GALLONS PER MINUTE  
 0 25 50 75 100 125 150 175 200 225 250 275 300 325 350 375 400 425 450 475 500

LITRES PER SECOND  
 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32

CUBIC METRES PER HOUR  
 0 10 20 30 40 50 60 70 80 90 100 110

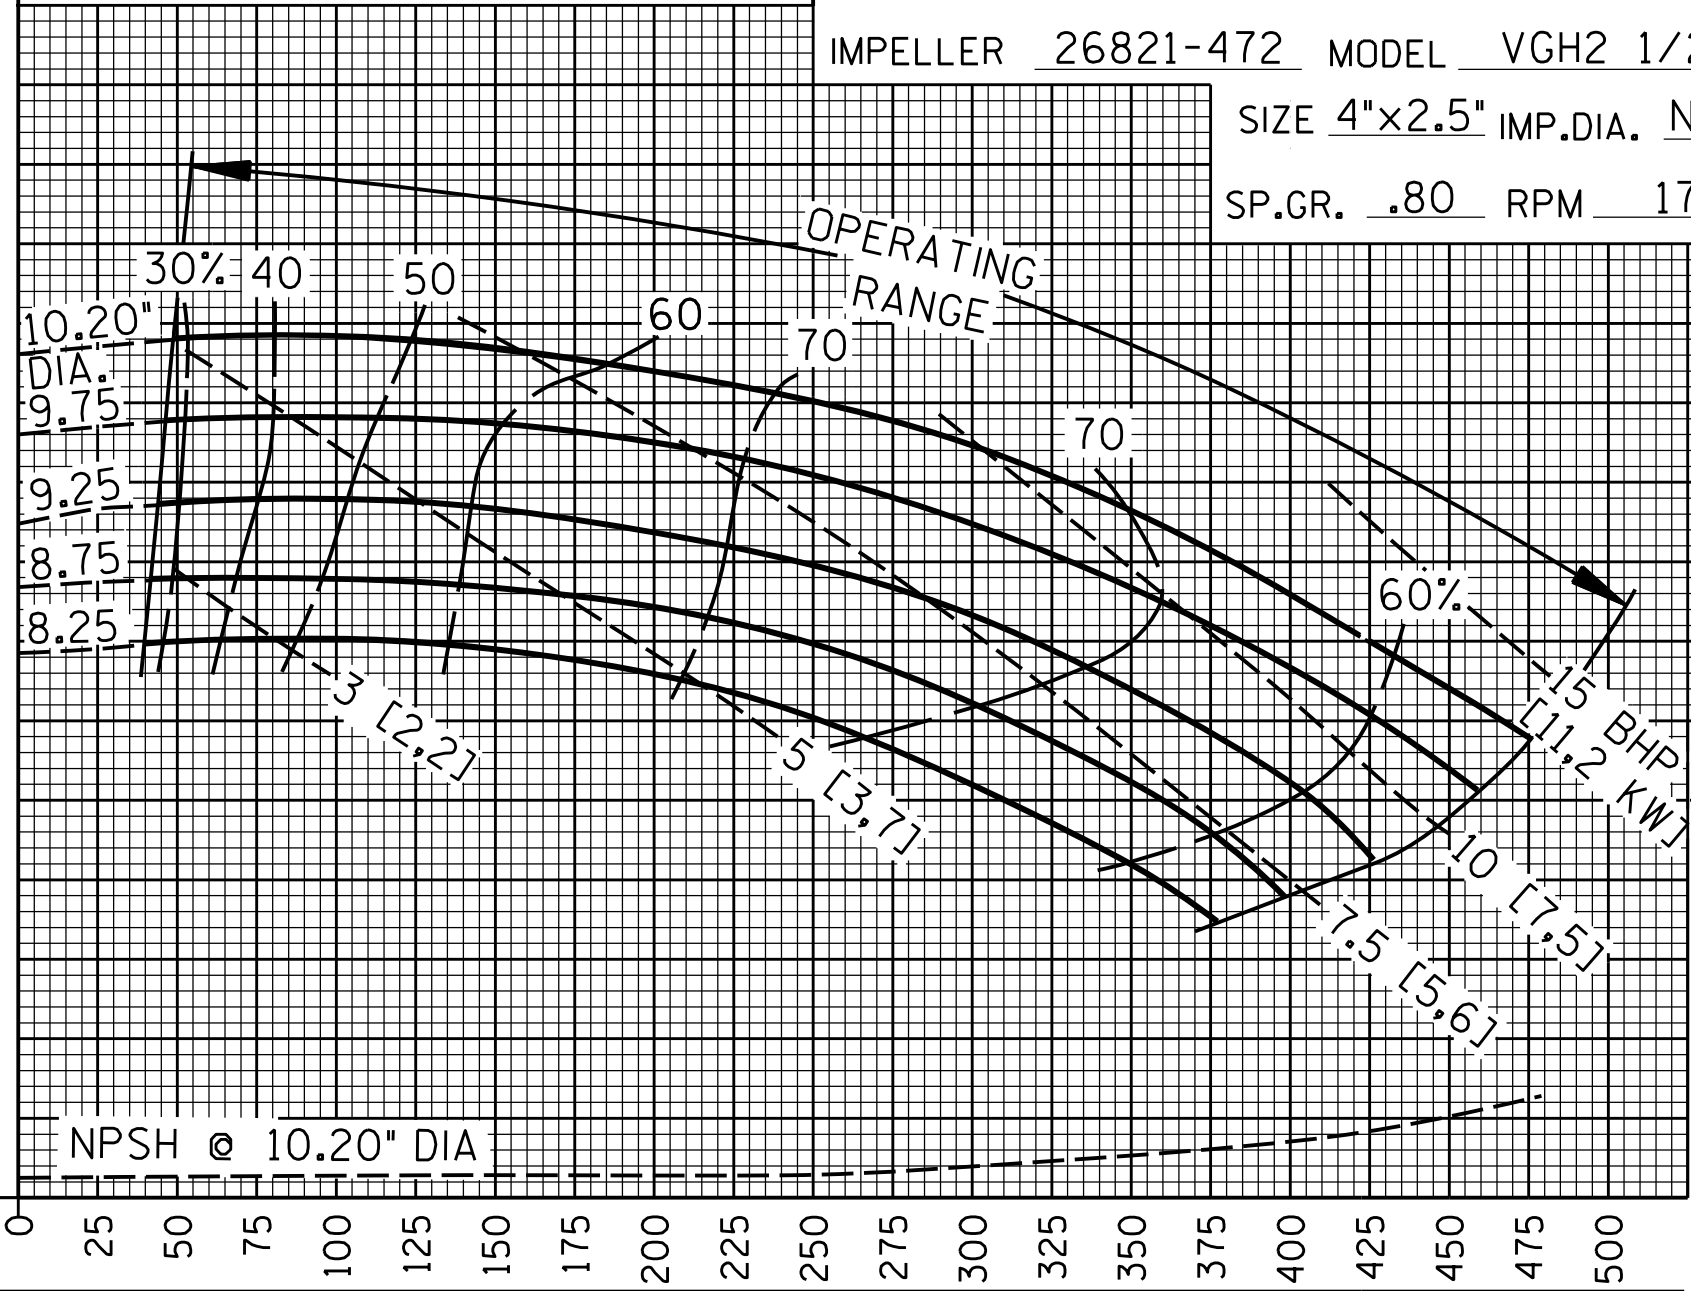

NPSH  
 FT M  
 10 3  
 8 2.4  
 6 1.8  
 4 1.2  
 2 0.6  
 0 0

