


TOTAL HEAD

50 HZ.  
JACK SHAFT REQUIRED ON ALL  
V-BELT APPLICATIONS

# PERFORMANCE CURVE

VOLUTE 26821-757 CURVE VGH2 1/2D-B-6  
IMPELLER 26821-473 MODEL VGH2 1/2D-B  
SIZE 4"X2.5" IMP.DIA. NOTED  
SP.GR. .80 RPM 1450

M	PSI	FT
44	50	140
40	45	130
36	40	120
32	35	110
28	30	90
24	25	80
20	20	60
16	20	50
12	15	40
8	10	30
4	5	20
0	0	0

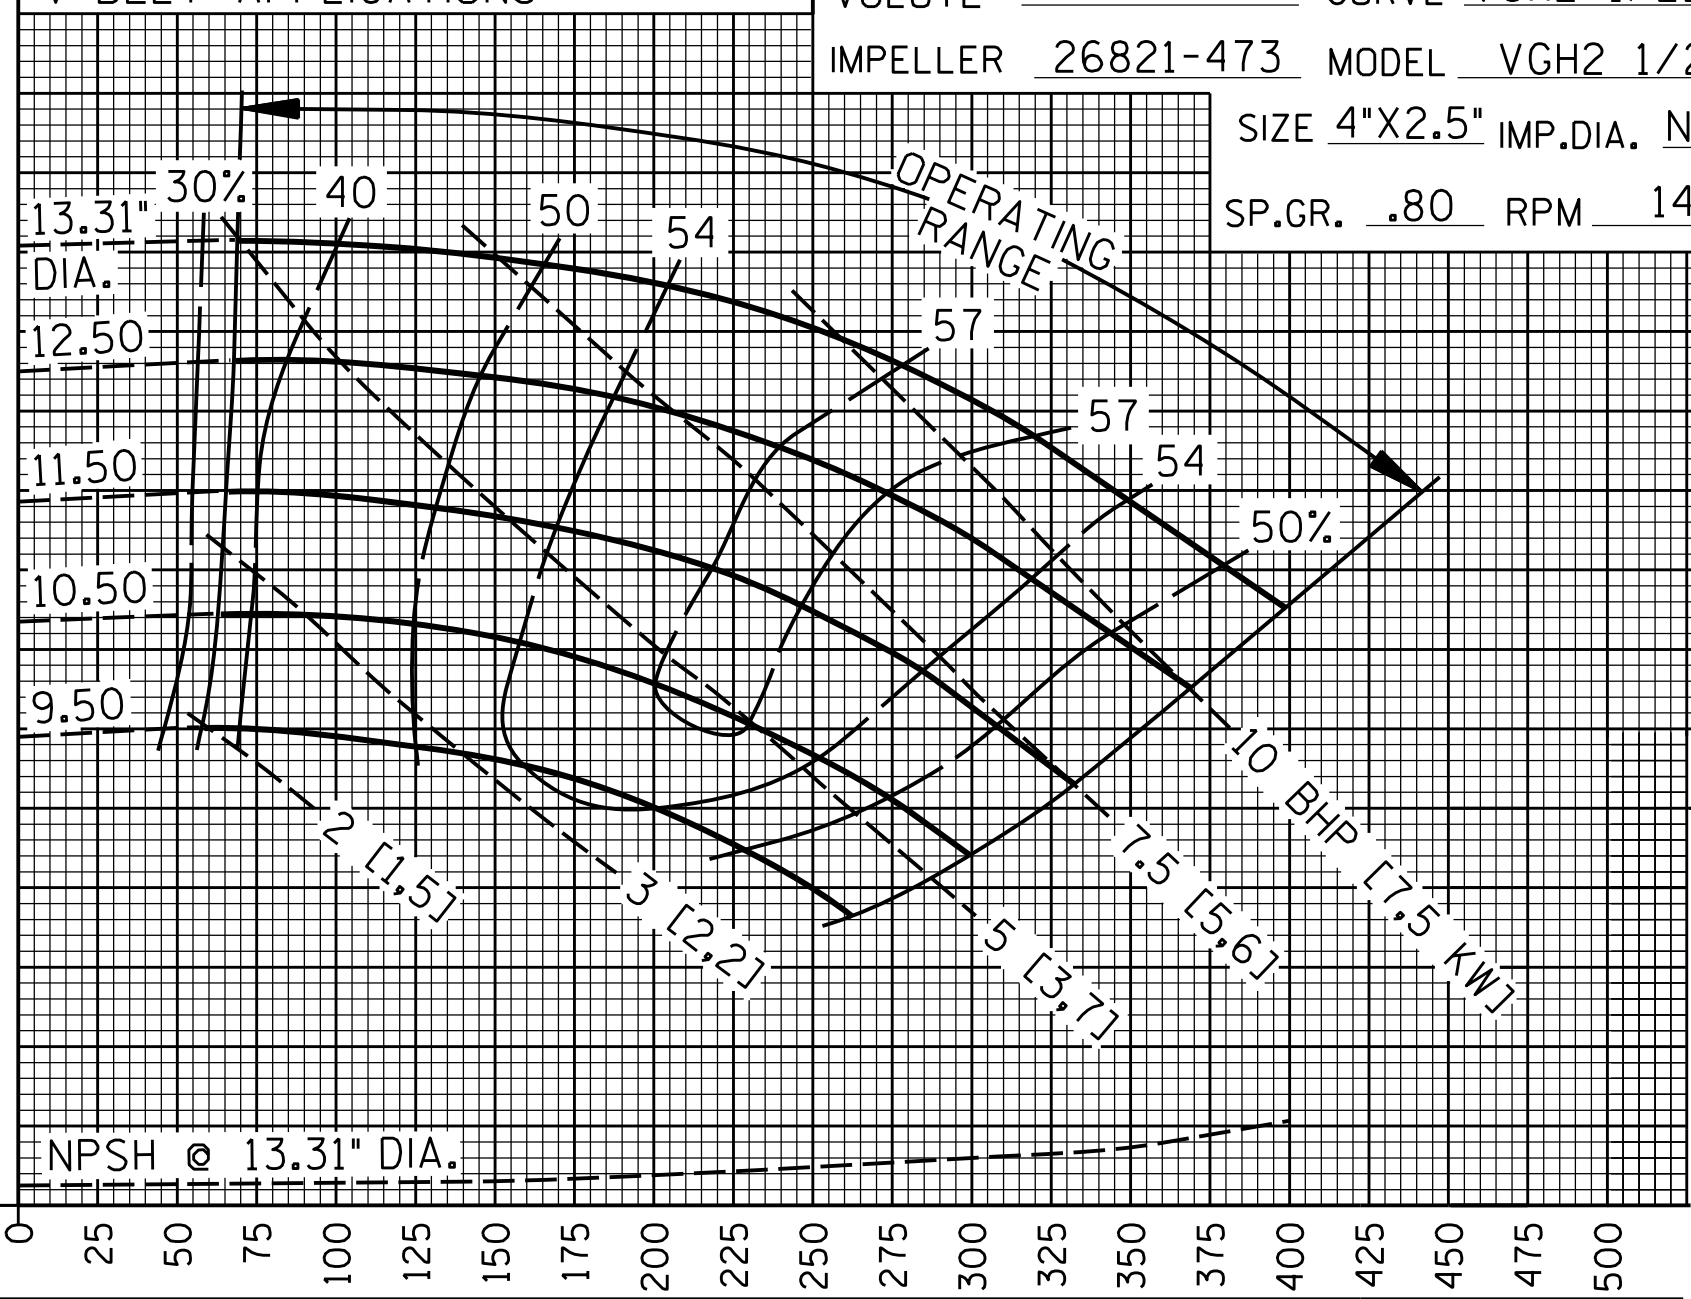

NPSH @ 13.31" DIA.

OPERATING RANGE

10 BHP [7.5 KW]  
7.5 [5.6]  
5 [3.7]  
3 [2.2]  
2 [1.5]

U.S. GALLONS PER MINUTE	LITRES PER SECOND	CUBIC METRES PER HOUR
0	0	0
25	1	10
50	2	20
75	3	30
100	4	40
125	5	50
150	6	60
175	7	70
200	8	80
225	9	90
250	10	100
275	11	110
300	12	120
325	13	130
350	14	140
375	15	150
400	16	160
425	17	170
450	18	180

NPSH	FT	M
0	0	0
10	3	1
20	6	2
30	9	3
40	12	4
50	15	5
60	18	6
70	21	7
80	24	8
90	27	9
100	30	10

