

TOTAL HEAD

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS


PERFORMANCE CURVE

VOLUTE 26821-768 CURVE VGH3B-B-4
 IMPELLER 26821-484 MODEL VGH3B-B
 SIZE 5"X3" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1750

M
22
20
18
16
14
12
10
8
6
4
2
0

PSI
32
30
28
26
24
22
20
18
16
14
12
10
8
6
4
2
0

FT
75
70
65
60
55
50
45
40
35
30
25
20
15
10
5
0

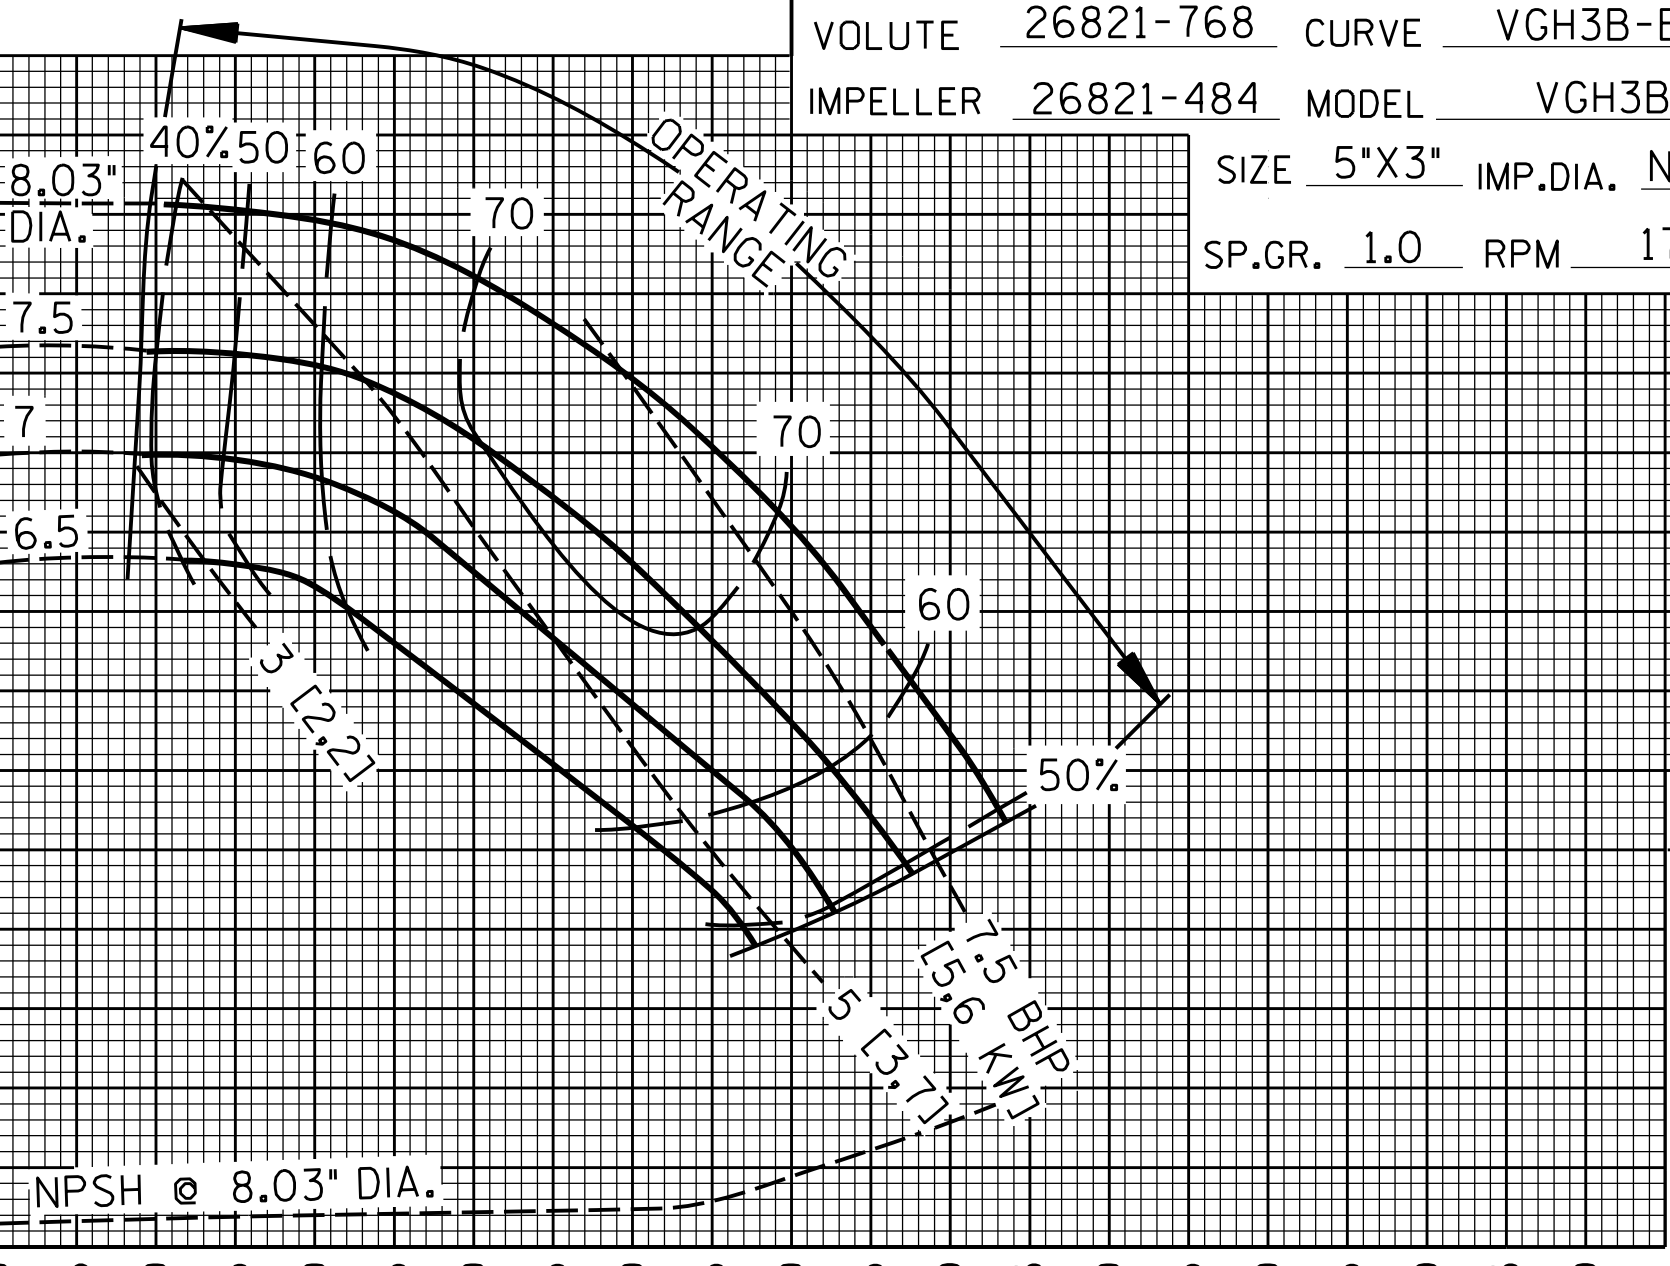

NPSH
FT
M

10
8
6
4
2
0

U.S. GALLONS PER MINUTE X 10
0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

LITRES PER SECOND
0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

CUBIC METRES PER HOUR X 10
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

