


TOTAL HEAD

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS

PERFORMANCE CURVE

VOLUTE 26821-769 CURVE VGH3C-B-5  
 IMPELLER 26821-485 MODEL VGH3C-B  
 SIZE 5"X3" IMP.DIA. NOTED  
 SP.GR. .80 RPM 1750

M PSI FT  
 44 50 140  
 40 45 130  
 36 40 120  
 32 35 110  
 28 30 90  
 24 25 80  
 20 20 60  
 16 15 50  
 12 10 40  
 8 5 30  
 4 0 20  
 0 0 10

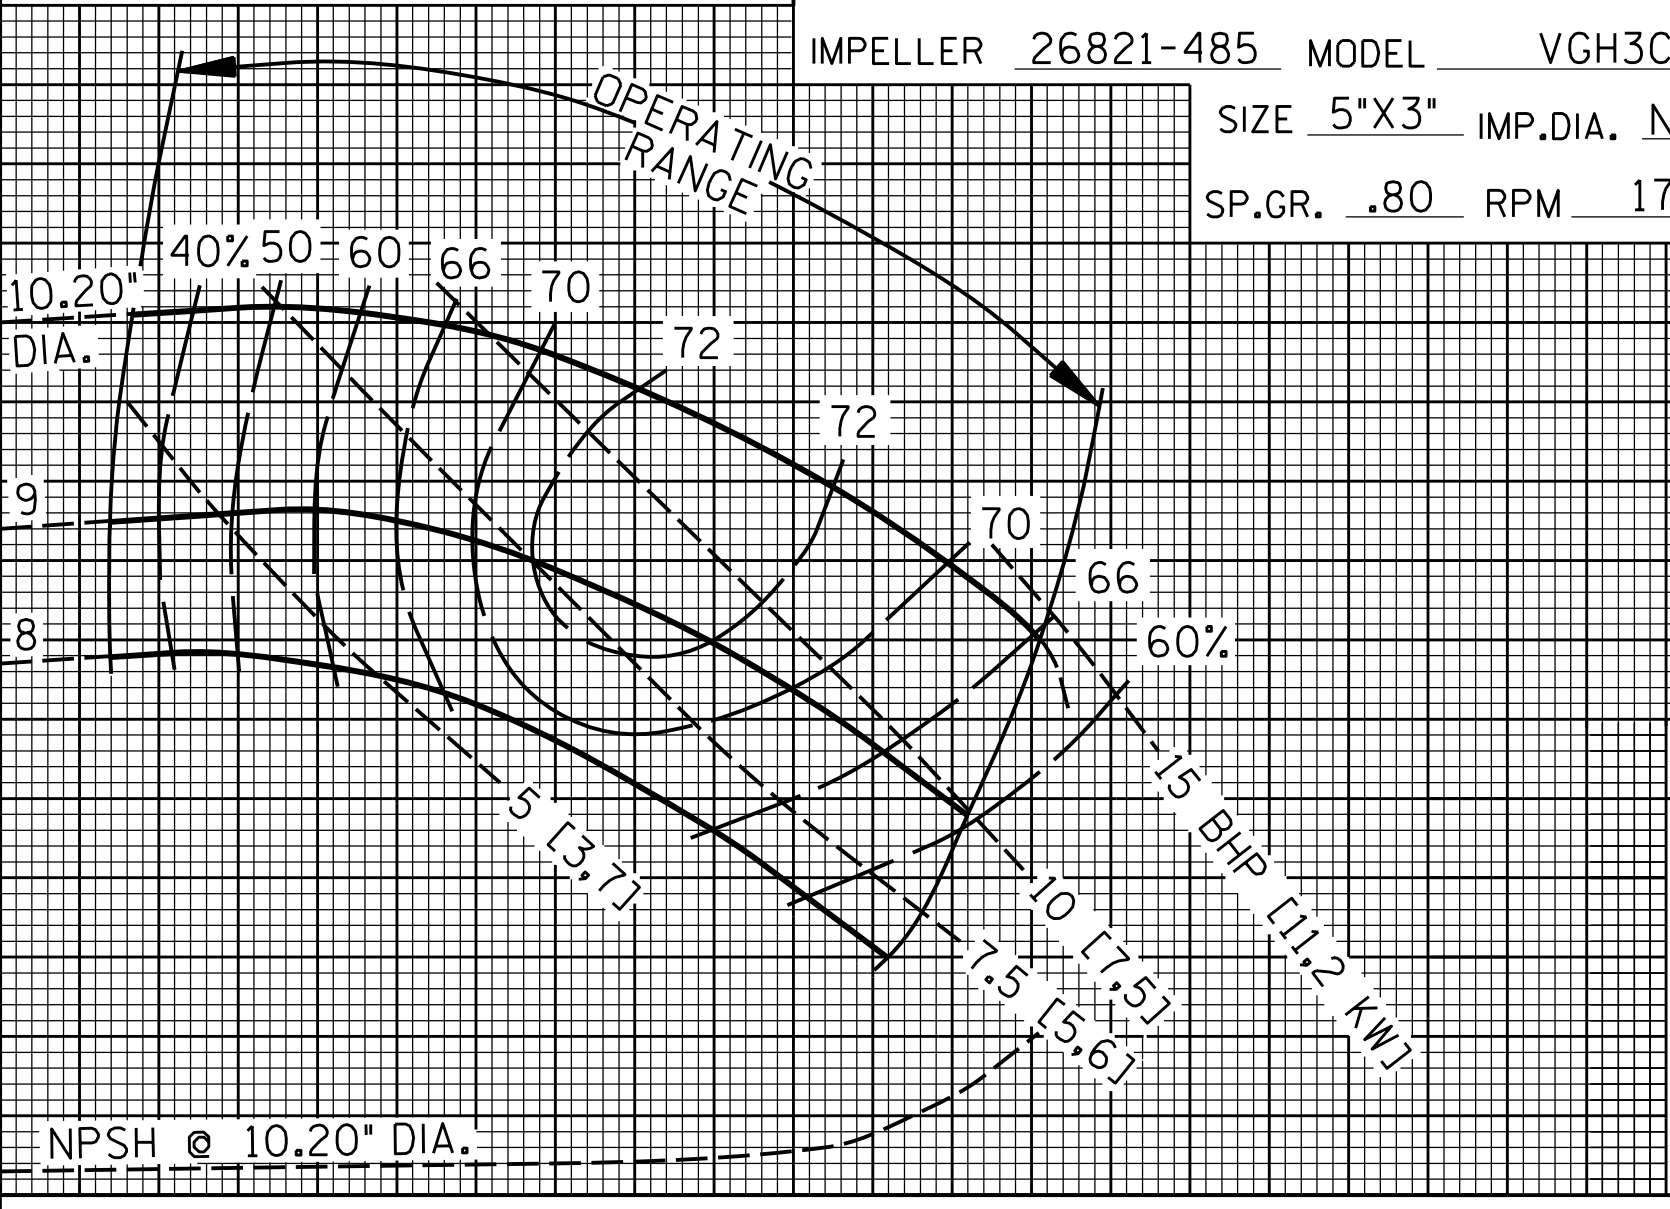

NPSH @ 10.20" DIA.

NPSH  
 FT M  
 30 10  
 20 6  
 10 2  
 0 0

U.S. GALLONS PER MINUTE X 10  
 LITRES PER SECOND  
 CUBIC METRES PER HOUR X 10

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100  
 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64  
 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

