

TOTAL HEAD

50 HZ.
JACK SHAFT REQUIRED ON ALL
V-BELT APPLICATIONS


PERFORMANCE CURVE

VOLUTE 26821-769 CURVE VGH3C-B-6
 IMPELLER 26821-485 MODEL VGH3C-B
 SIZE 5"X3" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 2900

M
110
100
90
80
70
60
50
40
30
20
10
0

PSI
160
140
130
120
110
100
90
80
70
60
50
40
30
20
10
0

FT
375
350
325
300
275
250
225
200
175
150
125
100
75
50
25
0

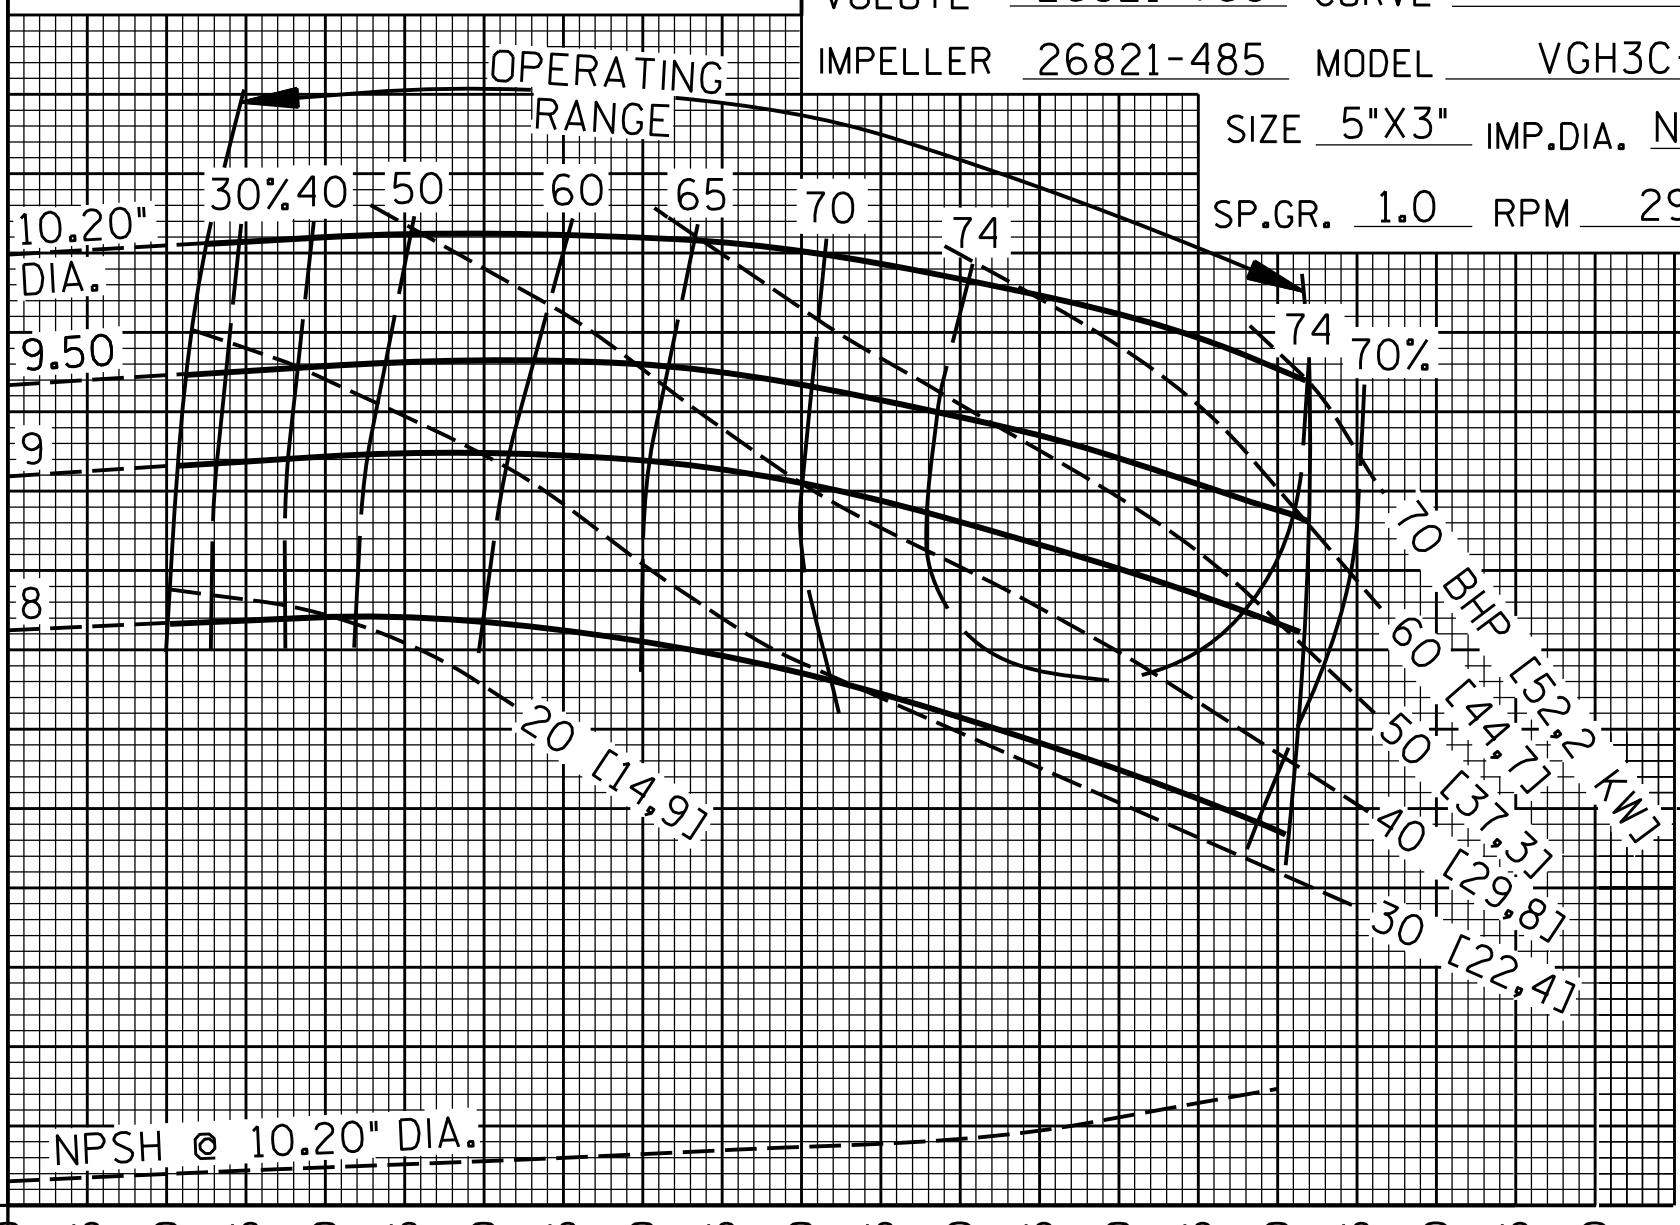

U.S. GALLONS PER MINUTE X 10
0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

LITRES PER SECOND
0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64

CUBIC METRES PER HOUR X 10
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

NPSH
FT
M
30
20
10
0

