

TOTAL HEAD

50 HZ.

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS


# PERFORMANCE CURVE

VOLUTE 26821-769 CURVE VGH3C-B-7  
 IMPELLER 26821-485 MODEL VGH3C-B  
 SIZE 5"X3" IMP.DIA. NOTED  
 SP.GR. .80 RPM 2900

M  
130  
110  
100  
90  
80  
70  
60  
50  
40  
30  
20  
10  
0

PSI  
375  
350  
325  
300  
275  
250  
225  
200  
175  
150  
125  
100  
75  
50  
25  
0

FT  
375  
350  
325  
300  
275  
250  
225  
200  
175  
150  
125  
100  
75  
50  
25  
0

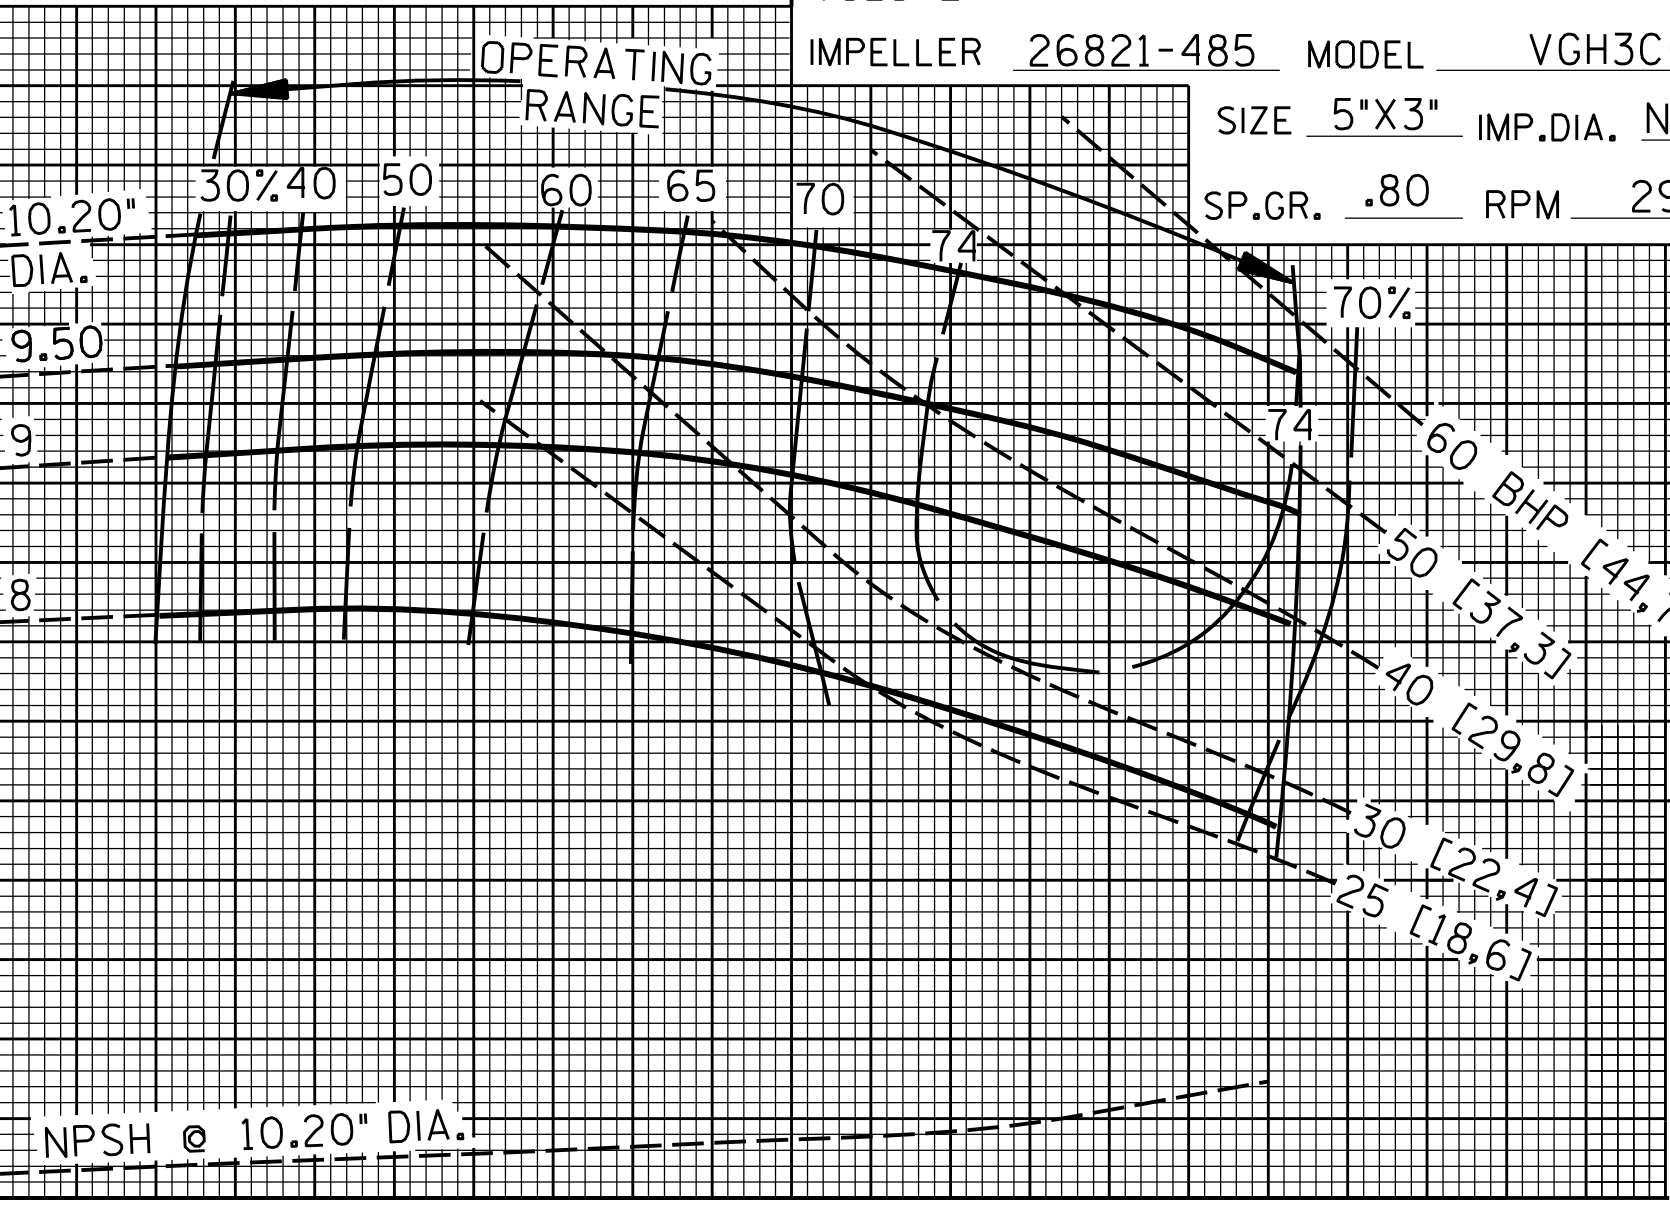

NPSH @ 10.20" DIA.

OPERATING RANGE

70%  
60 BHP [44.7KW]  
50 [37.3]  
40 [29.8]  
30 [22.4]  
25 [18.6]

U.S. GALLONS PER MINUTE X 10

LITRES PER SECOND

CUBIC METRES PER HOUR X 10

NPSH  
FT  
M

