


TOTAL HEAD

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS

PERFORMANCE CURVE

VOLUTE 26821-765 CURVE VGH3E-B-2
 IMPELLER 26821-479 MODEL VGH3E-B
 SIZE 5"X3" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1750

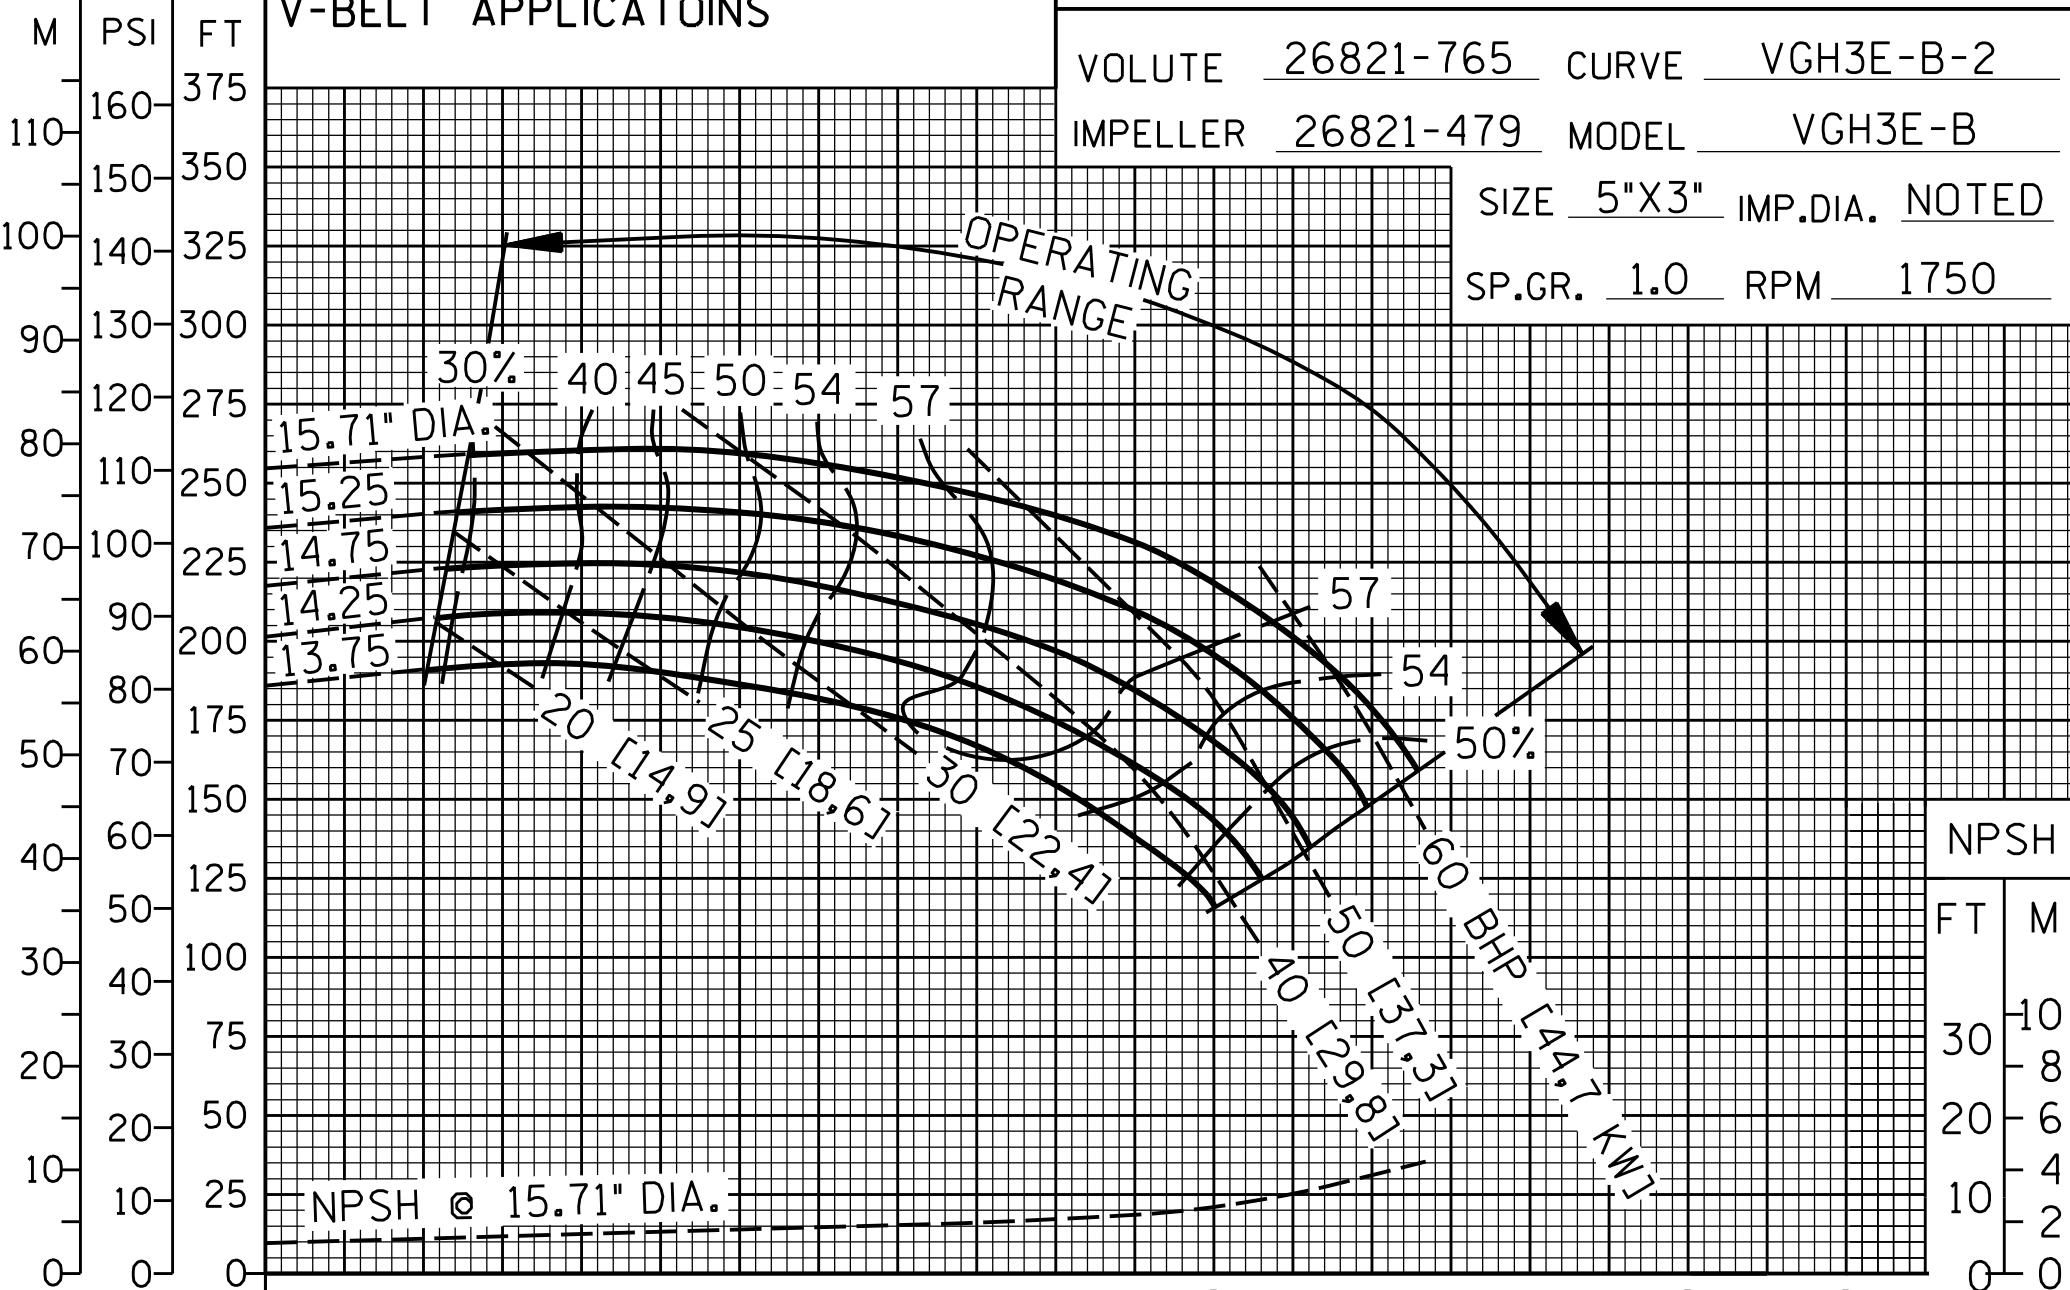

U.S. GALLONS PER MINUTE X 10: 0, 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100

LITRES PER SECOND: 0, 4, 8, 12, 16, 20, 24, 28, 32, 36, 40, 44, 48, 52, 56, 60, 64

CUBIC METRES PER HOUR X 10: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23

NPSH FT: 0, 10, 20, 30, 40, 50, 60, 70, 80, 90, 100, 110, 120, 130, 140, 150, 160, 175, 200, 225, 250, 275, 300, 325, 350, 375

NPSH M: 0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64



T-12-23-R