

TOTAL HEAD

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS


PERFORMANCE CURVE

VOLUTE 26821-759 CURVE VGH4D-B-2  
 IMPELLER 26821-476 MODEL VGH4D-B  
 SIZE 5"X4" IMP.DIA. NOTED  
 SP.GR. 1.0 RPM 1750

M  
110  
100  
90  
80  
70  
60  
50  
40  
30  
20  
10  
0

PSI  
160  
150  
140  
130  
120  
110  
100  
90  
80  
70  
60  
50  
40  
30  
20  
10  
0

FT  
375  
350  
325  
300  
275  
250  
225  
200  
175  
150  
125  
100  
75  
50  
25  
0

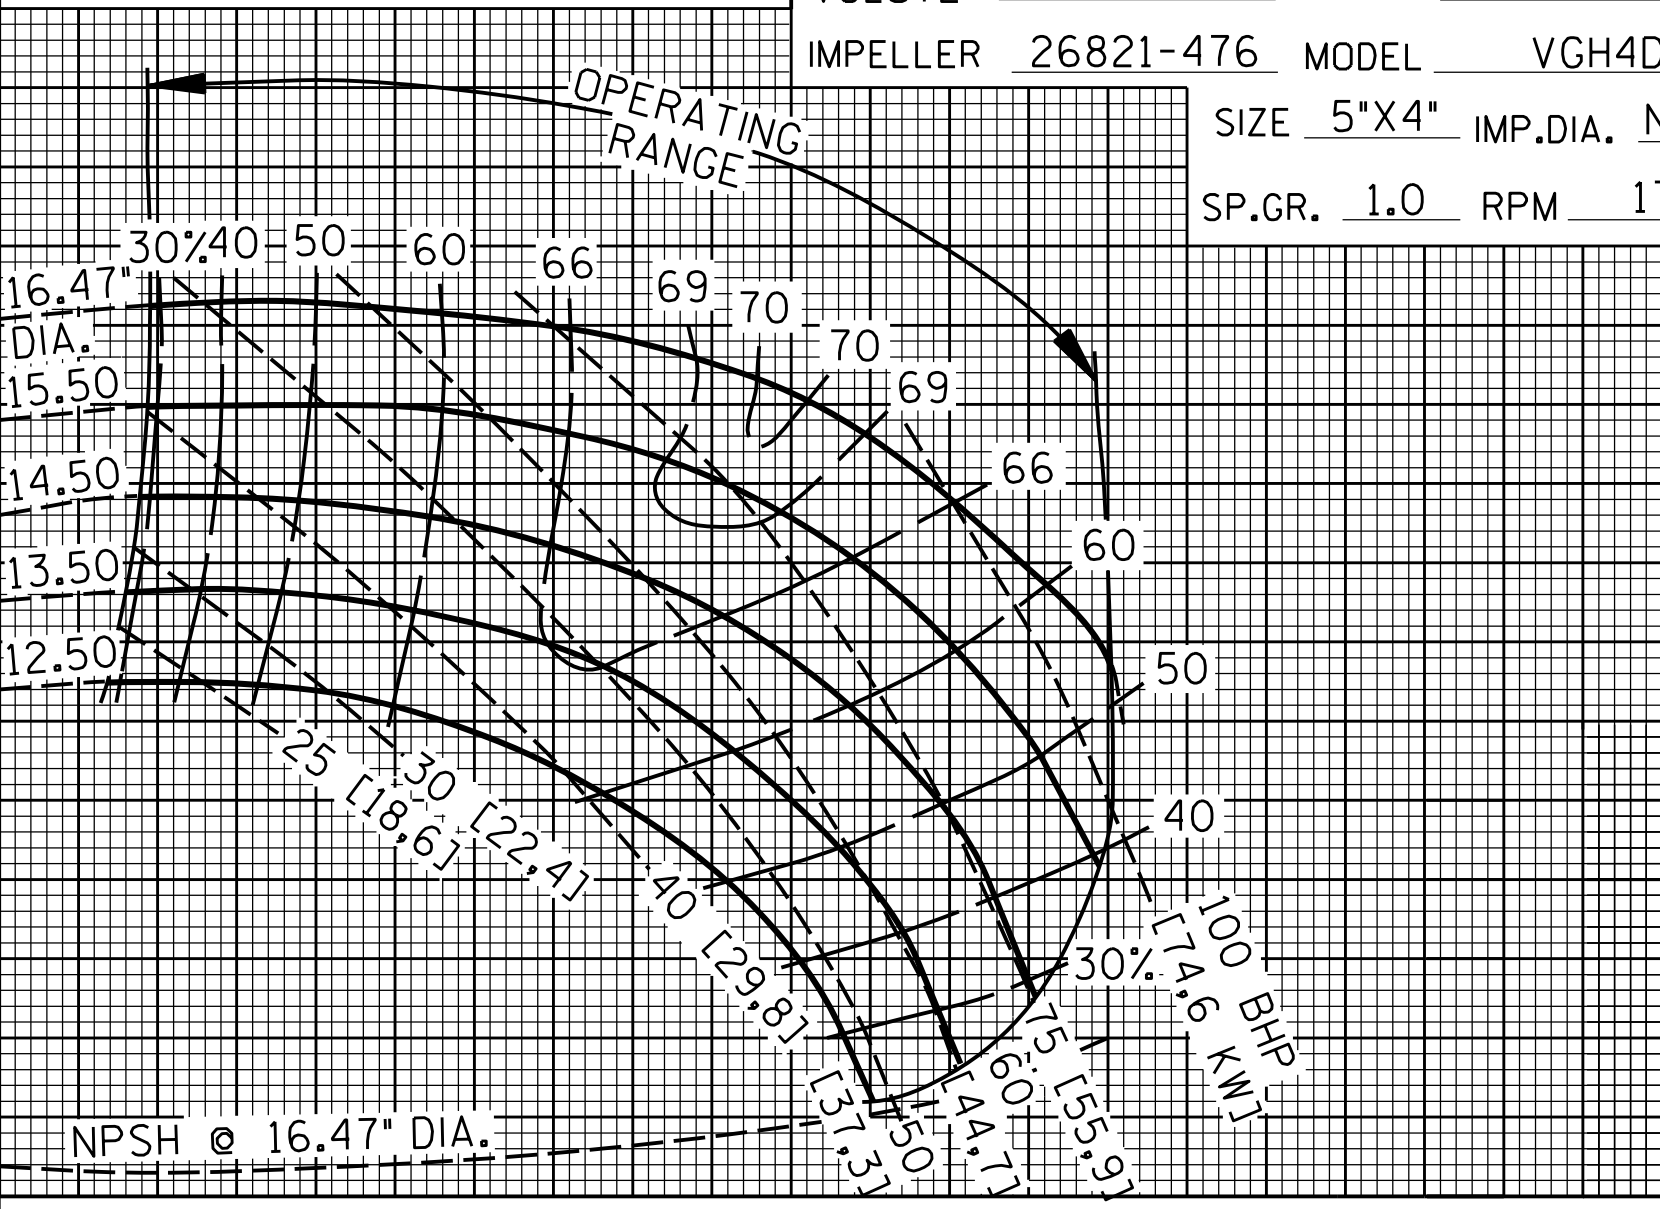

U.S. GALLONS PER MINUTE X 100  
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

LITRES PER SECOND X 10  
0 1 2 3 4 5 6 7 8 9 10 11 12 13

CUBIC METRES PER HOUR X 10  
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46

NPSH  
FT  
M  
30  
20  
10  
0

