

TOTAL HEAD

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS


PERFORMANCE CURVE

VOLUTE 26821-759 CURVE VGH4D-B-6
 IMPELLER 26821-476 MODEL VGH4D-B
 SIZE 5"X4" IMP.DIA. NOTED
 SP.GR. .80 RPM 1750

M
130
110
100
90
80
70
60
50
40
30
20
10
0

PSI
375
350
325
300
275
250
225
200
175
150
125
100
75
50
25
0

FT
375
350
325
300
275
250
225
200
175
150
125
100
75
50
25
0

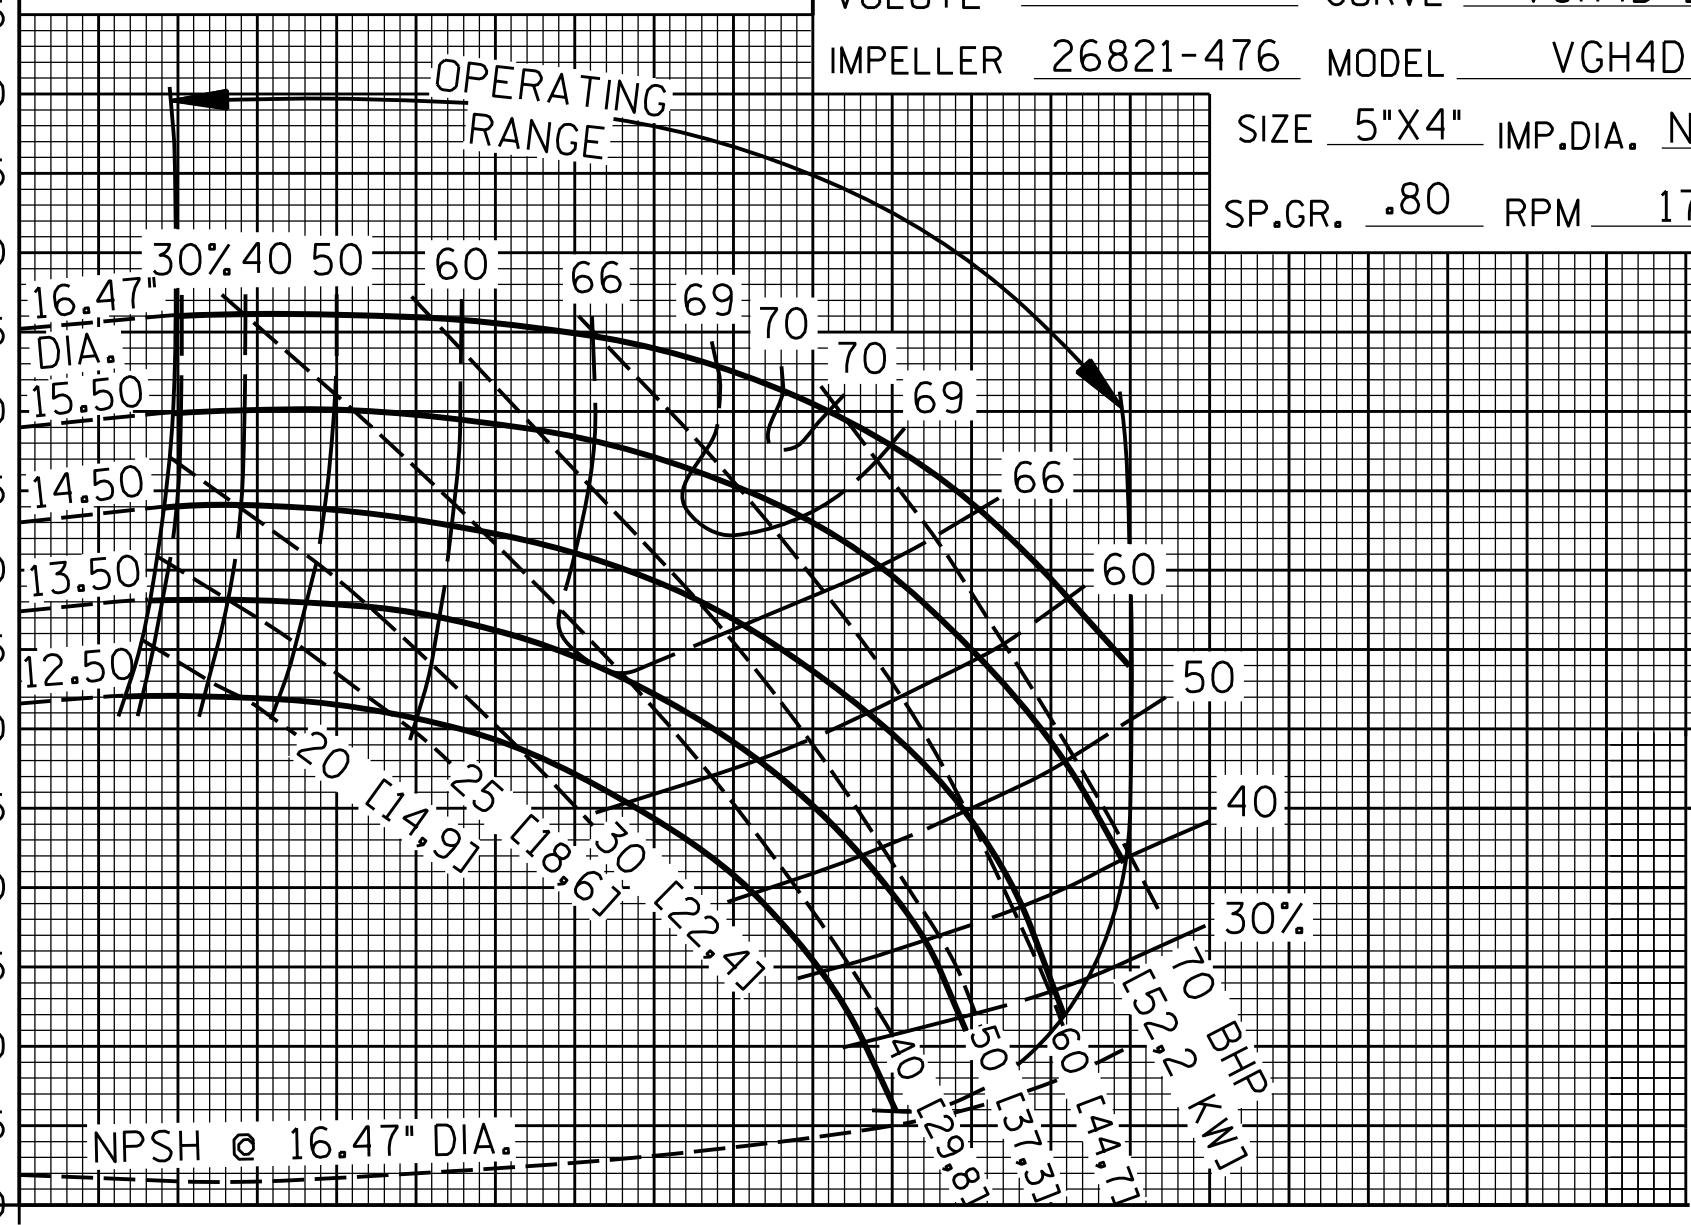

NPSH
FT
M
30
20
10
0

U.S. GALLONS PER MINUTE X 100
0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

LITRES PER SECOND X 10
0 1 2 3 4 5 6 7 8 9 10 11 12 13

CUBIC METRES PER HOUR X 10
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46

