

TOTAL HEAD

50 HZ.

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS


PERFORMANCE CURVE

VOLUTE 26821-763 CURVE VGH6E-B-6
 IMPELLER 26821-480 MODEL VGH6E-B
 SIZE 8"X6" IMP.DIA. NOTED
 SP.GR. 1.0 RPM 1450

M
110
100
90
80
70
60
50
40
30
20
10
0

PSI
160
150
140
130
120
110
100
90
80
70
60
50
40
30
20
10
0

FT
375
350
325
300
275
250
225
200
175
150
125
100
75
50
25
0

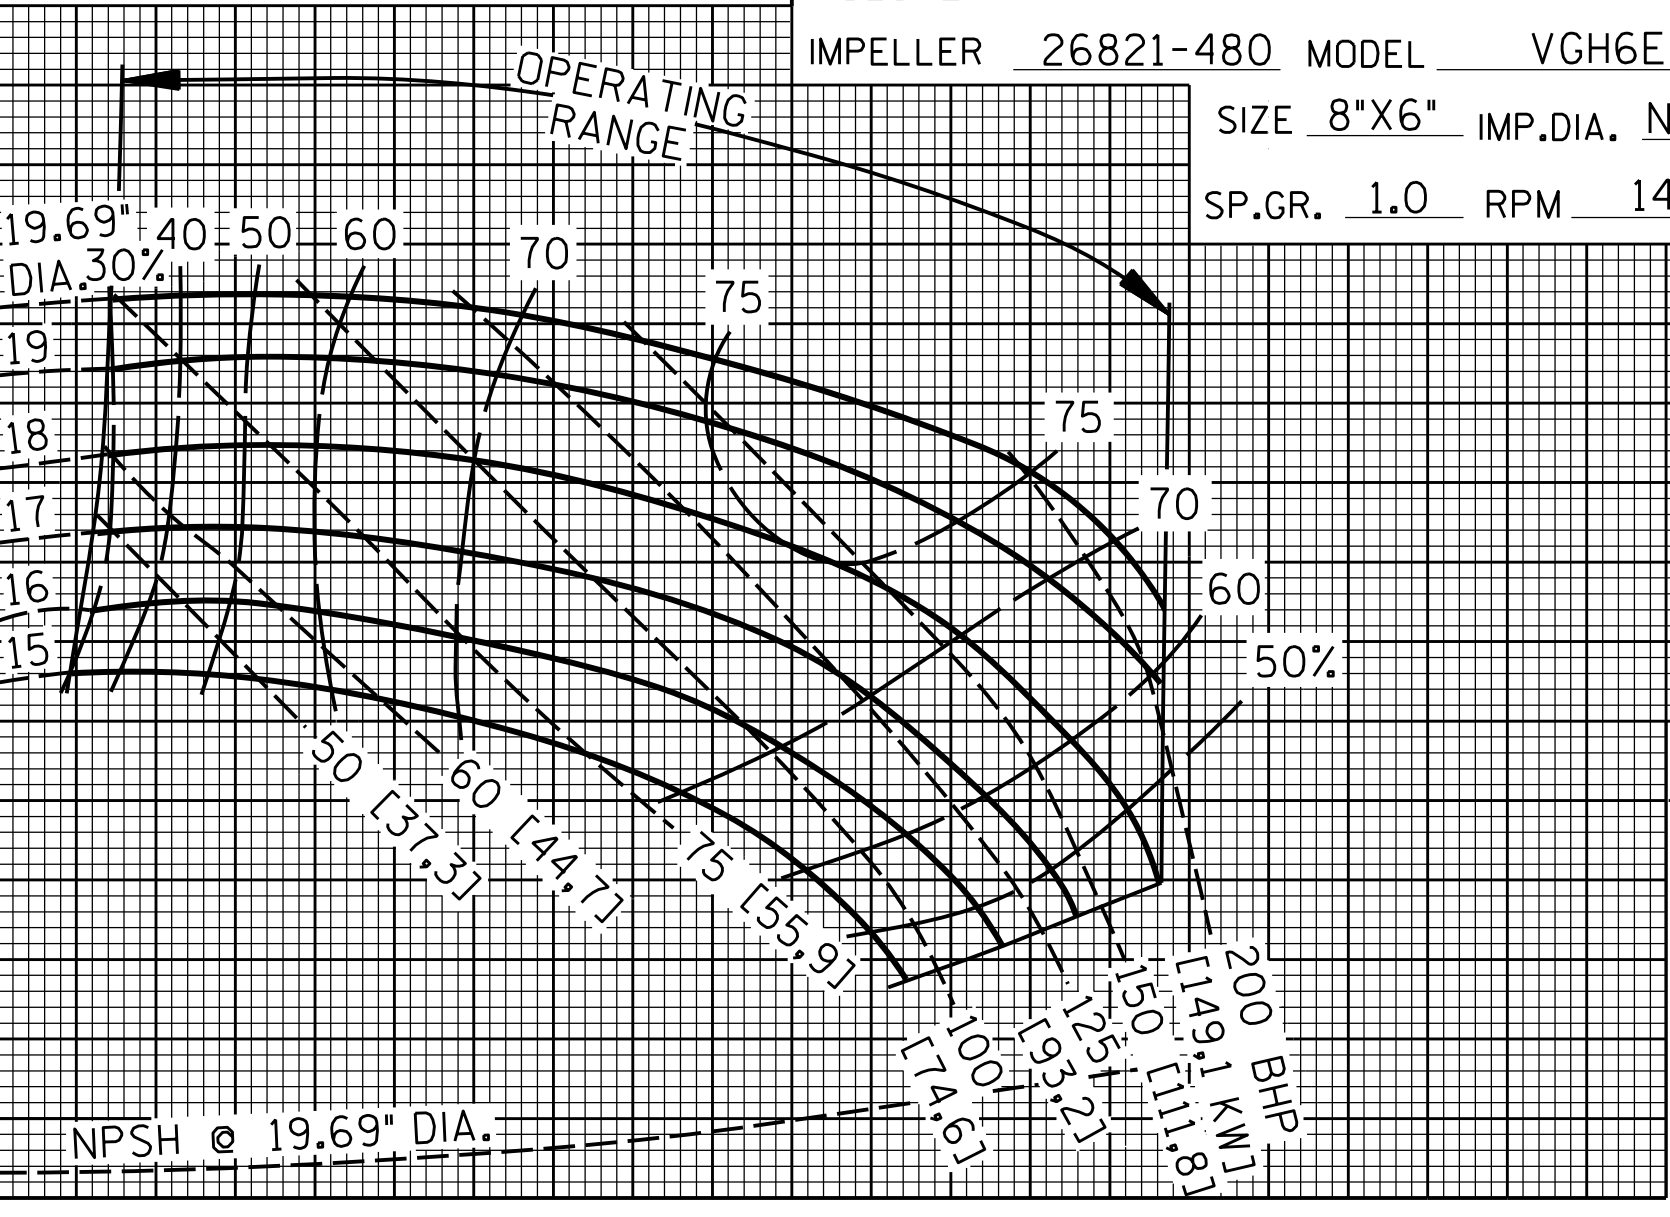

19.69" DIA. 30%

OPERATING RANGE

SIZE 8"X6" IMP.DIA. NOTED

SP.GR. 1.0 RPM 1450

NPSH
FT
M
30
20
10
0

U.S. GALLONS PER MINUTE X 100
0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40

LITRES PER SECOND X 10
0 2 4 6 8 10 12 14 16 18 20 22 24 26

CUBIC METRES PER HOUR X 100
0 1 2 3 4 5 6 7 8 9

