

TOTAL HEAD


50 HZ.

JACK SHAFT REQUIRED ON ALL V-BELT APPLICATIONS

PERFORMANCE CURVE

VOLUTE 26821-763 CURVE VGH6E-B-7
 IMPELLER 26821-480 MODEL VGH6E-B
 SIZE 8"X6" IMP.DIA. NOTED
 SP.GR. .80 RPM 1450

M PSI FT
 130 375
 110 350
 100 325
 90 300
 80 275
 70 250
 60 225
 50 200
 40 175
 30 150
 20 125
 10 100
 0 75
 0 50
 0 25
 0 0

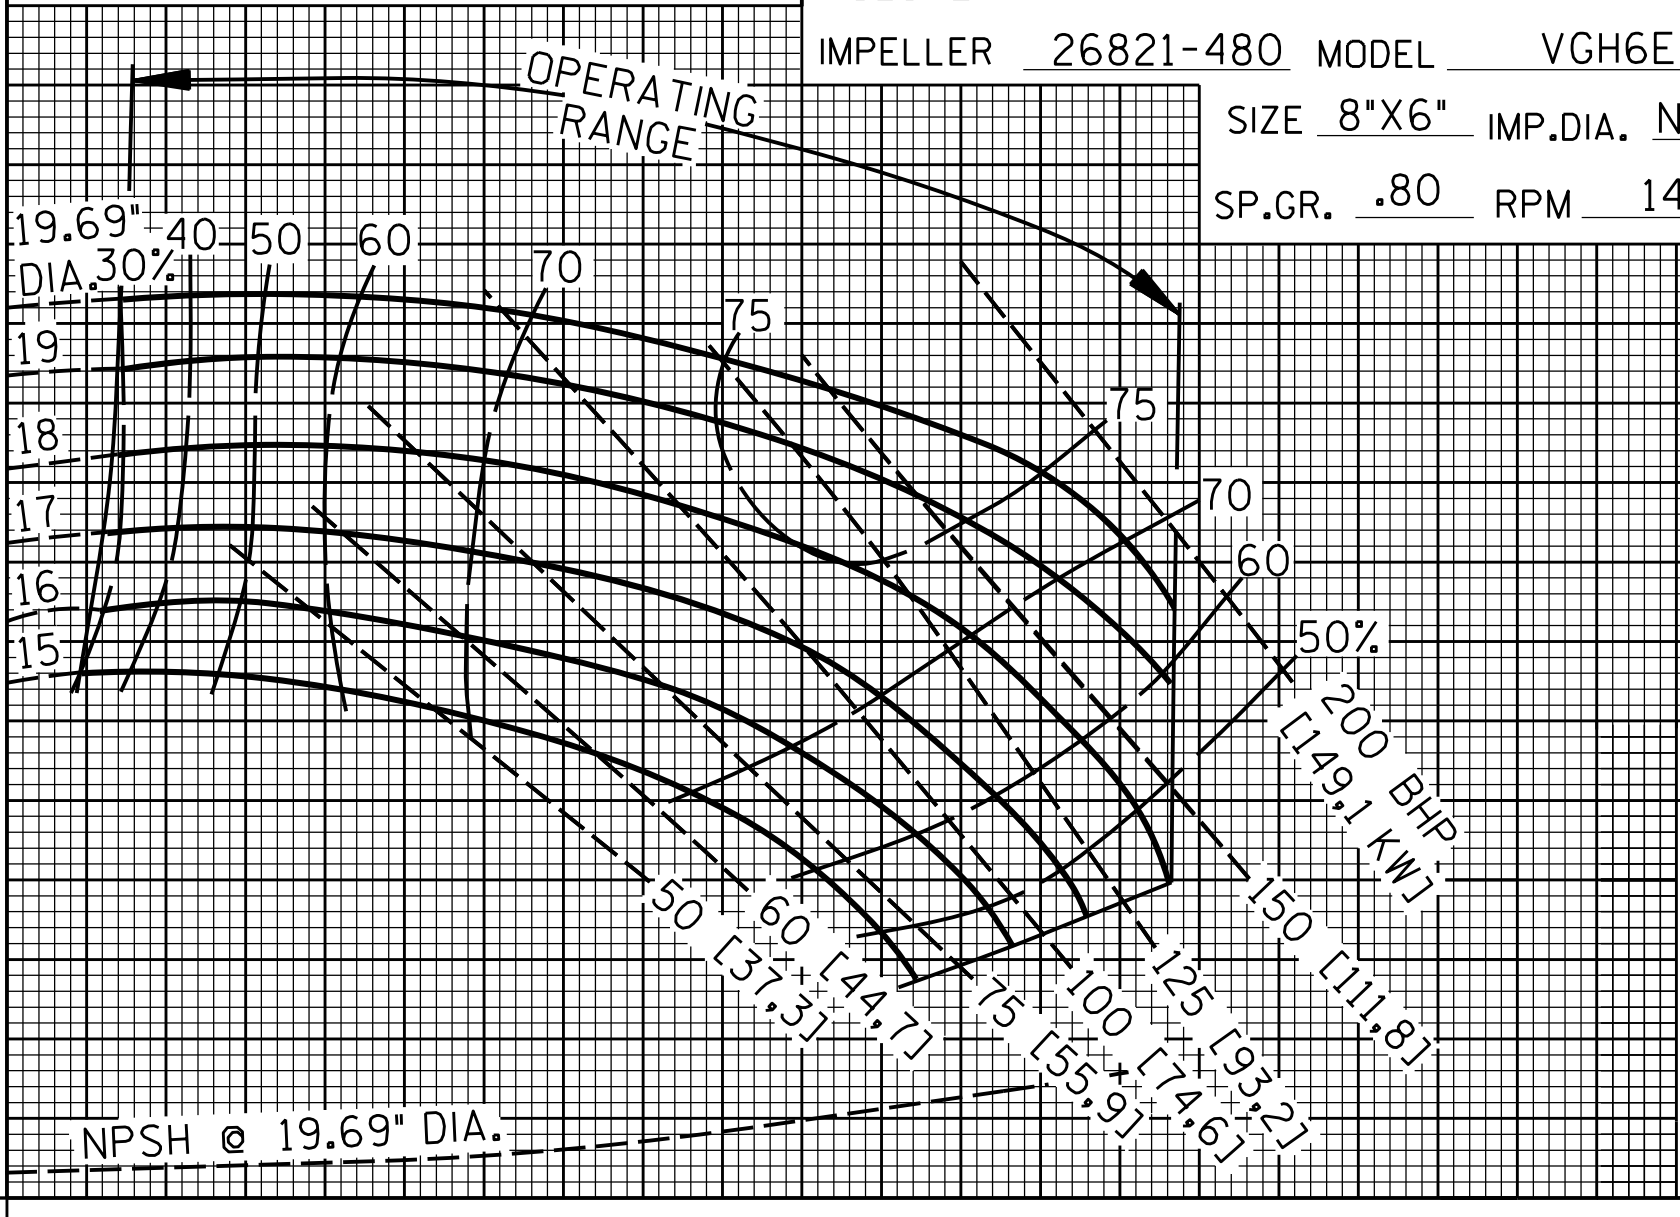

U.S. GALLONS PER MINUTE X 100
 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40

LITRES PER SECOND X 10
 0 2 4 6 8 10 12 14 16 18 20 22 24 26

CUBIC METRES PER HOUR X 100
 0 1 2 3 4 5 6 7 8 9

NPSH
 FT M
 30 10
 20 8
 10 6
 0 4
 0 2
 0 0

