



Part Number(s):

40630 (12" test leads)
40631 (18" test leads)
40632 (30" test leads)
Test leads w/boots 12, 18, & 30"

Packaging: Poly bagged & tagged
Includes:

1 pack contains 2 leads, one red, one black.
Our test leads are coated with a soft flexible vinyl cover. Our leads feature protector boots for added protection against accidental shock. Tips are of a jagged tooth design for maximum electrical contact and extra thick 18AWG UL wire.



Part Number(s):

41650 - 25' reel
41651 - 50' reel
41652 - 100' reel
41653 - 250' Box
GTO-15 cable - 7mm

Packaging: Plastic reels or dispensing box
Includes:

1 - Spool of GTO-15 cable
Our TUF-HIDE MINI SUPERFLEX®
GTO-15 cable is made of solid thermoplastic elastomer. Applications include: Transformer cable leads, ignition leads, and wire connections. UL and CSA listed.



Specifications

Wire Color: Grey	Voltage: 15 KVAC
Wire gauge: 14 AWG	O.D.: .270" + / - .002
Stranding: 19 x .014" bare copper	UL style: E - 135239
Insulation Thickness: .098"	CSA style: 74278
Temperature rating: 105 degrees centigrade (221 deg. F)	

Part Number: 40634

Test leads w/boots 20AMP

Packaging: Poly bagged & tagged

Includes:

1 - 8' test lead with red & black split.
Made of flexible rubber insulation this test cord features 20 amp. test clips, color coded vinyl insulators for shock protection, and jagged edged jaws for a positive connection.



Part Number(s):

41660 - 25' reel
41661 - 100' reel
41662 - 500' reel
41662 - 50' reel
Silicone cable - 7mm

Packaging: Plastic or wooden reels
Includes:

1 - Spool of silicone cable
An advanced silicone rubber insulated ignition wiring material. Used in ovens, furnaces, air conditioning equipment and other gas fired appliances. It has been found acceptable in ignitor devices tested by the American Gas Association Laboratories. UL listed.



Specifications

Wire Color: Red	O.D.: .274" + / - .006
Voltage: 25 KVDC / 10KVAC / 60HZ	UL file: E - 96824
Wire gauge: 18 AWG	UL style: 3257
Stranding: 16/30 nickel plated copper	
Insulation Thickness: .113"	
Temperature rating: 250 degrees centigrade (482 deg. F)	


Part Number(s):

PS250 (25' reel for re-packaging)
PS100 (100' reel for re-packaging)
Cable Reels - Empty

Packaging: Bulk

Includes:

1 - Reel of selected sizes above
We are always looking for ways to save our customers money! You can save big on buying our GTO & Silicone cable in 500' spools then re-packaging them yourself as needed onto our 25' & 100' spools listed above.

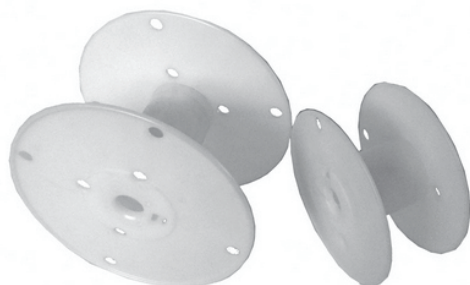

Empty Plastic spools are available

For 25' reel use P/N: PS250
For 100' reel use P/N: PS100