


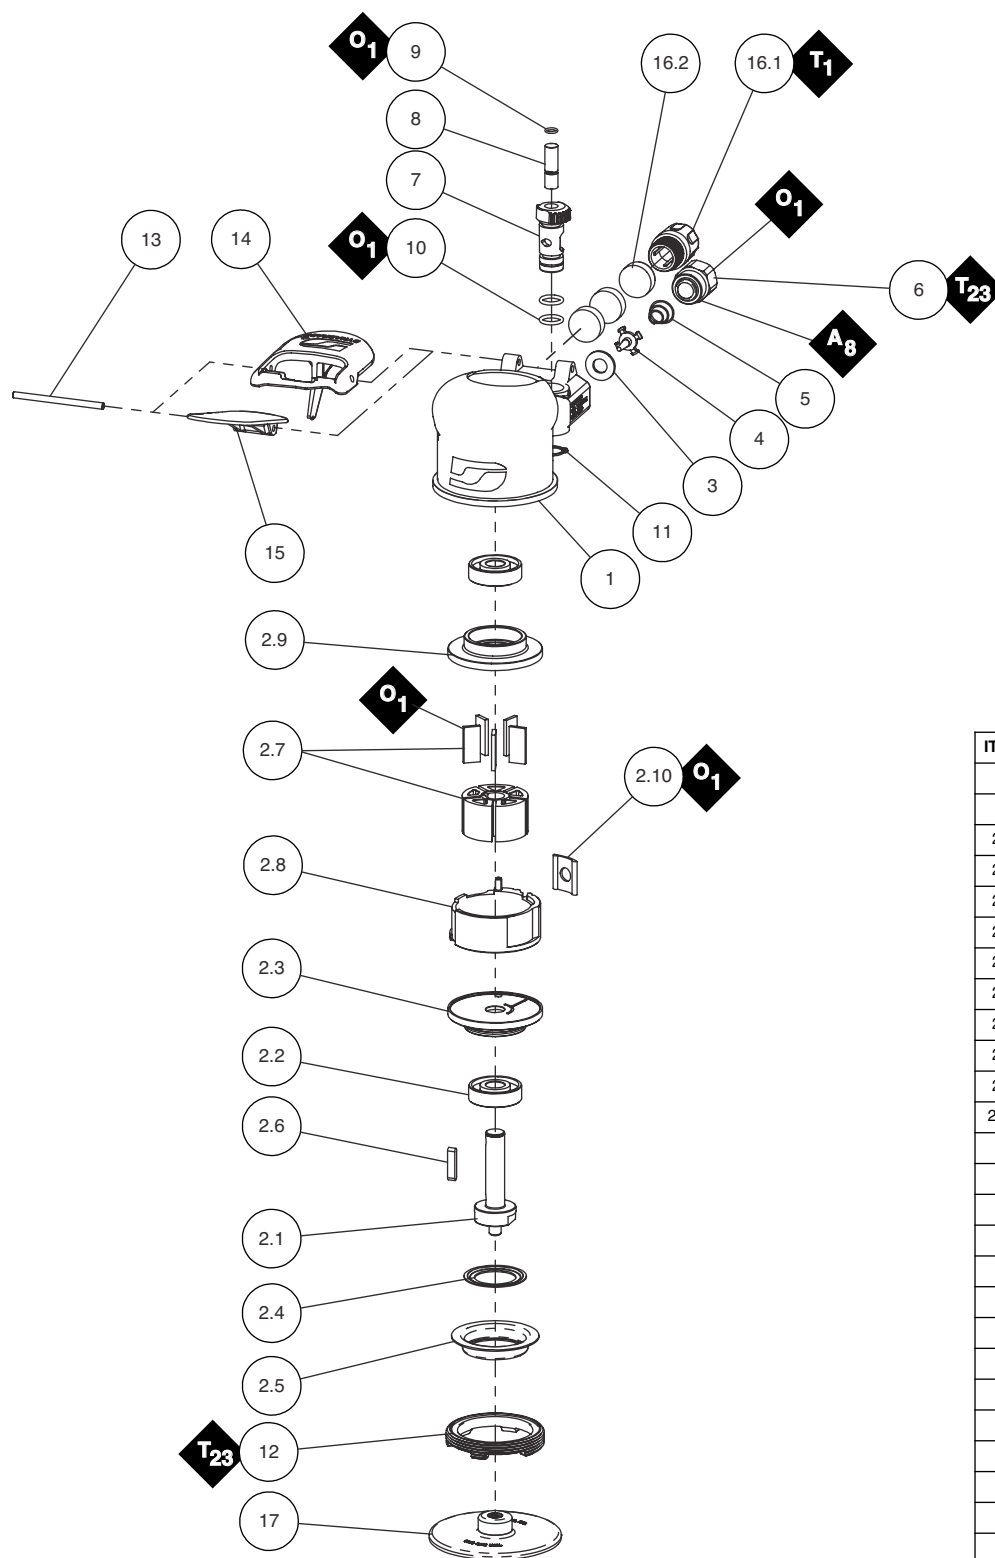

KEY	
O	Oil: O ₁ = Air Lube
A	Adhesive: A ₈ = Loctite #567
T	Torque: N•m x 8.85 = lb•in.
T_x	X = Torque Value (N•m)
Always follow adhesive manufacturers cleaning and priming recommendations.	

ITEM	P/N	DESCRIPTION	QTY.
1	69551	HOUSING	1
2	69542	MOTOR ASSEMBLY	1
2.1	59123	SHAFT	1
2.2	58368	BEARING	1
2.3	69361	FRONT BEARING PLATE	1
2.4	59083	FELT WASHER	1
2.5	59057	FRONT BEARING SEAL	1
2.6	56047	KEY	1
2.7	57113	ROTOR/VANE SET (5/PKG)	1
2.8	69350	CYLINDER	1
2.9	57891	REAR BEARING PLATE	1
2.10	69352	CYLINDER SEAL	1
3	01464	SEAL	1
4	58365	TIP VALVE	1
5	01468	SPRING	1
6	01494	INLET BUSHING	1
7	59075	SPEED REGULATOR	1
8	58363	VALVE STEM	1
9	98459	O-RING	1
10	01025	O-RING	2
11	95697	RETAINING RING	1
12	59058	LOCK RING	1
13	94590	PIN	1
14	57041	COMFORT PLATFORM	1
15	69360	THROTTLE LEVER	1
16	69272	MUFFLER ASSEMBLY	1
16.1	69359	MUFFLER BODY	1
16.2	56027	MUFFLER INSERT	3
17	50125	3" BACK-UP PAD	1
—	95751	OFFSET WRENCH - 19 MM	1