

Models:**50320 — 8,000 RPM, 5/8"-11 Spindle****50321 — 11,000 RPM, 5/8"-11 Spindle****50324 — 11,000 RPM, 3/8"-24 Spindle, 4" Roloc® Pad****50325 — 11,000 RPM, 4" Roloc® Sanding Kit**

4 1/2" - 5" Pistol Grip Disc Sander


Air Motor and Machine Parts

⚠ WARNING

Always operate, inspect and maintain this tool in accordance with the Safety Code for portable air tools (ANSI B186.1) and any other applicable safety codes and regulations. Please refer to Dynabrade's Warning/Safety Operating Instructions for more complete safety information.

Index Key

No.	Part #	Description
1	55029	Cover
2	55031	Felt Ring
3	55034	5/8"-11 Thread Adapter
4	55038	Adapter
5	01007	Bearing
6	01121	Shim (3/pkg.)
7	55026	Bearing Plate
8	50767	Pin (2)
9	01028	Cylinder
10	01010	Spacer
11	01185	Blade (4/pkg.)
12	55025	Rotor
13	01743	Bearing Plate
14	02649	Bearing
15	96255	Shim
16	96256	Shim (2)
17	96257	Shim
18	55032	Governor Cage
19	50399	Governor Weight (2)
20	50938	Governor Pin (2)
21	55054	Governor Valve
22	50470	Pin
23	50940	Spring-8,000 RPM
24	07169	Spring-11,000 RPM
25	95611	Shim Pack (6/pkg.)
26	50471	Spring Holder
27	53163	Handle Assembly
28	55023	Housing-8,000 RPM
29	55022	Housing-11,000 RPM
30	55047	Housing-Roloc®
31	96025	Pin
32	55024	Grip
33	50936	Pin
34	55035	Trigger
35	55043	Trigger Post
36	55052	Valve Stem
37	96069	Spring
38	55039	Bushing
39	50939	O-Ring
40	02027	O-Ring (2)
41	55051	Valve Stop (2)
42	55041	Valve
43	96147	O-Ring
44	55058	Trigger Assembly
45	57075	Cone Muffler
46	57066	Muffler Body
47	56028	Muffler Cap
48	56023	Inlet Bushing
49	50264	Disc Mount
50	50267	Fiber Plate
51	50268	Flange
52	50132	4" Dia. Roloc® Pad Hard Density
53	50131	4" Dia. Roloc® Pad Medium Density (Optional)

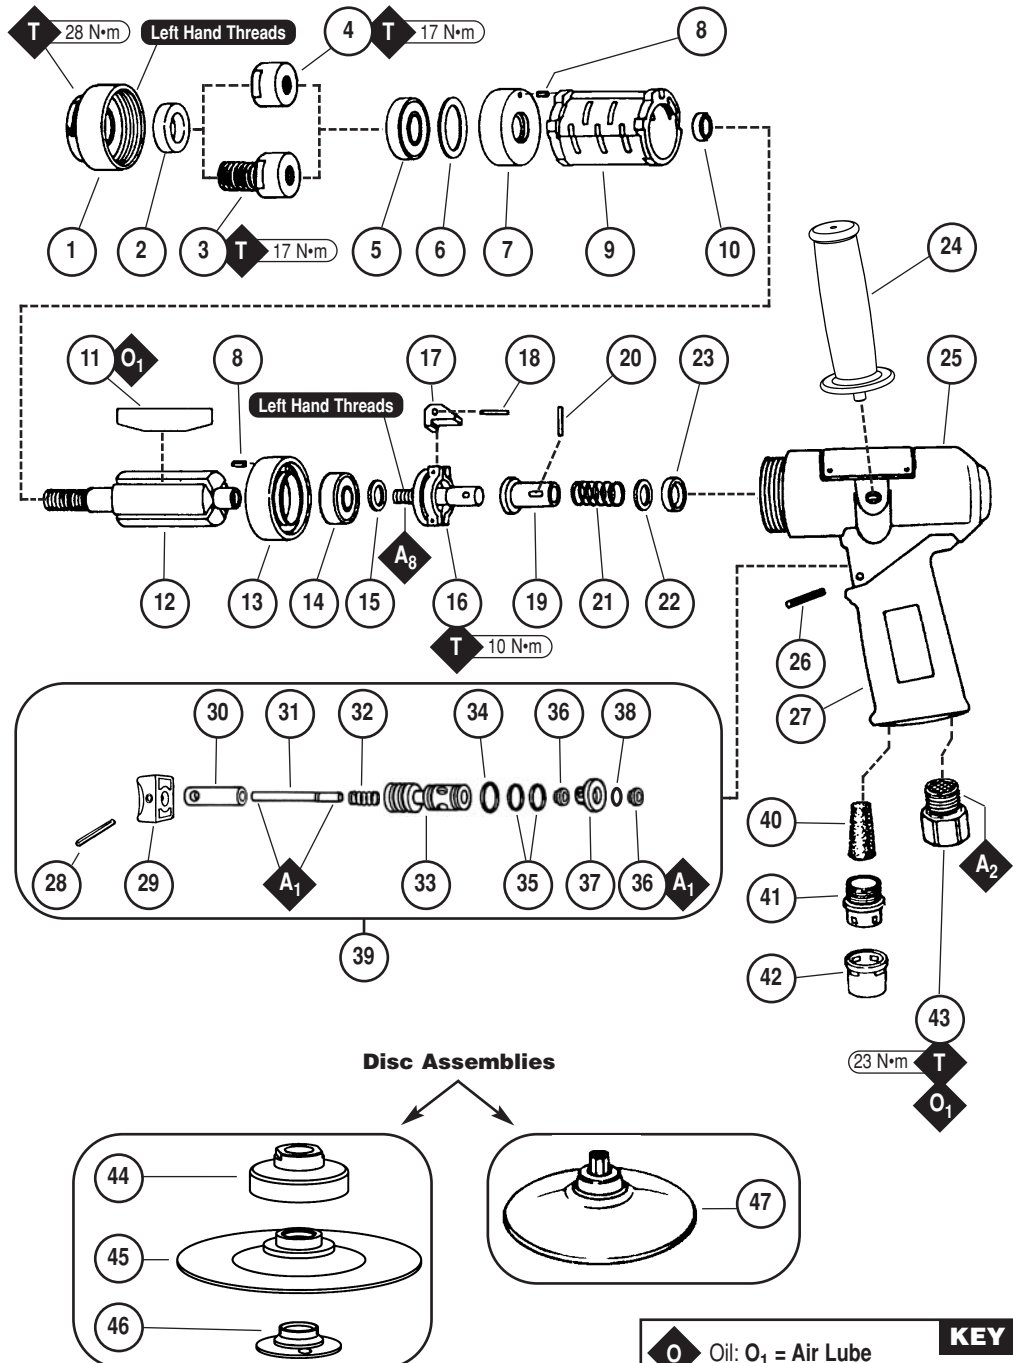

KEY	
O	Oil: O ₁ = Air Lube
A	Adhesive: A ₁ = Loctite #609 A ₂ = Loctite #271 A ₈ = Loctite #567
T	Torque: N·m x 8.85 = In. - lbs.

See inside for Important Operating, Maintenance and Safety Instructions.