



Interior Doors

Molded | Flush™



Interior Doors for Every Space

JELD-WEN offers a complete line of interior doors fitting your style and budget.

With one of the widest selections available, there's an interior door for every application. From simple, contemporary doors to highly ornate — you decide.

Find interior doors to inspire your spaces with JELD-WEN.

Interior Doors at a Glance



Molded

So many possibilities for transforming a room, with your choice of styles, colors and finishes.

PAGES 4 - 29



Flush

Keep it simple. Dependable, economical doors that combine strength and beauty.

PAGES 30 - 32



Molded Interior Door

ADD STYLE TO YOUR SPACES


With a wide variety of panel styles to choose from, there's a door for every aesthetic.

Explore all the options to find the ideal complement to your room.


Molded Door Options

STICKING PROFILES


Choose from traditional or contemporary sticking profiles.




CRAFTSMAN STICKING
JELD-WEN EXCLUSIVE



STEPPED STICKING




OVOLO STICKING




COVE & BEAD STICKING


AVAILABLE SIZES



14 WIDTHS BETWEEN 1'0" - 3'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1 3/8" OR 1 3/4"

CORE OPTIONS




**PROCORE®
SOLID CORE**
Combination wood/
MDF or all-wood frame



20-minute
fire rating

ProCORE
THE QUIET DOOR®




**SOLID MINERAL
CORE**

All-wood frame



60-minute*
fire rating

*Available in raised
panel designs only




**HOLLOW
CORE**

Wood/MDF frame

Blocking behind
panels for support

RAISED PANEL



COLONIST®

Smooth & Textured

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 12-13




IMPRESSION™ MIRROR

Opposite Side

Textured Only

Product Details pg. 31




COVENTRY®

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 14




ROCKPORT™

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 15




CAMBRIDGE™

Smooth

Ovolo Sticking

6'8", 7'0" & 8'0"

Product Details pg. 16




CARRARA®

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 17




AVALON®

Textured

Cove & Bead Sticking

6'8" & 7'0"

Product Details pg. 18



CAMDEN®

Textured

Cove & Bead Sticking

6'8" & 7'0"


PRINCETON™

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 19-20




CAIMAN®

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 21




CONTINENTAL™

Smooth

Ovolo Sticking

6'8", 7'0" & 8'0"

Product Details pg. 22




CORVADO®

Smooth

Cove & Bead Sticking

6'8", 7'0" & 8'0"

Product Details pg. 23




SANTA FE™

Smooth

Ovolo Sticking

6'8", 7'0" & 8'0"

Product Details pg. 24



CASHAL®

Smooth


Cove & Bead Sticking

6'8", 7'0" & 8'0"


Product Details pg. 25

Selection varies by market. See your JELD-WEN sales representative for details.


FLAT PANEL




CRAFTSMAN III™
Smooth
Craftsman Sticking
6'8" & 7'0"
Product Details pg. 26




MADISON®
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 27



CONMORE®
Smooth
Stepped Sticking
6'8" & 7'0"
Product Details pg. 28




MONROE®
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 29




BIRKDALE™
Smooth
Craftsman Sticking
6'8", 7'0" & 8'0"
Product Details pg. 30

For bifold product details, see pg. 32


COMMERCIAL WIDE STILE



COLONIST®
Smooth Wide Stile
Cove & Bead Sticking
6'8" & 7'0"
Product Details pg. 33



CAMBRIDGE™
Smooth Wide Stile
Ovolo Sticking
6'8" & 7'0"
Product Details pg. 33




CONTINENTAL™
Smooth Wide Stile
Ovolo Sticking
6'8" & 7'0"
Product Details pg. 33

Selection varies by market. See your JELD-WEN sales representative for details.

PRODUCT DETAIL


COLONIST® SMOOTH



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4"	6 3/4"	8 1/4"	CB	Smooth	●	N/A	●	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	●	N/A	●	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	●	N/A	●	N/A
2'4"	6'8" 7'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	●	N/A	●	N/A
2'6"	6'8" 7'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	●	N/A	●	N/A
2'8" 2'10"	6'8" 7'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	●	N/A	●	N/A
3'0"	6'8" 7'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	●	N/A	●	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	●	N/A	●	N/A
1'6" 1'8"	8'0"	Three	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	●	N/A	●	N/A
1'10" 2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	●	N/A	●	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	●	N/A	●	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	●	N/A	●	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	●	N/A	●	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Smooth	●	N/A	●	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



COLONIST® TEXTURED

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	11 7/8"	3 1/16" (1'6") 4 1/16" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
2'4"	6'8" 7'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
2'6"	6'8" 7'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
3'0"	6'8" 7'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Pine Grain	•	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Three	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4"	7"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
1'6" 1'8"	8'0"	Three	1 3/8" 1 3/4"	9 3/4"	4 1/8" (1'6") 5 1/8" (1'8")	N/A	4 1/4"	7"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 3/4"	8 1/4"	CB	Pine Grain	•	N/A	•	N/A


COVENTRY®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Four	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'4"	6'8" 7'0"	Four	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'6"	6'8" 7'0"	Four	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Four	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
3'0"	6'8" 7'0"	Four	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	4 1/4" (6'8") 6 1/4" (7'0")	6 13/16"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'10" 2'0" 2'2"	8'0"	Four	1 3/8" 1 3/4"	6"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'4"	8'0"	Four	1 3/8" 1 3/4"	8"	4 1/8"	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'6"	8'0"	Four	1 3/8" 1 3/4"	9"	4 1/8"	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	8'0"	Four	1 3/8" 1 3/4"	10"	4 1/8" (2'8") 5 1/8" (2'10")	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A
3'0"	8'0"	Four	1 3/8" 1 3/4"	12"	4 1/8"	3 3/4"	5 1/4"	6 5/8"	8 1/4"	CB	Smooth	•	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



ROCKPORT™

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'6" 1'8"	6'8" 7'0"	Five	1 3/8" 1 3/4"	10 1/4"	3 7/8" (1'6") 4 7/8" (1'8")	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	●	N/A	●	N/A
2'0"	6'8" 7'0"	Five	1 3/8" 1 3/4"	15 3/4"	4 1/8"	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	●	N/A	●	N/A
2'2" 2'4"	6'8" 7'0"	Five	1 3/8" 1 3/4"	19 3/4"	3 1/8" (2'2") 4 1/8" (2'4")	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	●	N/A	●	N/A
2'6"	6'8" 7'0"	Five	1 3/8" 1 3/4"	21 3/4"	4 1/8"	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	●	N/A	●	N/A
2'8"	6'8" 7'0"	Five	1 3/8" 1 3/4"	23 3/4"	4 1/8"	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	●	N/A	●	N/A
2'10" 3'0"	6'8" 7'0"	Five	1 3/8" 1 3/4"	25 3/4"	4 1/8" (2'10") 5 1/8" (3'0")	N/A	4 5/8" (6'8") 6 1/2" (7'0")	N/A	8 3/8" (6'8") 10 1/2" (7'0")	CB	Smooth	●	N/A	●	N/A
1'6" 1'8"	8'0"	Six	1 3/8" 1 3/4"	8 1/2"	4 3/4" (1'6") 5 3/4" (1'8")	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	●	N/A	●	N/A
2'0" 2'2"	8'0"	Six	1 3/8" 1 3/4"	14 1/2"	4 3/4" (2'0") 5 3/4" (2'2")	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	●	N/A	●	N/A
2'4"	8'0"	Six	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	●	N/A	●	N/A
2'6"	8'0"	Six	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	●	N/A	●	N/A
2'8" 2'10"	8'0"	Six	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	●	N/A	●	N/A
3'0"	8'0"	Six	1 3/8" 1 3/4"	25 3/4"	5 1/8"	N/A	4 5/8"	4 1/4"	10 1/8"	CB	Smooth	●	N/A	●	N/A


CAMBRIDGE™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	5 9/16"	3 7/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7 9/16"	3 7/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'3"	6'8" 7'0"	Two	1 3/8" 1 3/4"	8 9/16"	3 7/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 9/16"	3 7/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	11 9/16"	3 7/32" (1'6") 4 7/32" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	13 11/16"	4 5/32" (1'10") 5 5/32" (2'0")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	17 11/16"	4 5/32" (2'2") 5 5/32" (2'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
2'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21 11/16"	5 5/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23 3/4"	5 1/8" (2'10") 6 1/8" (3'0")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	7"	9 1/8" (6'8") 11 1/8" (7'0")	O	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	9 3/4"	4 1/8" (1'6") 5 1/8" (1'8")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
1'10" 2'0"	8'0"	Two	1 3/8" 1 3/4"	13 11/16"	4 5/32" (1'10") 5 5/32" (2'0")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
2'2" 2'4"	8'0"	Two	1 3/8" 1 3/4"	17 11/16"	4 5/32" (2'2") 5 5/32" (2'4")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
2'8"	8'0"	Two	1 3/8" 1 3/4"	21 11/16"	5 5/32"	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•
2'10" 3'0"	8'0"	Two	1 3/8" 1 3/4"	23 11/16"	5 5/32" (2'10") 6 5/32" (3'0")	N/A	4 7/16"	7"	8 15/16"	O	Smooth	•	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CARRARA®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6 11/16"	2 21/32"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7 1/2"	3 1/4" (1'2") 3 3/4" (1'3") 4 1/4" (1'4")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 1/2"	4 1/4" (1'6") 5 1/4" (1'8")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	14 15/16"	3 17/32" (1'0") 4 17/32" (2'0") 5 17/32" (2'2")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18 1/8"	4 15/16"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	Smooth 1 3/8" 1 3/4"	22 13/16"	4 19/32" (2'8") 5 19/32" (2'10")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25"	5 1/2"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	17 5/8"	5 3/16"	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	19 5/8"	5 3/16"	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	21 5/8"	5 3/16" (2'8") 6 3/16" (2'10")	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•
3'0"	8'0"	Two	1 3/8" 1 3/4"	23 5/8"	6 3/16"	N/A	5 1/4"	6 13/16"	8 1/4"	CB	Smooth	•	•	•	•


AVALON®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	6 3/16"	2 29/32"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	7 11/16"	3 5/32" (1'2") 3 21/32" (1'3") 4 5/32" (1'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	8 3/4"	4 5/8" (1'6") 5 5/8" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'10" 2'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'2" 2'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	19 5/8"	3 3/16" (2'2") 4 3/16" (2'4")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'6"	6'8" 7'0"	Three	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Three	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
3'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	27 5/8"	4 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	7 7/8" (6'8") 9 7/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAMDEN®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6 11/16"	2 21/32"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7 1/2"	3 1/4" (1'2") 3 3/4" (1'3") 4 1/4" (1'4")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 1/2"	4 1/4" (1'6") 5 1/4" (1'8")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	14 15/16"	3 17/32" (1'10") 4 17/32" (2'0") 5 17/32" (2'2")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18 1/8"	4 15/16"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	22 13/16"	4 19/32" (2'8") 5 19/32" (2'10")	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25"	5 1/2"	N/A	5 3/8" (6'8") 7 3/8" (7'0")	3 3/4"	8 1/8" (6'8") 10 1/8" (7'0")	CB	Oak Grain	•	N/A	•	N/A


PRINCETON™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6 11/16"	2 21/32" (1'0") 3 21/32" (1'2")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	8 9/16"	3 7/32" (1'3") 3 23/32" (1'4")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 1/2"	4 1/4" (1'6") 5 1/4" (1'8")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'10" 2'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15"	3 1/2" (1'10") 4 1/2" (2'0")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'2" 2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18 3/16"	3 29/32" (2'2") 4 29/32" (2'4")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 3/4"	5 1/8"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	22 7/8"	4 9/16" (2'8") 5 9/16" (2'10")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25 1/16"	5 15/32"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	3 11/16"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	•	N/A	•	N/A
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	9 1/2"	4 1/4" (1'6") 5 1/4" (1'8")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
1'10" 2'0"	8'0"	Two	1 3/8" 1 3/4"	14 15/16"	3 17/32" (1'10") 4 17/32" (2'0")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'2" 2'4"	8'0"	Two	1 3/8" 1 3/4"	18 1/8"	3 15/16" (2'2") 4 15/16" (2'4")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'6"	8'0"	Two	1 3/8" 1 3/4"	19 11/16"	5 5/32"	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'8"	8'0"	Two	1 3/8" 1 3/4"	22 13/16"	4 1/2"	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A
2'10" 3'0"	8'0"	Two	1 3/8" 1 3/4"	25"	4 1/2" (2'10") 5 1/2" (3'0")	N/A	5 1/4"	3 3/4"	8 1/4"	CB	Smooth	•	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CAIMAN®

Panel Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15 3/4"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	88 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	17 3/4"	5 1/8"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 3/4"	5 1/8"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21 3/4"	5 1/8" (2'8") 6 1/8" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23 3/4"	6 1/8"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	12"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 3/4"	3 1/8" (1'10") 4 1/8" (2'0") 5 1/8" (2'2")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	17 3/4"	5 1/8"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	19 3/4"	5 1/8"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	21 3/4"	5 1/8" (2'8") 6 1/8" (2'10")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
3'0"	8'0"	Two	1 3/8" 1 3/4"	23 3/4"	6 1/8"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•

CONTINENTAL™




Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	5 9/16"	3 7/32"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	8 9/16"	2 23/32" (1'2") 3 7/32" (1'3") 3 23/32" (1'4")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	10 9/16"	3 23/32" (1'6") 4 23/32" (1'8")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	14"	4" (1'10") 5" (2'0")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18"	4" (2'2") 5" (2'4")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	20"	5"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
2'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21"	5 1/2"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	24"	5" (2'10") 6" (3'0")	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	9 3/4"	4 1/8" (1'6") 5 1/8" (1'8")	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	14"	4" (1'10") 5" (2'0") 6" (2'2")	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	18"	5"	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	20"	5"	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•
2'8" 2'10" 3'0"	8'0"	Two	1 3/8" 1 3/4"	24"	5" (2'8") 5" (2'10") 6" (3'0")	N/A	5 1/4"	4 1/4"	11"	O	Smooth	•	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

CORVADO®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	●	N/A	●	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	●	N/A	●	N/A
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	●	N/A	●	N/A
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	●	N/A	●	N/A
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	●	N/A	●	N/A
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	4 3/16" (6'8") 6 3/16" (7'0")	6 5/8"	8 3/16" (6'8") 10 3/16" (7'0")	CB	Smooth	●	N/A	●	N/A
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	●	N/A	●	N/A
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	●	N/A	●	N/A
2'4"	8'0"	Two	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	●	N/A	●	N/A
2'6"	8'0"	Two	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	●	N/A	●	N/A
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	●	N/A	●	N/A
3'0"	8'0"	Two	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	5 3/16"	6 5/8"	8 3/16"	CB	Smooth	●	N/A	●	N/A


SANTA FE™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3" 1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	10"	4" (1'6") 5" (1'8")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
1'10" 2'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	14"	4" (1'10") 5" (2'0")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
2'2" 2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18"	4" (2'2") 5" (2'4")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21"	4 1/2"	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
2'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23"	4 1/2"	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
2'10" 3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	24"	5" (2'10") 6" (3'0")	N/A	4 3/8" (6'8") 6 3/8" (7'0")	7"	9 7/8" (6'8") 11 7/8" (7'0")	O	Smooth	•	•	•	•
1'0" 1'2" 1'3" 1'4"	8'0"	Two	1 3/8" 1 3/4"	7"	2 1/2" (1'0") 3 1/2" (1'2") 4" (1'3") 4 1/2" (1'4")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	10"	4" (1'6") 5" (1'8")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
1'10" 2'0"	8'0"	Two	1 3/8" 1 3/4"	14"	4" (1'10") 5" (2'0")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
2'2" 2'4"	8'0"	Two	1 3/8" 1 3/4"	18"	4" (2'2") 5" (2'4")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	21"	4 1/2"	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
2'8"	8'0"	Two	1 3/8" 1 3/4"	23"	4 1/2"	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•
2'10" 3'0"	8'0"	Two	1 3/8" 1 3/4"	24"	5" (2'10") 6" (3'0")	N/A	4 3/8"	7"	9 7/8"	O	Smooth	•	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



CASHAL®

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'6" 1'8"	6'8" 7'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	6 3/4"	8 1/4" (6'8") 10 1/4" (7'0")	CB	Smooth	•	•	•	•
1'6" 1'8"	8'0"	Two	1 3/8" 1 3/4"	12"	3" (1'6") 4" (1'8")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
1'10" 2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•
3'0"	8'0"	Two	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	6 3/4"	6 3/4"	8 1/4"	CB	Smooth	•	•	•	•

CRAFTSMAN III™




Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	4"	4"	N/A	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
1'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6"	4"	N/A	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
1'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	8 1/4"	3 7/8"	N/A	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
1'6" 1'8" 1'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	10"	4" (1'6") 5" (1'8") 6" (1'10")	N/A	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
2'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	15"	4 1/2"	4 1/2"	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
2'2" 2'4"	6'8" 7'0"	Three	1 3/8" 1 3/4"	17"	4 1/2" (2'2") 5 1/2" (2'4")	4 1/2"	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
2'6" 2'8"	6'8" 7'0"	Three	1 3/8" 1 3/4"	21"	4 1/2" (2'6") 5 1/2" (2'8")	4 1/2"	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•
2'10" 3'0"	6'8" 7'0"	Three	1 3/8" 1 3/4"	25"	4 1/2" (2'10") 5 1/2" (3'0")	4 1/2"	4 5/8" (6'8") 6 5/8" (7'0")	N/A	8 15/16" (6'8") 10 15/16" (7'0")	Flat	C	Smooth	•	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

MADISON®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0" 1'2" 1'3"	6'8" 7'0"	One	1 3/8" 1 3/4"	5 3/8"	3 5/16" (1'0") 4 5/16" (1'2") 4 13/16" (1'3")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
1'4" 1'6"	6'8" 7'0"	One	1 3/8" 1 3/4"	7 13/16"	4 3/32" (1'4") 5 3/32" (1'6")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
1'8" 1'10"	6'8" 7'0"	One	1 3/8" 1 3/4"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
2'0" 2'2"	6'8" 7'0"	One	1 3/8" 1 3/4"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
2'4"	6'8" 7'0"	One	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
2'6"	6'8" 7'0"	One	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	One	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
3'0"	6'8" 7'0"	One	1 3/8" 1 3/4"	26 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	C	Smooth	•	•	•	•
1'4" 1'6"	8'0"	One	1 3/8" 1 3/4"	7 13/16"	4 3/32" (1'4") 5 3/32" (1'6")	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
1'8" 1'10"	8'0"	One	1 3/8" 1 3/4"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
2'0" 2'2"	8'0"	One	1 3/8" 1 3/4"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
2'4"	8'0"	One	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
2'6"	8'0"	One	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
2'8" 2'10"	8'0"	One	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•
3'0"	8'0"	One	1 3/8" 1 3/4"	26 1/2"	4 3/4"	N/A	4 3/4"	N/A	10 1/4"	Flat	C	Smooth	•	•	•	•

CONMORE®




Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'6" 1'8"	6'8" 7'0"	Five	1 3/8" 1 3/4"	9 5/8"	4 3/16" (1'6") 5 3/16" (1'8")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	●	N/A	●	N/A
1'10" 2'0" 2'2"	6'8" 7'0"	Five	1 3/8" 1 3/4"	15 5/8"	3 3/16" (1'10") 4 3/16" (2'0") 5 3/16" (2'2")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	●	N/A	●	N/A
2'4"	6'8" 7'0"	Five	1 3/8" 1 3/4"	19 5/8"	4 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	●	N/A	●	N/A
2'6"	6'8" 7'0"	Five	1 3/8" 1 3/4"	21 5/8"	4 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	●	N/A	●	N/A
2'8" 2'10"	6'8" 7'0"	Five	1 3/8" 1 3/4"	23 5/8"	4 3/16" (2'8") 5 3/16" (2'10")	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	●	N/A	●	N/A
3'0"	6'8" 7'0"	Five	1 3/8" 1 3/4"	25 5/8"	5 3/16"	N/A	4 1/4" (6'8") 6 1/4" (7'0")	N/A	8 1/4" (6'8") 10 1/4" (7'0")	Flat	S	Smooth	●	N/A	●	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.

MONROE®



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	6"	3"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'2" 1'3"	6'8" 7'0"	Two	1 3/8" 1 3/4"	7 1/2"	3 1/2" (1'2") 3 3/4" (1'3")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'4" 1'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	9 1/4"	3 3/8" (1'4") 4 3/8" (1'6")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'8" 1'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'0" 2'2"	6'8" 7'0"	Two	1 3/8" 1 3/4"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Two	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Two	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Two	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Two	1 3/8" 1 3/4"	26 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	7"	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'4" 1'6"	8'0"	Two	1 3/8" 1 3/4"	9 1/4"	3 3/8" (1'4") 4 3/8" (1'6")	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
1'8" 1'10"	8'0"	Two	1 3/8" 1 3/4"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
2'0" 2'2"	8'0"	Two	1 3/8" 1 3/4"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
2'4"	8'0"	Two	1 3/8" 1 3/4"	18 1/2"	4 3/4"	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
2'6"	8'0"	Two	1 3/8" 1 3/4"	20 1/2"	4 3/4"	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Two	1 3/8" 1 3/4"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•
3'0"	8'0"	Two	1 3/8" 1 3/4"	26 1/2"	4 3/4"	N/A	4 3/4"	7"	11 1/8"	C	Smooth	•	•	•	•


BIRKDALE™



Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
1'0"	6'8" 7'0"	Three	1 3/8"	6"	3"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'2" 1'3"	6'8" 7'0"	Three	1 3/8"	7 1/2"	3 1/2" (1'2") 3 3/4" (1'3")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'4" 1'6"	6'8" 7'0"	Three	1 3/8"	9 1/4"	3 3/8" (1'4") 4 3/8" (1'6")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'8" 1'10"	6'8" 7'0"	Three	1 3/8"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'0" 2'2"	6'8" 7'0"	Three	1 3/8"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'4"	6'8" 7'0"	Three	1 3/8"	18 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'6"	6'8" 7'0"	Three	1 3/8"	20 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
2'8" 2'10"	6'8" 7'0"	Three	1 3/8"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
3'0"	6'8" 7'0"	Three	1 3/8"	26 1/2"	4 3/4"	N/A	4 3/4" (6'8") 6 3/4" (7'0")	N/A	11 1/8" (6'8") 13 1/8" (7'0")	C	Smooth	•	•	•	•
1'0"	8'0"	Three	1 3/8"	6"	3"	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
1'2" 1'3"	8'0"	Three	1 3/8"	7 1/2"	3 1/4" (1'2") 3 3/4" (1'3")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
1'4" 1'6"	8'0"	Three	1 3/8"	9 1/4"	3 3/8" (1'4") 4 3/8" (1'6")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
1'8" 1'10"	8'0"	Three	1 3/8"	11 1/2"	4 1/4" (1'8") 5 1/4" (1'10")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
2'0" 2'2"	8'0"	Three	1 3/8"	15 1/2"	4 1/4" (2'0") 5 1/4" (2'2")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
2'4"	8'0"	Three	1 3/8"	18 1/2"	4 3/4"	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
2'6"	8'0"	Three	1 3/8"	20 1/2"	4 3/4"	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
2'8" 2'10"	8'0"	Three	1 3/8"	22 1/2"	4 3/4" (2'8") 5 3/4" (2'10")	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•
3'0"	8'0"	Three	1 3/8"	26 1/2"	4 3/4"	N/A	4 3/4"	N/A	11 1/8"	C	Smooth	•	•	•	•

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO


*Assuming standard bore machining (2 1/8" diameter bore), outer stile measurements listed above must be no less than 3 11/16" in order to accommodate a 2 3/8" backset on the lock hole. For 2 3/4" backsets, outer stile measurements must be no less than 4 1/16". If lock bore machining is less than the outer stile measurements listed above, all lock bore drilling must be done within the lock rail for best appearance and performance. Outer stile dimension may vary 1/4" from the measurements listed above.



IMPRESSION™ MIRROR DOOR

Width	Height	No. of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Panel Type	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
2'0"	6'8"	One	1 3/8"	15 3/8"	4 1/4"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A
2'4"	6'8"	One	1 3/8"	19 3/8"	4 5/16"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A
2'6"	6'8"	One	1 3/8"	21 3/8"	4 5/16"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A
2'8"	6'8"	One	1 3/8"	23 3/8"	4 5/16"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A
3'0"	6'8"	One	1 3/8"	27 3/8"	4 5/16"	N/A	4 1/4"	N/A	9 3/8"	Flat	CB	Pine Grain	•	N/A	•	N/A

REVERSE IS COLONIST TEXTURED 6-PANEL ONLY



BIFOLDS

Door Design	Heights*	No. of Panels	Thickness	Widths* 2 doors or 1 unit	Widths* 4 doors or 2 units
Avalon®	6'7"; 6'11"	6	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Caiman®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Cambridge™	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Camden®	6'7"; 6'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Carrara®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Cashal®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Colonist® Smooth	6'7"; 6'11"; 7'11"	6	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Colonist® Textured	6'7"; 6'11"; 7'11"	6	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Conmore®	6'7"; 6'11"	10	1 3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Continental™	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Corvado®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Coventry®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Craftsman III™	6'7"; 6'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Madison®	6'7"; 6'11"; 7'11"	2	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Monroe®	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Princeton™	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Rockport™	6'7"; 6'11"; 7'11"	10	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Santa Fe™	6'7"; 6'11"; 7'11"	4	1 3/8"	1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"
Birkdale™	6'7"; 6'11"; 7'11"	6	1 3/8"	1'6"; 1'8"; 1'10"; 2'0"; 2'2"; 2'4"; 2'6"; 2'8"; 2'10"; 3'0"	3'0"; 3'4"; 3'8"; 4'0"; 4'4"; 4'8"; 5'0"; 5'4"; 5'8"; 6'0"

*All panel, inner stile, top rail and lock rail measurements will match those listed above. Outer stile measurements may vary 1/4" (depending on profit).


All bottom rail measurements will be 1" shorter than the measurements listed above in order to accommodate track and hardware.

Bifolds are available in alternate heights and widths. Please contact JELD-WEN customer service for specifications and availability of alternate sizes.

All bifolds are boxed (or endcapped) with track and hardware included.

COMMERCIAL WIDE STILE

CAMBRIDGE™, COLONIST® AND CONTINENTAL™

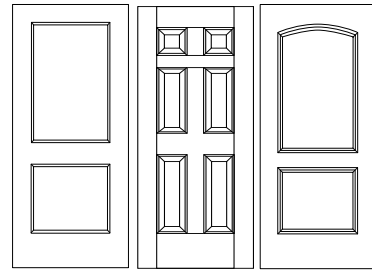

Width	Height	# of Panels	Thickness	Panel Width	Outer Stiles*	Center Mullion	Top Rail	Lock Rail	Bottom Rail	Sticking Profile	Surface	GREEN GUARD	Statement™	Paint	Woodview™
3'0" Cambridge™ Beaded	6'8" 7'0"	Two	1 3/8" 1 3/4"	23"	6 1/2"	N/A	4 7/16" (6'8") 6" 1/4" (7'0")	6 3/8"	11 11/16" (6'8") 13 7/8" (7'0")	O	Smooth	•	N/A	•	N/A
3'0" Colonist®	6'8" 7'0"	Six	1 3/8" 1 3/4"	9 5/8"	6 1/2"	3 3/4"	5 7/8" (6'8") 7 7/8" (7'0")	6 3/4"	10 5/8" (6'8") 12 5/8" (7'0")	CB	Smooth	•	N/A	•	N/A
3'0" Continental™	6'8" 7'0"	Two	1 3/8" 1 3/4"	24"	6"	N/A	5 1/4" (6'8") 7 1/4" (7'0")	4 3/16"	10 13/16" (6'8") 12 13/16" (7'0")	O	Smooth	•	N/A	•	N/A

STICKING PROFILE: CB = COVE AND BEAD, C = CRAFTSMAN, S = STEPPED, O = OVOLO



Flush Interior Door

SIMPLICITY AND RELIABILITY MEET

Our flush interior doors are offered in a variety of colors and woodgrains.


They are built to endure everyday life, so you can be confident in their

durability. All flush interior doors are available with ProCore The Quiet


Door® construction, reducing sound transmission.

Flush Door Options


AVAILABLE SIZES



16 WIDTHS BETWEEN 1'0" - 4'0"




HEIGHTS OF 6'8", 7'0" OR 8'0"



THICKNESSES OF 1 3/8" OR 1 3/4"

CORE OPTIONS



PROCORE® SOLID CORE

Wood or MDF frame



20-minute fire rating

PROCORE
THE QUIET DOOR®




SOLID MINERAL CORE

Mineral composite frame




90-minute fire rating



HOLLOW CORE

Combination wood/MDF frame

Corrugated honeycomb cell core



Sliced Red Oak
Slab and Bifold



Rotary-Cut Birch
Slab



Lauan (Tropical Hardwood)
Slab and Bifold

Doors are for interior applications only.





DYKE INDUSTRIES INC.