

A-Cylinder

MINI IP66

Project:

Type:

Qty:



Designed for architectural precision and outdoor durability, the MINI IP66 Series offers a versatile range of cylinder luminaires in both round and square forms. Available in multiple sizes and wattages, it provides controlled downward illumination ideal for façades, pathways, and building entrances.

Constructed from die-cast aluminum with a corrosion-resistant powder coating, MINI IP66 ensures consistent performance under all weather conditions. Its minimalist geometry and refined detailing make it a perfect fit for contemporary architectural environments.

Key Features



IP66 protection for outdoor use



Available in round and square forms



Multiple sizes and wattages



Precision-engineered downward light



High-grade die-cast aluminum housing



Corrosion-resistant architectural finish



Suitable for façades, walls, and public spaces

Order Code

ORDER CODE EXAMPLE: ACYLM66-SQ-60C-30K-24D-CG-24V-ELV-WH

SERIES	FRONT COVER	SIZE/WATTAGE	CCT	BEAM ANGLE	OPTICAL ACCESSORIES
A-CYL-M66	RD Round	50C 1.97" 5W(408lm)	27K 2700K	15D 15degree	CG Clear Glass
	SQ Square	60C 2.36" 10W(1180lm)	30K 3000K	24D 24degree	FG Frosted Glass
			35K 3500K	36D 36degree Available only in 1.97"	HC Honeycomb
			40K 4000K	38D 38degree Available only in 2.36"	DF Diffuser
			TW Tunable White 2700K-6500K	60D 60degree	
			WD Warm Dim 3000K-1800K		
			RGB N/A for 32R RGBW ___specify W N/A for 32R		

INPUT VOLTAGE	DIMMING	FINISH
12V 12V DC	NON Non Dim	DG Dark Gray
24V 24V DC	ELV Triac/ELV	WH White
120V 120V-277V	D10 1-10V	CSF Custom
	DALI DALI	
	DMX DMX512	

A-Cylinder

MINI IP66


Project:

Type:


Qty:

DIMENSIONS

Round

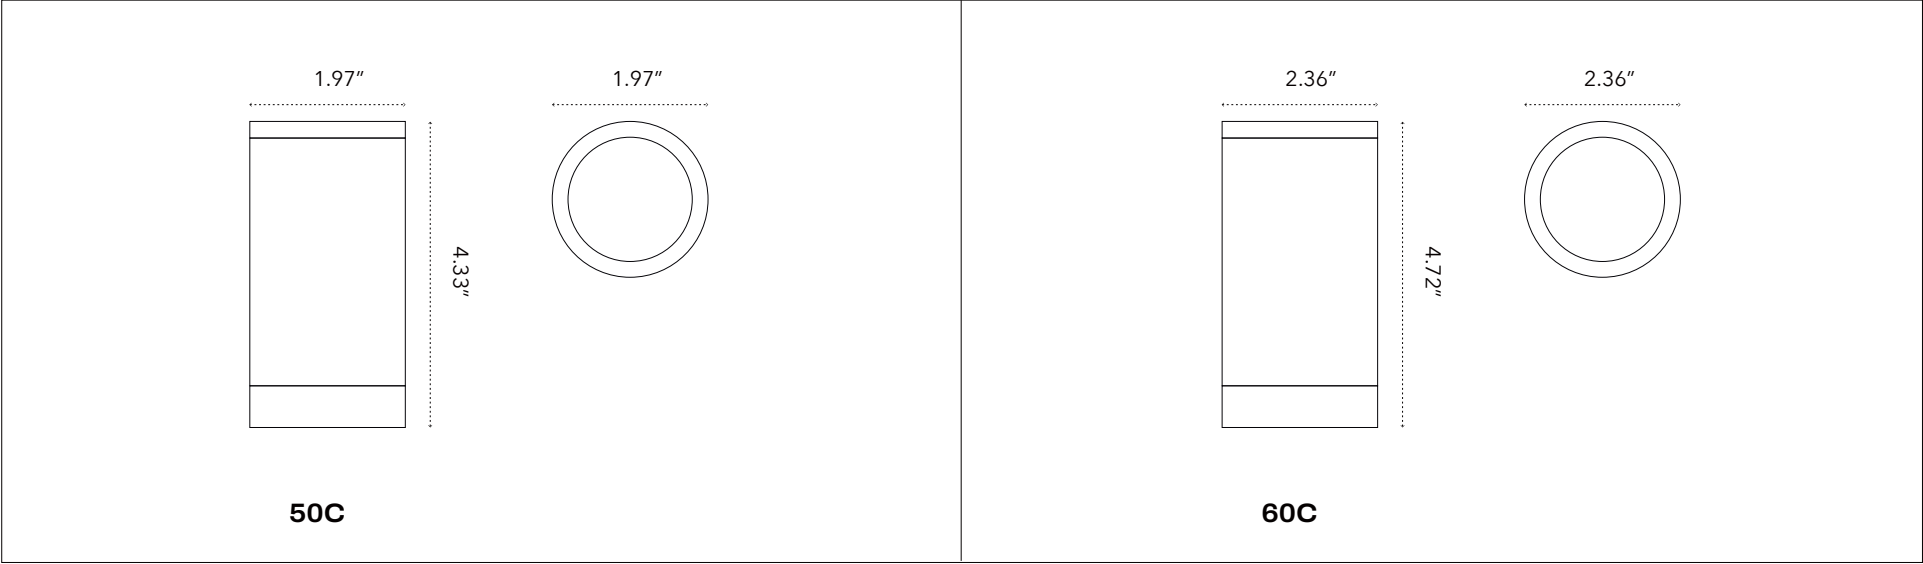

Square

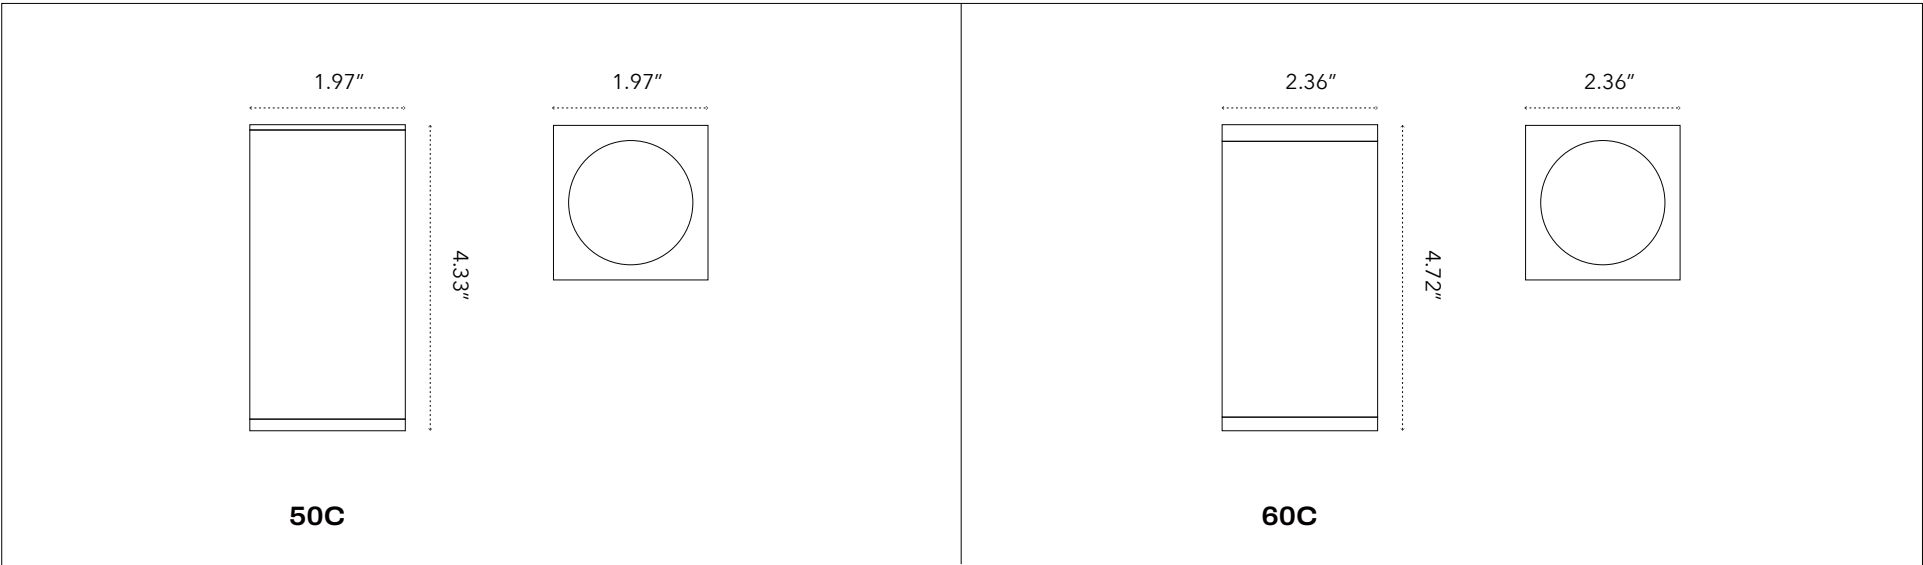

Project:





Type:

Qty:




MOUNTING OPTIONS

JBA -JBOX ADAPTER?


Direct ceiling mount with integral mounting plate and driver

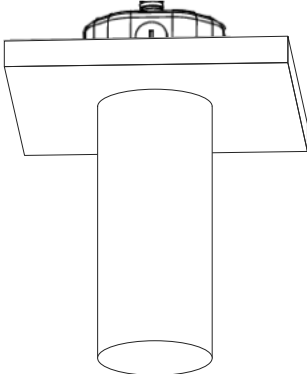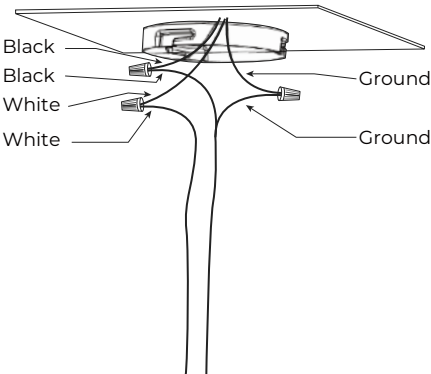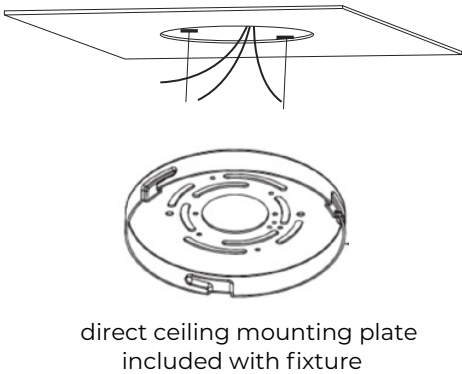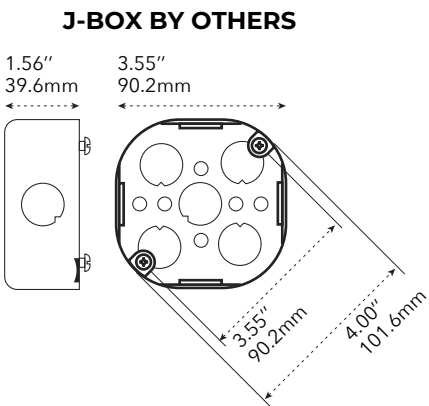


PENDANT MOUNT

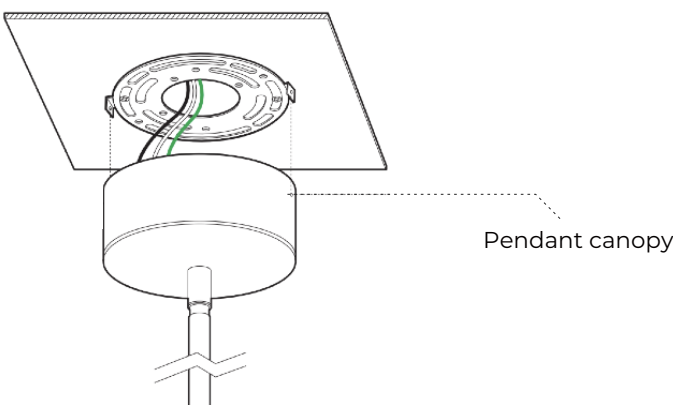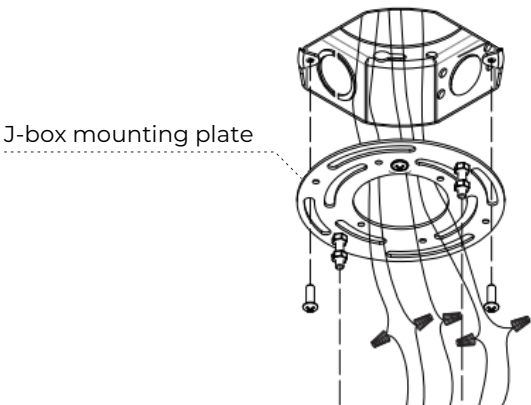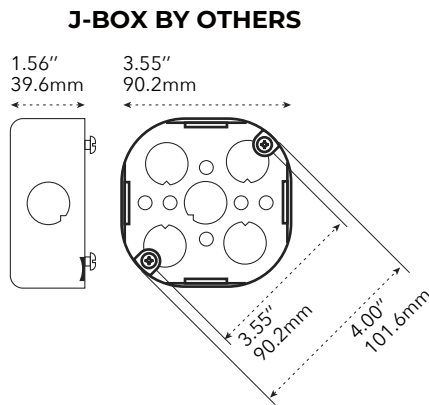


(JBA) JBOX ADAPTER INSTALLATION DIAGRAM

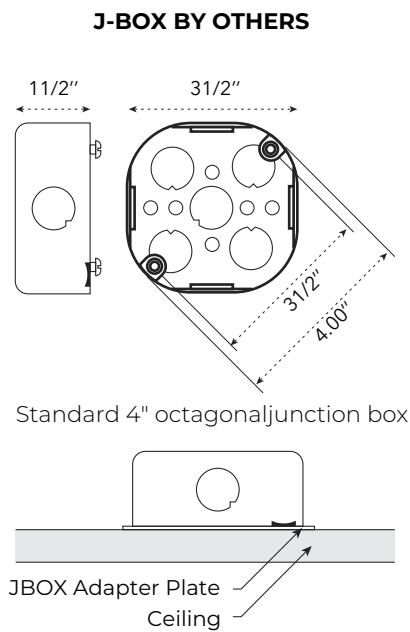

Direct Mount

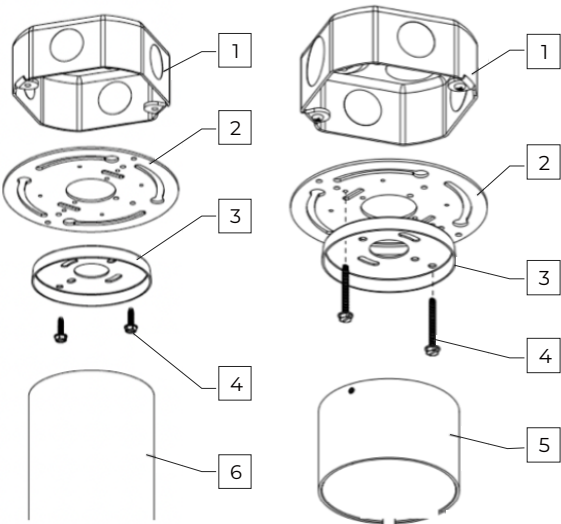

Suspended

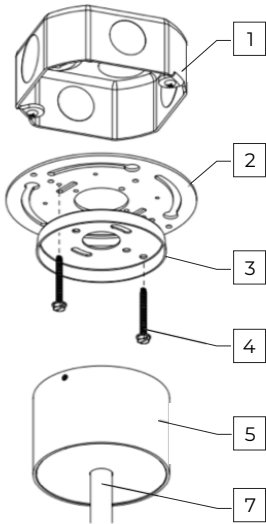


Items list

- 1 Standard j-box (by others)
- 2 JBOX Adapter Plate
- 3 Lid/Canopy Cover
- 4 Screws
- 5 Surface or Suspended Canopy
- 6 Cylinder body
- 7 Stem or Aircraft Cable/Power





MINI IP66

Qty:

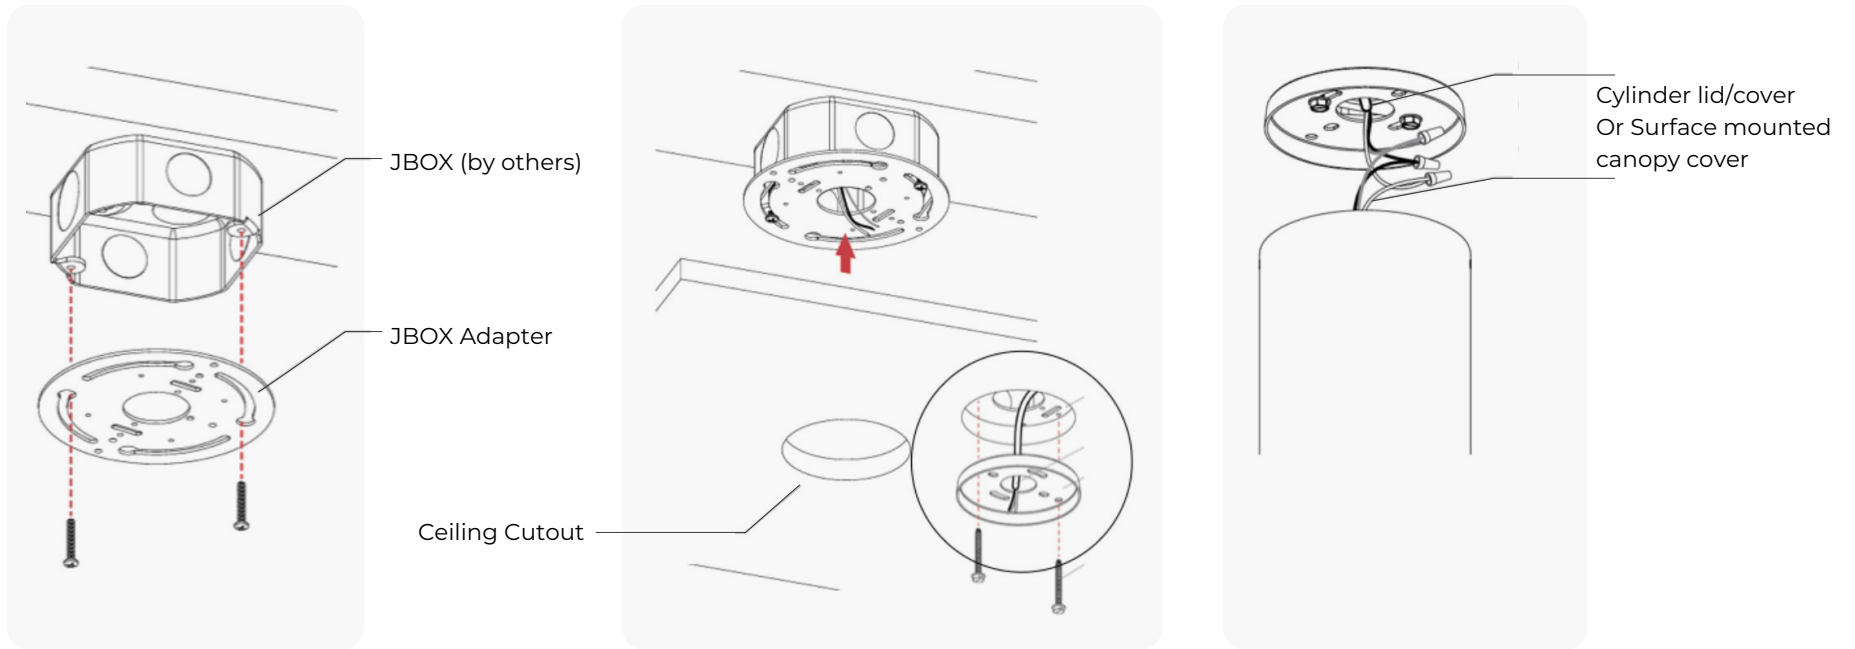

To be used with cylinders or canopies that are smaller than the jbox opening

INTEGRAL DRIVER

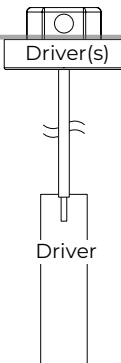Order code	FLR Flat round canopy, 4" octagonal junction box	CDR Conduit feed, round canopy	DMNC Direct mount, new construction	DR Deep round canopy
Canopy type				

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.


✉ info@binacompany.com
☎ 305.735.3114
🌐 www.binacompany.com



MINI IP66

Project:	Type:	Qty:
----------	-------	------

CONNECTION DIAGRAM

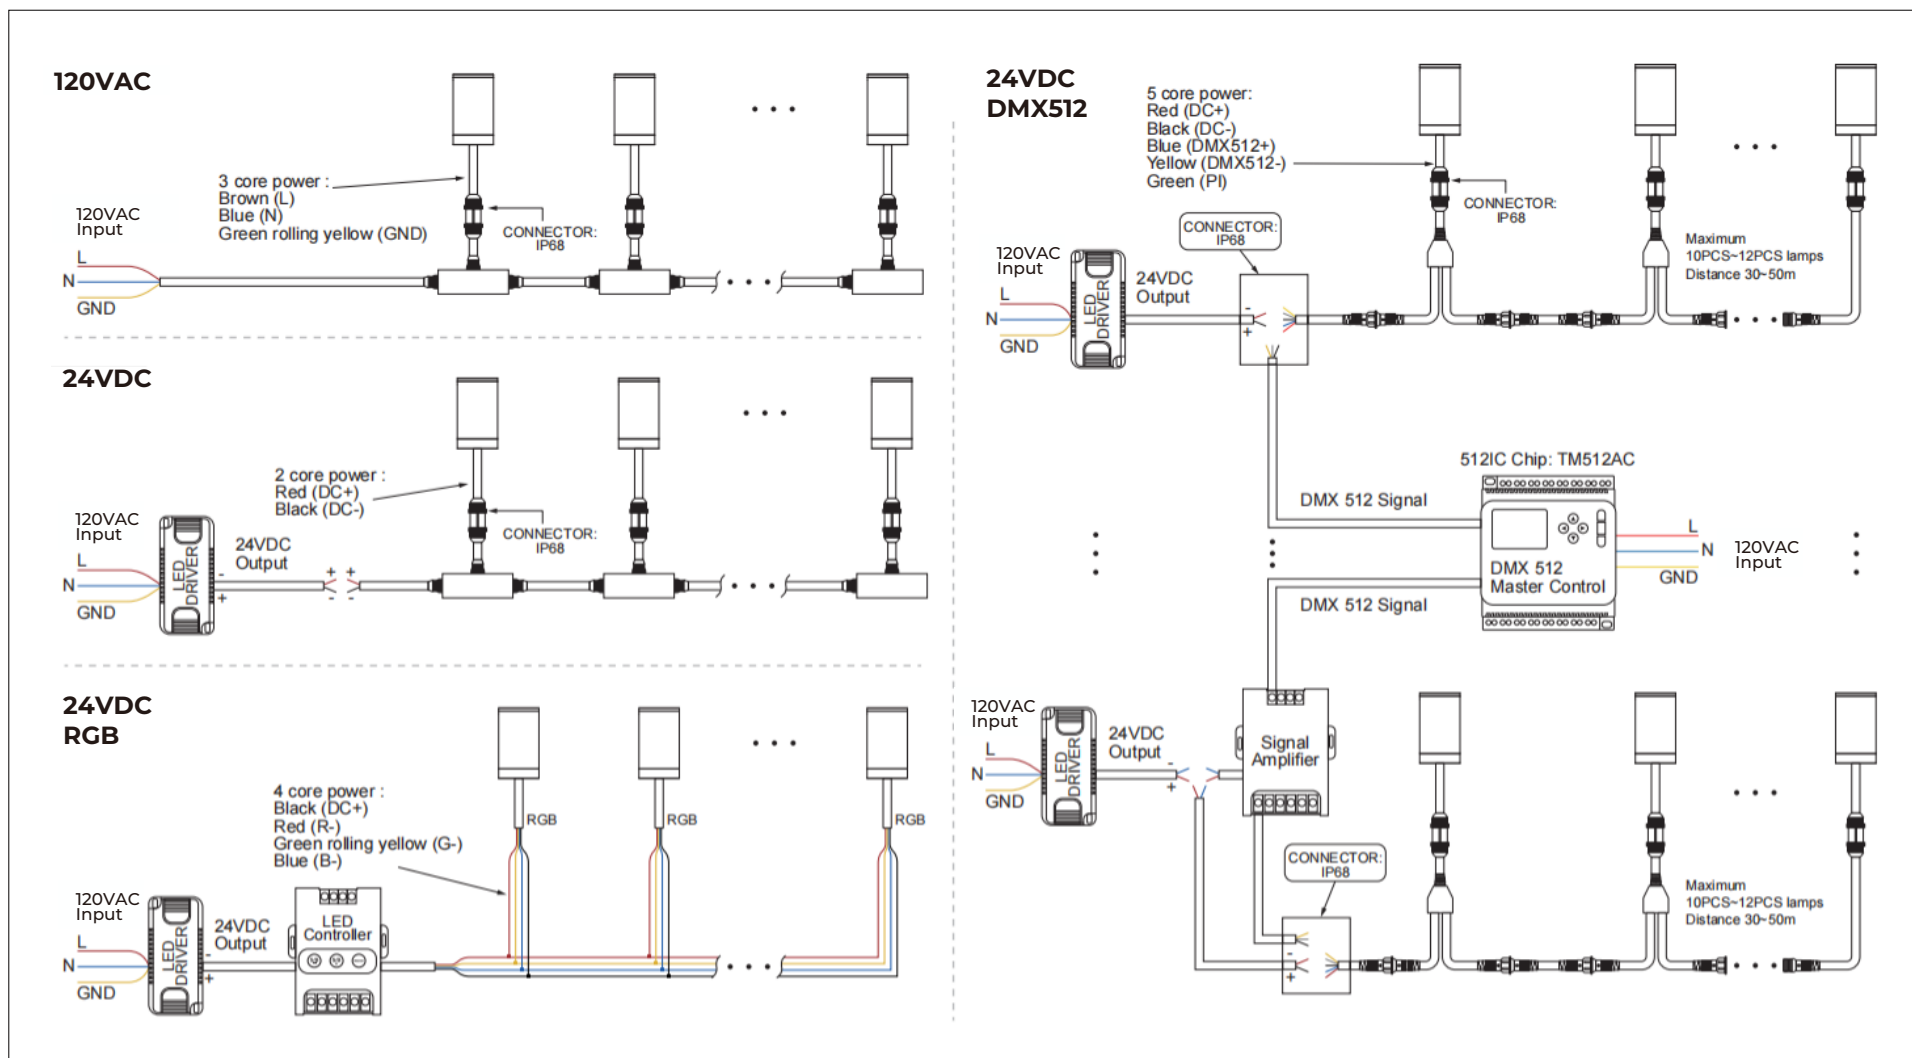

SAFETY INSTRUCTIONS BEFORE INSTALLATION

- * Installation must be carried out by a qualified technician or authorized professional.
- * Always disconnect power before installation to prevent the risk of electric shock.
- * Ensure adequate ventilation space around the LED heat sink to allow proper cooling.
- * Only connect LED luminaires using the recommended drivers.
- * The actual product may vary slightly from the illustrations shown.
- * Do not attempt to disassemble the product.
- * Any damage caused by modifications or improper installation will void the warranty.

