A Cylinder

BINA COMPANY

INSTALLATION INSTRUCTIONS

SAFETY INSTRUCTIONS

IMPORTANT: Disconnect power at fuse or circuit breaker before attempting to install, service, or remove.

· Read all instructions before installing.
· It is important that this product is installed by a qualified electrician in accordance with the National Electrical Code and local regulations.
· To prevent early lamp failure, lamp should be only be installed in operating environments between -4°F and +104°F.

ATTENTION

· Turn power off before inspection, installation, or removal.
· Check the product label or specification for suitability for dry, damp or wet locations.
· Inspect the product and accessories for damage. Do not install the product if there is any visible sign of damage.
· All parts must be used as indicated in these instructions. Do no substitute any parts, leave parts out, or use any parts that are worn out or broken.

Direct ceiling mount with integral mounting plate and driver

J-BOX BY OTHERS

1.56″ 39.6mm
3.55″ 90.2mm
3.55″ 90.2mm
4.00″ 101.6mm

1

Junction Box (existing)

Line voltage wires
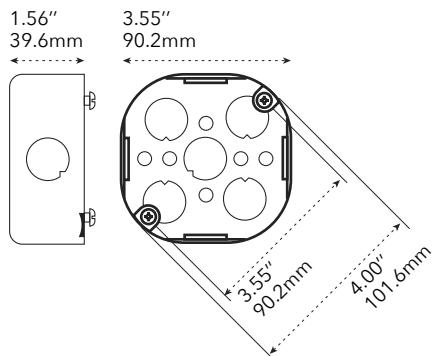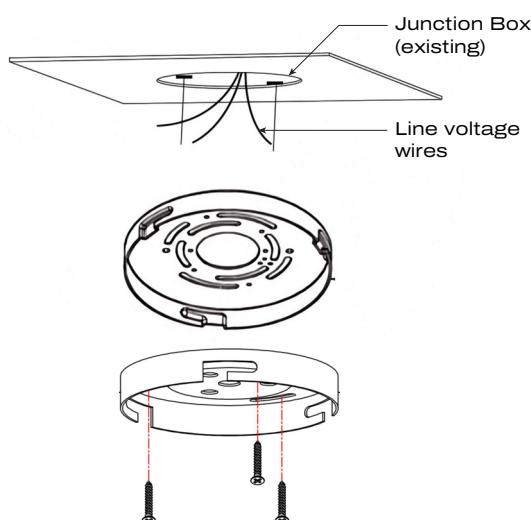
Open the luminaire rear cover and fasten the rear cover to the ceiling using the supplied mounting screws.

2

Dimming signal wire

Power input wire
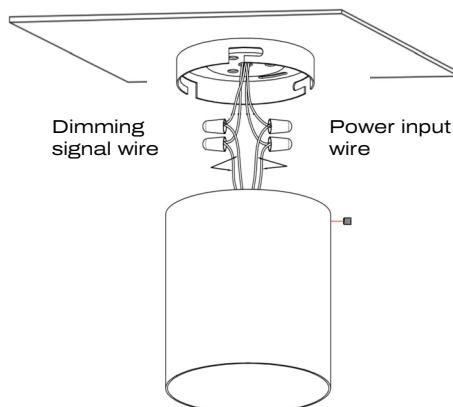
Make all electrical connections at the junction box in accordance with local electrical codes:

Black: L (Line)White: N (Neutral)
0-10V Dimming:
Violet: Dim + Pink: Dim -
Red: LED +
Blue: LED -

3
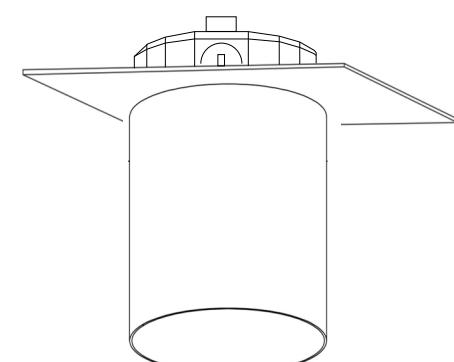
Thread the luminalre body onto the mounted rear cover until fully seated and secure. Restore power to the circuit and verify proper operation.

✉ info@binacompany.com
📞 305.735.3114
🌐 www.binacompany.com

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.