

Project:

Type:

Qty:

Wide selection of luminaires that work with both the LITHE and CATWALK lighting systems.

48V An assortment of spots, linear and decorative pendants in 48V DC



Dimmable down to 1% (0-10V) and DALI. Premium dimming (.1% 0-10V) available (consult factory).



CCT Warm dimming and tunable white available (consult factory)

Fixtures click and lock into place

Spot Luminaires



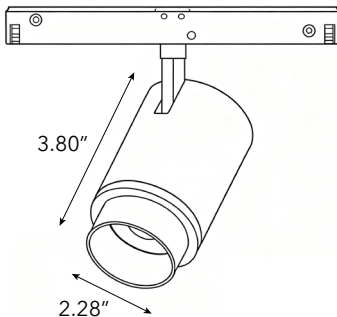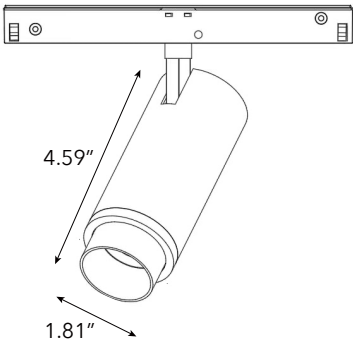

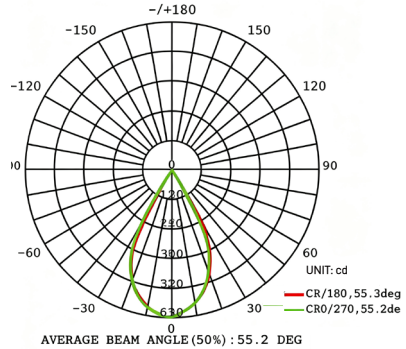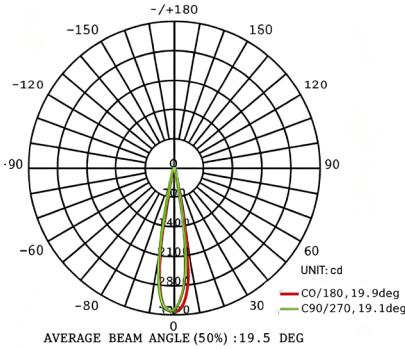



Zoom Lens - 15 - 55 degree

ORDER CODE:

MODEL	VOLTAGE	CRI	CCT	BEAM
Z6 6W(395-450lm) Z15 15W (1140-1215lm)	48V 48VDC	80 80Ra 90 90Ra	27K 2700K 30K 3000K 35K 3500K 40K 4000K TW Tunable White 2700K-6500K WD Warm Dim 3000K-1800K	Z Zoomable Lens
DIMMING	FINISH	ACCESSORY		
10 0-10V DALI DALI WLS Wireless / Bluetooth	WH White BK Black RAL Custom RAL	HC Honeycomb Black LS Linear Spread		

Factory will determine required quantities of power supplies, drivers, connectors, corners, and accessories based on the project design. Please provide RCP and detailed drawings showing all runs and connection points for proper configuration.
Refer to Page 11 for power supply ordering information.


Project:

Type:


Qty:

Spot Luminaires


Spots

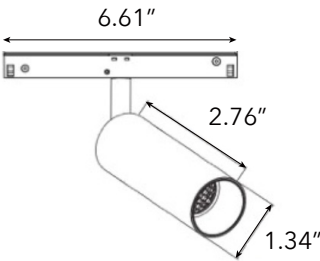


S8

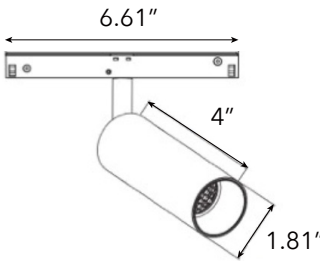


S12

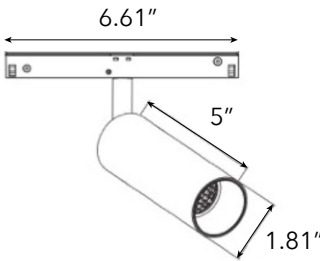


S15

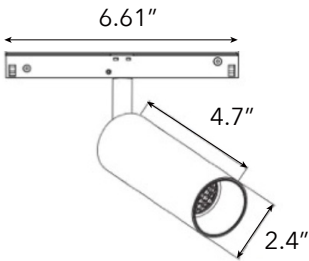


S21

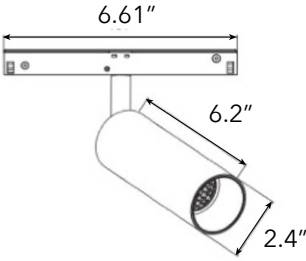


S23

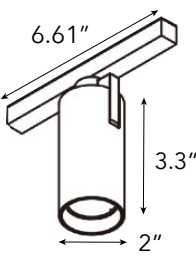

S15A

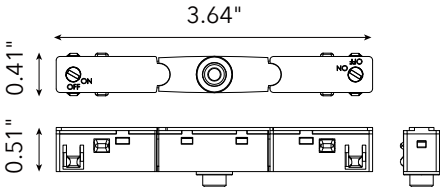

Flexible track head for curved tracks



Flexible arm for upright track

Please consult BINA for detailed information based on your specific requirements.



HC



LS



CB

ORDER CODE:

MODEL		VOLTAGE	CRI	CCT		BEAM	DIMMING
S8	8W (560lm)	48V 48VDC	80 80Ra	27K	2700K	15D 15 degree	10 0-10V
S12	12W (840lm)		90 90Ra	30K	3000K	24D 24 degree	DALI DALI
S15	15W (1260LM)			35K	3500K	36D 36 degree	WLS Wireless / Bluetooth
S21	21W (1470lm)			40K	4000K		
S23	22.5 (1725lm)			TW	Tunable White 2700K-6500K		
S15A	15W (1050lm)			WD	Warm Dim 3000K-1800K		

FINISH	ACCESSORY
WH White	HC Honeycomb Black
BK Black	LS Linear Spread
RAL Custom RAL	CB Cross Baffle


Project:

Type:

Qty:

Linear Luminaires

Linear Baffle

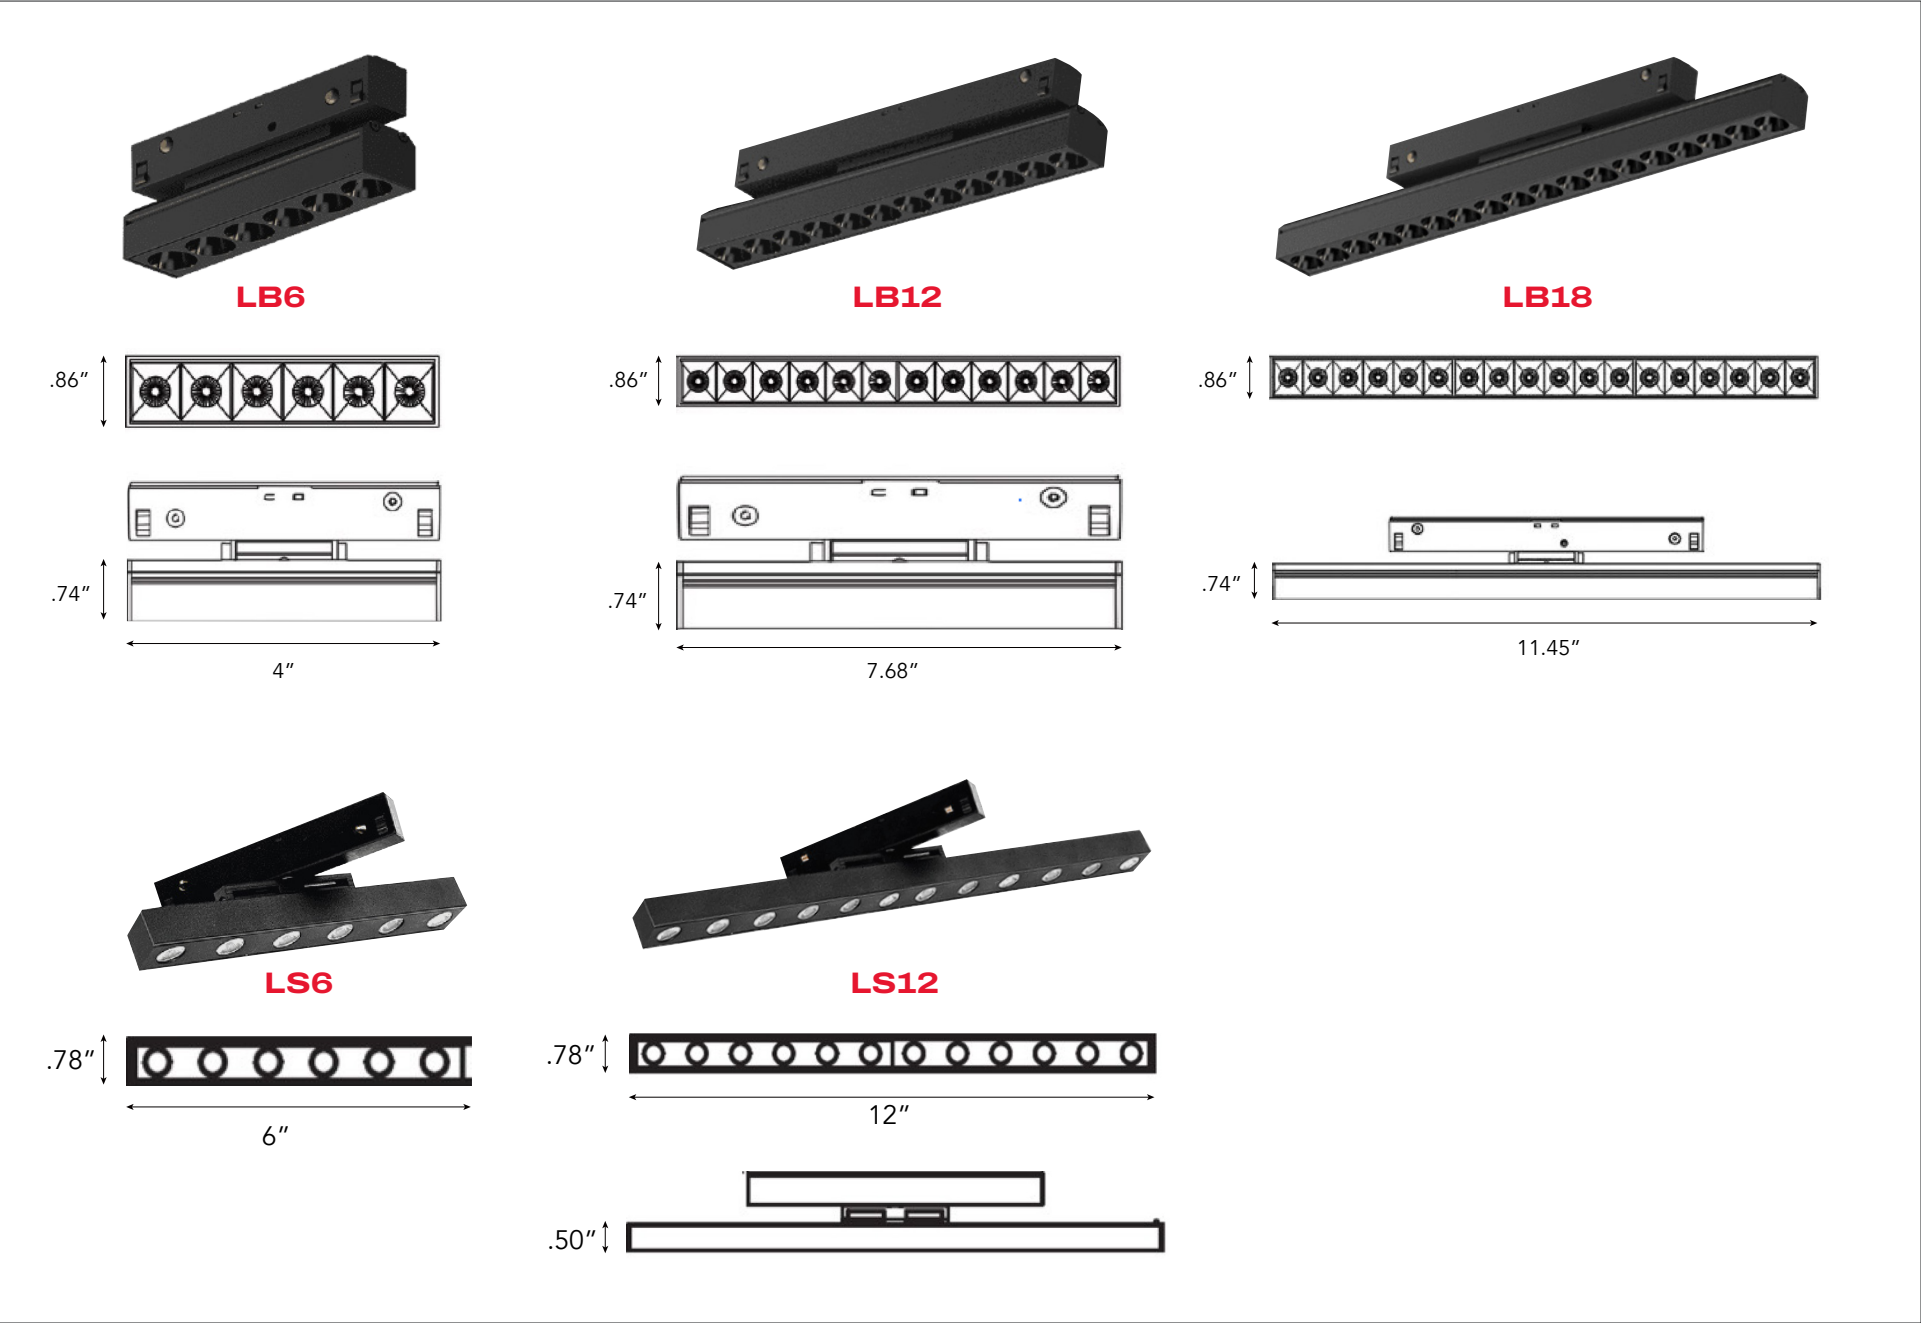

ORDER CODE:

MODEL		VOLTAGE	CRI	CCT		BEAM			
		48V 48VDC	80 80Ra 90 90Ra			LB Series		LB Series	
LB6	6W (420lm)			27K	2700K	20D 20 degree 34D 34 degree 48D 48 degree	20D 20 degree 45D 45 degree 60D 60 degree		
LB12	12W (840lm)			30K	3000K				
LB18	18W (1260lm)			35K	3500K				
LS6	6W (480lm)			40K	4000K				
LS12	12W (1120lm)			TW Tunable White 2700K-6500K					
		WD Warm Dim 3000K-1800K							
DIMMING		FINISH							
10	0-10V	WH White							
DALI	DALI	BK Black							
WLS	Wireless / Bluetooth	RAL Custom RAL							


Project:

Type:

Qty:

Linear Luminaires

Linear Frost

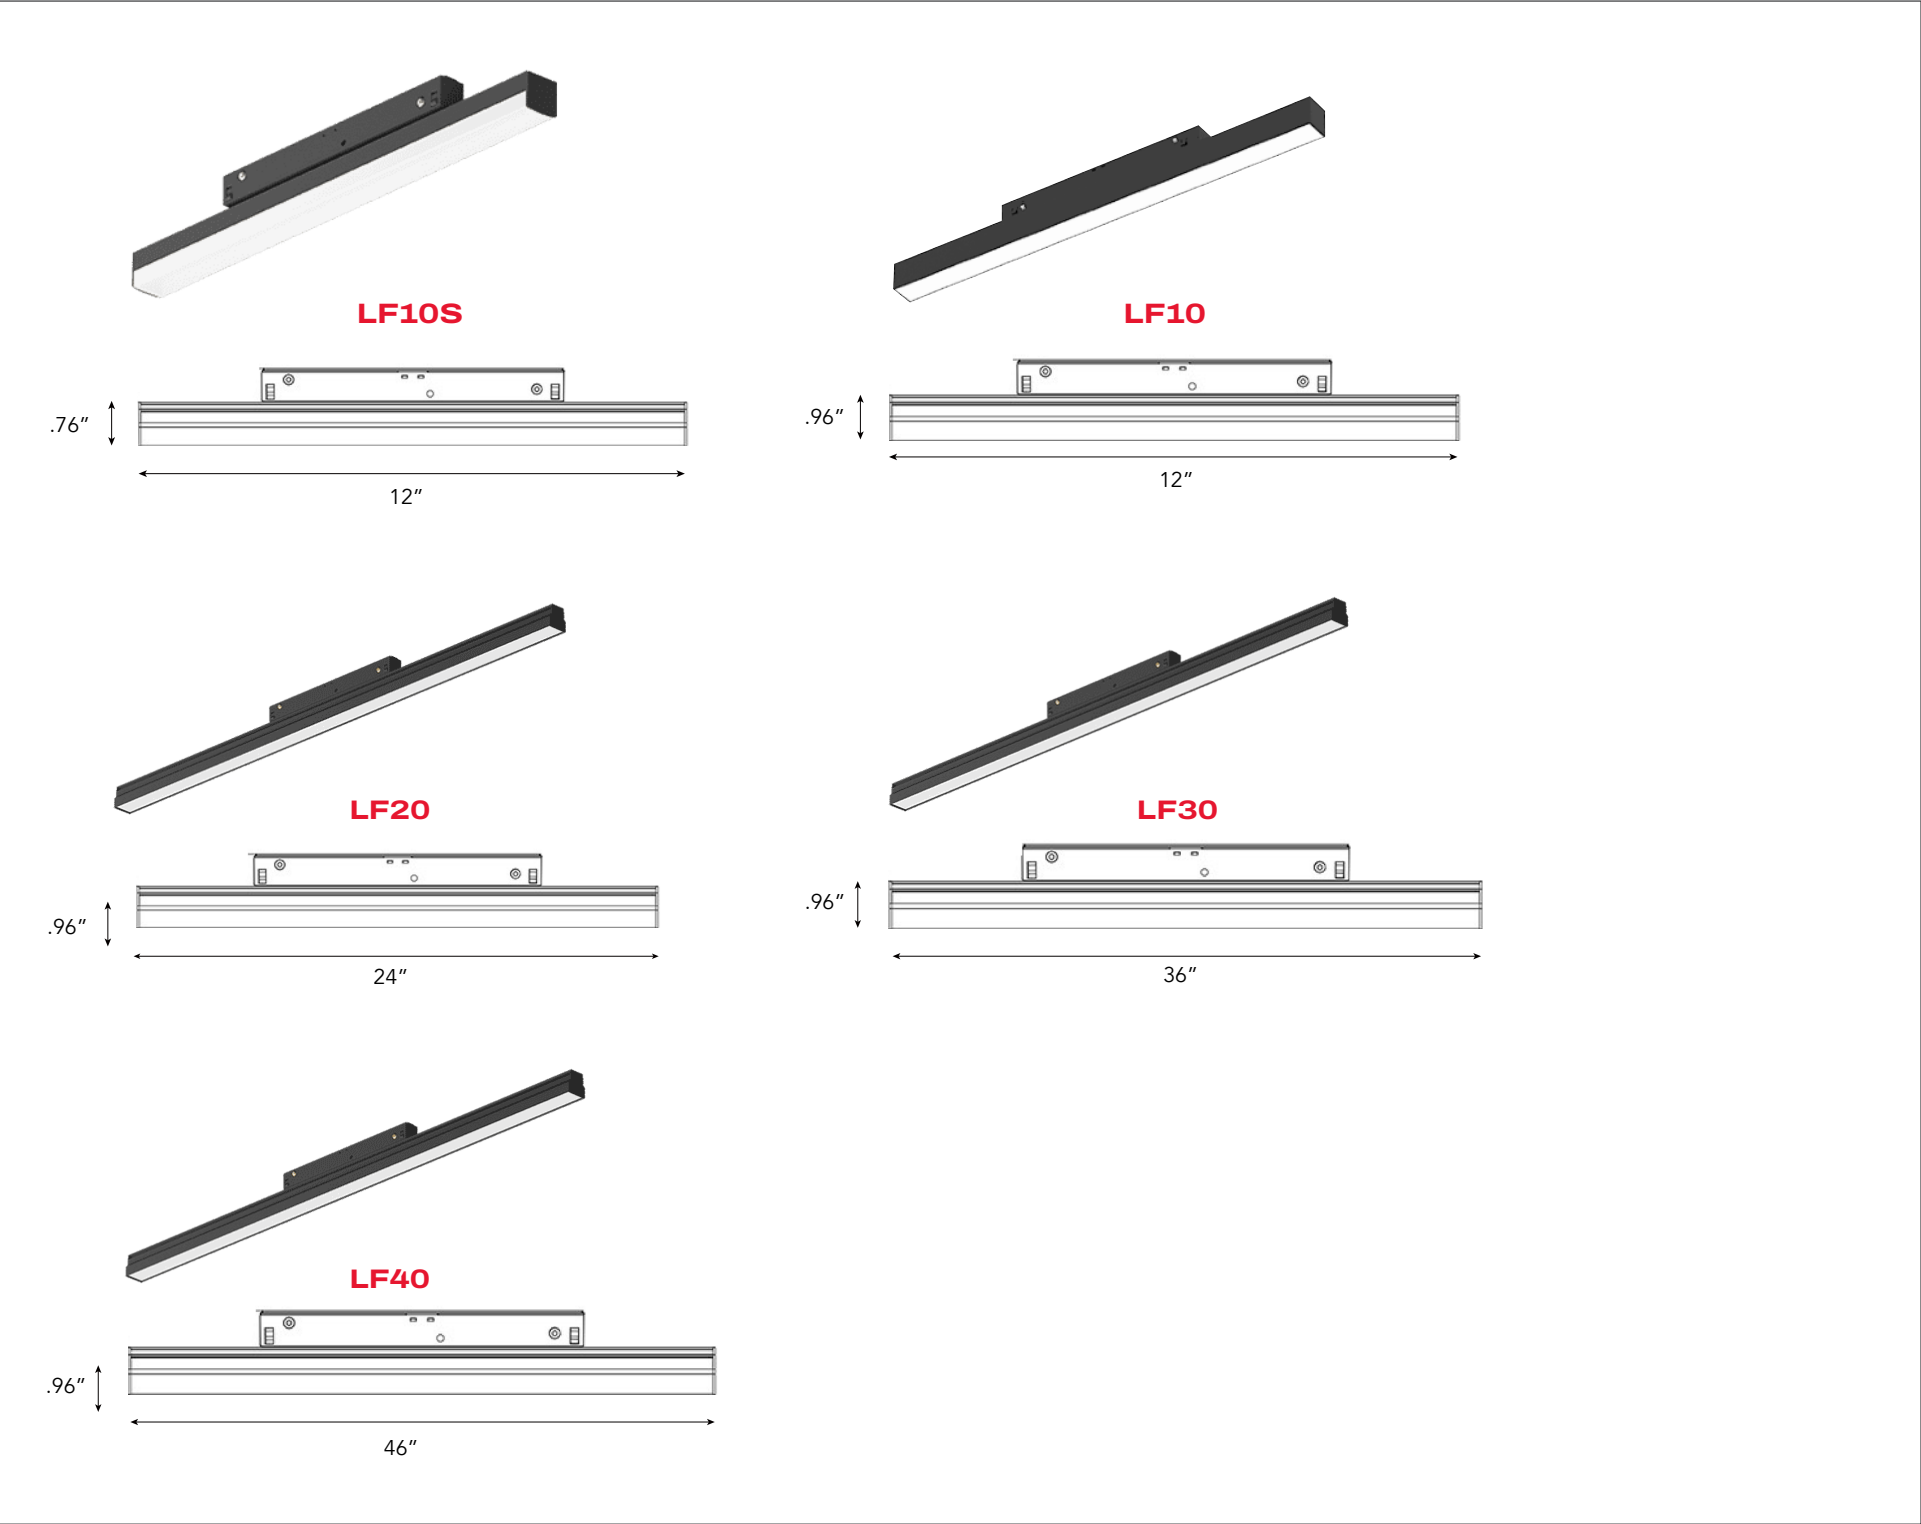

ORDER CODE:

MODEL	VOLTAGE	CRI	CCT	BEAM	DIMMING	FINISH
LF10S 10W (600lm)	48V 48VDC	80 80Ra 90 90Ra	27K 2700K	100D LF10, LF20, LF40 300D LF10S	10 0-10V DALI DALI WLS Wireless / Bluetooth	WH White BK Black RAL Custom RAL
LF10 10W (600lm)			30K 3000K			
LF20 20W (1200lm)			35K 3500K			
LF30 30W (1800l			40K 4000K			
LF40 40W (2400lm)			TW Tunable White 2700K-6500K			
			WD Warm Dim 3000K-1800K			

Project:

Type:

Qty:

Linear Luminaires

Light Bars

B10



1.5' Long

B20



3.5' Long

B30



5' Long

B40



7' Long

BU12



3.8' Long

Light Bar for indirect/up lighting only

Contact factory for custom lengths

ORDER CODE:

MODEL		VOLTAGE	CRI		CCT		BEAM	DIMMING		FINISH
B10	10W (600lm)	48V 48VDC	80	80Ra	27K	2700K	D Diffused	10	0-10V	WH White
B20	20W (1200lm)		90	90Ra	30K	3000K		DALI	DALI	BK Black
B30	30W (1800lm)				35K	3500K		WLS	Wireless / Bluetooth	RAL Custom RAL
B40	40W (2400lm)				40K	4000K				
BU12	12W (600lm)				TW	Tunable White 2700K-6500K				
					WD	Warm Dim 3000K-1800K				


Project:

Type:



Qty:

Foldable Luminaires



Foldable

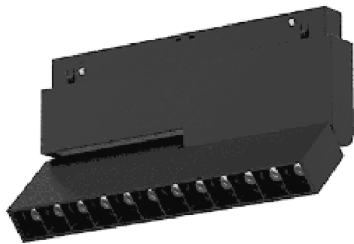

FB12

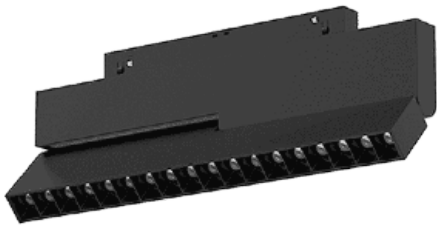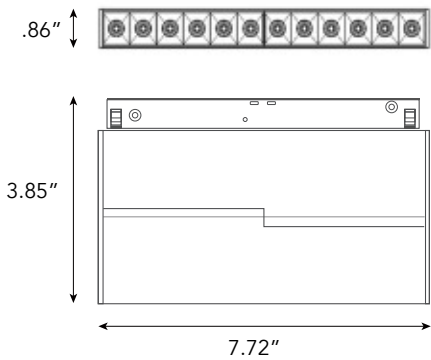



FB18

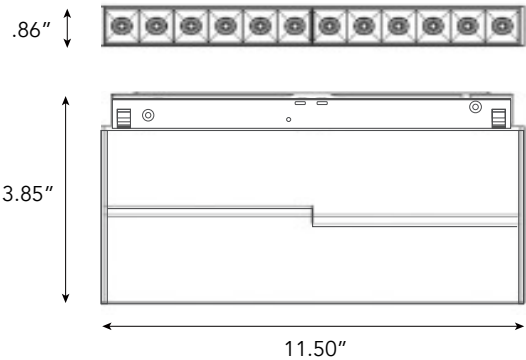


*Swivel mount base also available.
Add "SV" to model #



FF8

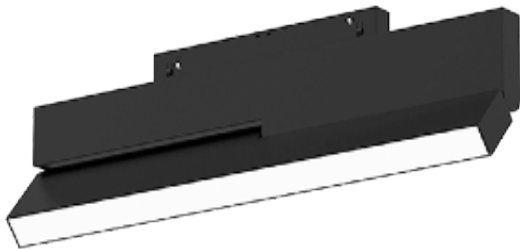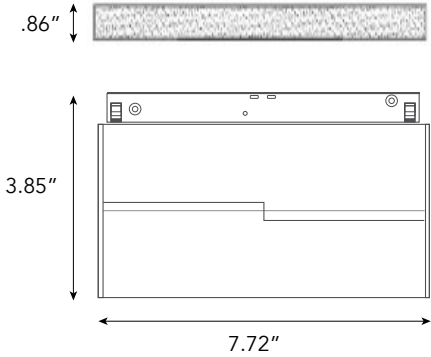

FF15

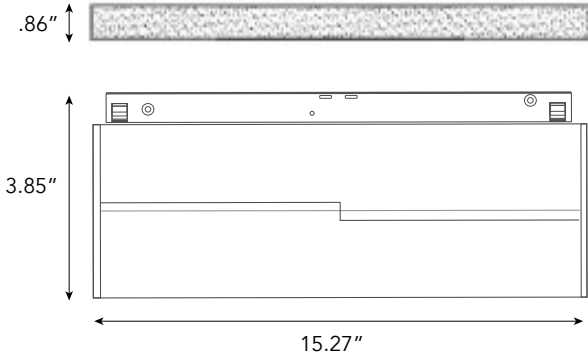

ORDER CODE:


MODEL	VOLTAGE	CRI	CCT	BEAM	DIMMING	FINISH
FB12 12W (960lm)	48V 48VDC	80 80Ra	27K 2700K	25D 25 degree	10 0-10V	WH White
FB18 18W (1260lm)		90 90Ra	30K 3000K	45D 45 degree	DALI DALI	BK Black
FF8 8W (480lm)			35K 3500K	60D 60 degree	WLS Wireless / Bluetooth	RAL Custom RAL
FF15 15W (900lm)			40K 4000K	110D Only FF Series		
			TW Tunable White 2700K-6500K			
			WD Warm Dim 3000K-1800K			

Project:

Type:

Qty:

Wall Wash and Flexible Luminaires






SW15

Spot with wall wash optic. 90 degree adjustment with 360 degree rotation




WW12

Superior wall-washing and glare control performance

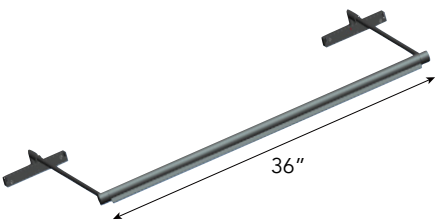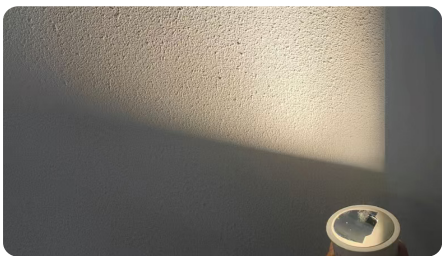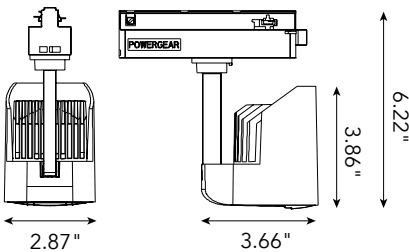


ARM20

Single polarized wall washer with a rotatable bar, making it easy to aim the light where you need it.




ASY20



DAS20

Asymmetric linear wall wash with single and dual polarized optic

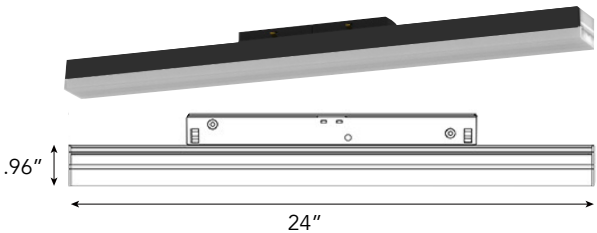

Flexible



SC6 SC12 SC18

Soft Silicone for straight and curved track



CH6

Flexible Chain for straight and curved track

ORDER CODE:

MODEL		VOLTAGE	CRI		CCT	BEAM		DIMMING		FINISH
SW15	15W (1200lm)	48V 48VDC	80	80Ra	27K 2700K	25D	25 degree	10	0-10V	WH White
WW12	12W(960lm),		90	90Ra	30K 3000K	45D	45 degree	DALI	DALI	BK Black
ASY20	20W (1600lm)				35K 3500K	60D	60 degree	WLS	Wireless / Bluetooth	RAL Custom RAL
DAS20	20W (1600lm)				40K 4000K	----	Leave Blank			
ARM20	20W (1550lm)				TW Tunable White 2700K-6500K					
SC6	6W (210lm)				WD Warm Dim 3000K-1800K					
SC12	12W (420lm)									
SC18	18W (840lm)									
CH6	6W (480lm)									

Project:

Type:

Qty:

Point Sources

Point Source



25D -
25 degree only

PS9



Also available in
GD - Gold

PS10



PS20









TAG46



TAG55



TAG55-S



ORDER CODE:

MODEL		VOLTAGE	CRI		CCT	BEAM		DIMMING		FINISH
PS9	9W (650LM)	48V 48VDC	80	80Ra	27K 2700K	15D	15 degree	10	0-10V	WH White
PS10	10W (750LM)		90	90Ra	30K 3000K	24D	24 degree	DALI	DALI	BK Black
PS20	20W (1500LM)				35K 3500K	36D	36 degree	WLS	Wireless / Bluetooth	RAL Custom RAL
TAG46	10W (600LM)				40K 4000K					
TAG55	15W (900LM)				TW Tunable White 2700K-6500K					
TAG55-S	10W (600LM)				WD Warm Dim 3000K-1800K					
TAG75-S	15W (900LM)									

Project:

Type:

Qty:

Decorative Luminaires



ORDER CODE:

MODEL		VOLTAGE	CRI	CCT	BEAM	DIMMING	FINISH	
Tube8	5W (250lm)	48V 48VDC	80 80Ra	27K 2700K	15D 15 degree	10 0-10V	WH	White
Tube12	5W (250lm)		90 90Ra	30K 3000K	24D 24 degree	DALI DALI	BK	Black
Glow-Tube13	10W (550lm)			35K 3500K	36D 36 degree	WLS Wireless / Bluetooth	CL	Clear
Glow-Tube26	20W (1100lm)			40K 4000K	*D Diffused		SM	Smokey For 5"Glass Only
Glow-Tube39	25W (1375lm)			TW Tunable White 2700K-6500K			RD	Red For 5"Glass Only
Cone	5W (225lm)			WD Warm Dim 3000K-1800K			TL	Teal For 5"Glass Only
Teardrop	5W (500lm)						RAL	Custom RAL
Globe	10W (650lm)							
Tube8HP	12W (1100lm)							
Glass	15W (1100lm)							
ConeXL	18W (780lm)							

SUSPENSION		LENGTH CABLE
R	Rod	XX" inches Specify in
C	Cable/Wire	

Project:

Type:

Qty:


Decorative Luminaires



Sun10

Sun20


Sun10 - 3.96"
Sun20 - 5.33"



Sun20P

Sun35P

Sun20P - 10"
Sun35P - 17"

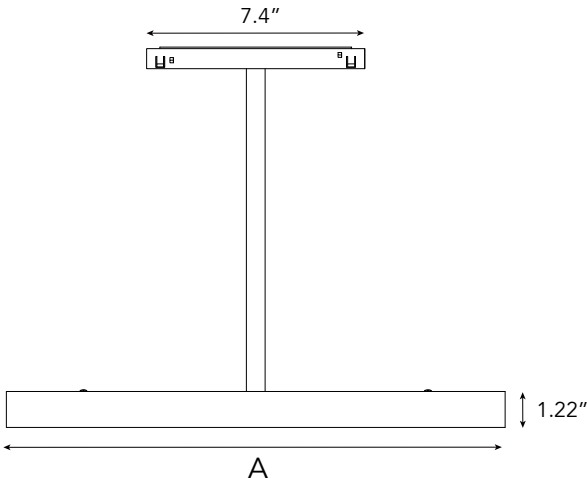

Ceiling Rod Length: 2" / 12" / 15.75" / 27.56" / Custom
Cable / Wire Length: Can be adjusted from 2" to 6'5".
Consult factory for longer lengths.

ORDER CODE:

MODEL		VOLTAGE	CRI	CCT		BEAM	DIMMING
Sun10	10W (840lm)	48V 48VDC	80 80Ra	27K	2700K	Leave 110 degree blank	10 0-10V
Sun20	20W (1740lm)		90 90Ra	30K	3000K		DALI DALI
Sun20P	20W (1740lm)			35K	3500K		WLS Wireless / Bluetooth
Sun35P	35W (2993lm)			40K	4000K		
				TW	Tunable White 2700K-6500K		
				WD	Warm Dim 3000K-1800K		

FINISH	SUSPENSION	LENGTH
WH White BK Black GD Gold RAL Custom RAL	R Rod C Cable/Wire	XX" inches Specify in

Project:	Type:	Qty:
----------	-------	------

Installation

1

Magnet

2

3

push the button

Click

Locked X2

4

5

push the button

Click

Unlocked X2

6

Power Supply-Order separately

Power Supply Options 60W / 96W / 100W / 150W / 200W / 288W / 300W / 384W available Order Code: POWER-**V**W Example: POWER-48V100W 	Integrated Driver & Dimmer Available Power: 60W / 96W / 160W Order Code: SDD-**V**W Example: SDD-48V60W-DIM 
--	--