

Project:

Type:

Qty:

Wide selection of luminaires that work with both the LITHE and CATWALK lighting systems.

48V An assortment of spots, linear and decorative pendants in 48V DC



Dimmable down to 1% (0-10V) and DALI. Premium dimming (.1% 0-10V) available (consult factory).



CCT Warm dimming and tunable white available (consult factory)


Fixtures click and lock into place

SPOT LUMINAIRES



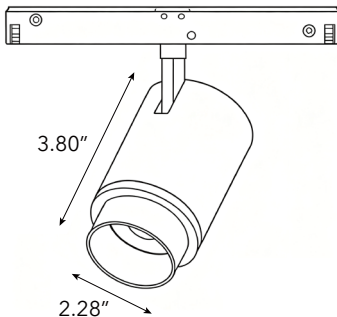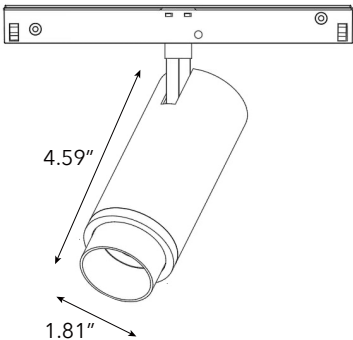

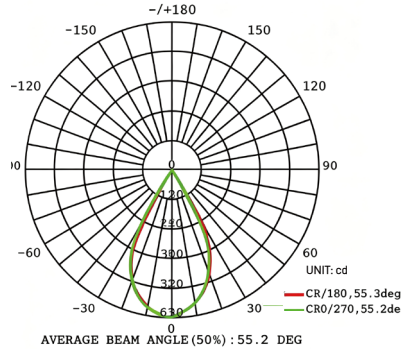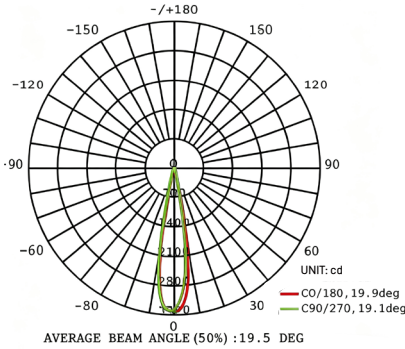

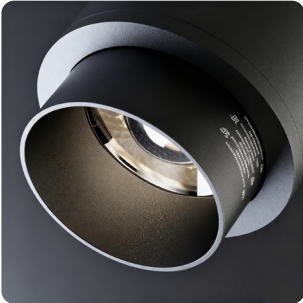

Zoom Lens - 15 - 55 degree

ORDER CODE

ORDER CODE EXAMPLE: Z6-48V-80-27K-Z-D10-WH-HC

MODEL	VOLTAGE	CRI	CCT	BEAM
Z6 6W(395-450lm)	48V 48VDC	80 80Ra 90 90Ra	27K 2700K	Z Zoomable Lens
Z15 15W (1140-1215lm)			30K 3000K	
			35K 3500K	
			40K 4000K	
			TW Tunable White 2700K-6500K	
			WD Warm Dim 3000K-1800K	
DIMMING	FINISH	ACCESSORY		
D10 0-10V	WH White	HC Honeycomb Black		
DALI DALI	BK Black	LS Linear Spread		
WLS Wireless / Bluetooth	RAL Custom RAL			
ELV ELV / Phase				


Project:

Type:


Qty:

SPOT LUMINAIRES


Spots




S8




S12

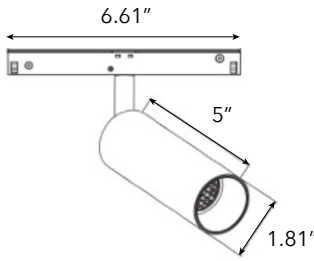


S15

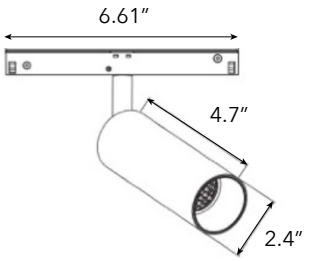


S21

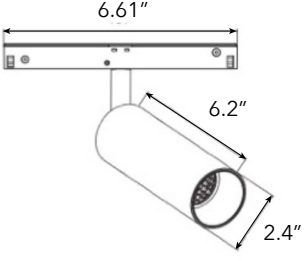


S23

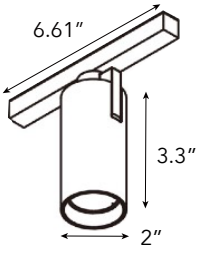

S15A

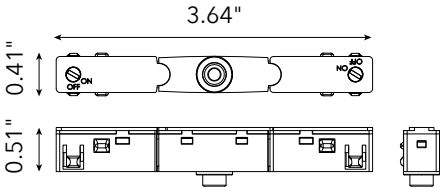

Flexible track head for curved tracks



Flexible arm for uplight track

Please consult BINA for detailed information based on your specific requirements.



HC



LS



CB

ORDER CODE

ORDER CODE EXAMPLE: S21-48V-80-30K-24D-D10-WH-HC

MODEL		VOLTAGE	CRI	CCT		BEAM	DIMMING
S8	8W (560lm)	48V 48VDC	80 80Ra	27K	2700K	15D 15 Degree	D10 0-10V
S12	12W (840lm)		90 90Ra	30K	3000K	24D 24 Degree	DALI DALI
S15	15W (1260LM)			35K	3500K	36D 36 Degree	ELV ELV / Phase
S21	21W (1470lm)			40K	4000K		WLS Wireless / Bluetooth
S23	22.5 (1725lm)			TW	Tunable White 2700K-6500K		
S15A	15W (1050lm)			WD	Warm Dim 3000K-1800K		

FINISH		ACCESSORY	
WH	White	HC	Honeycomb Black
BK	Black	LS	Linear Spread
RAL	Custom RAL	CB	Cross Baffle


Project:

Type:

Qty:

LINEAR LUMINAIRES

Linear Baffle

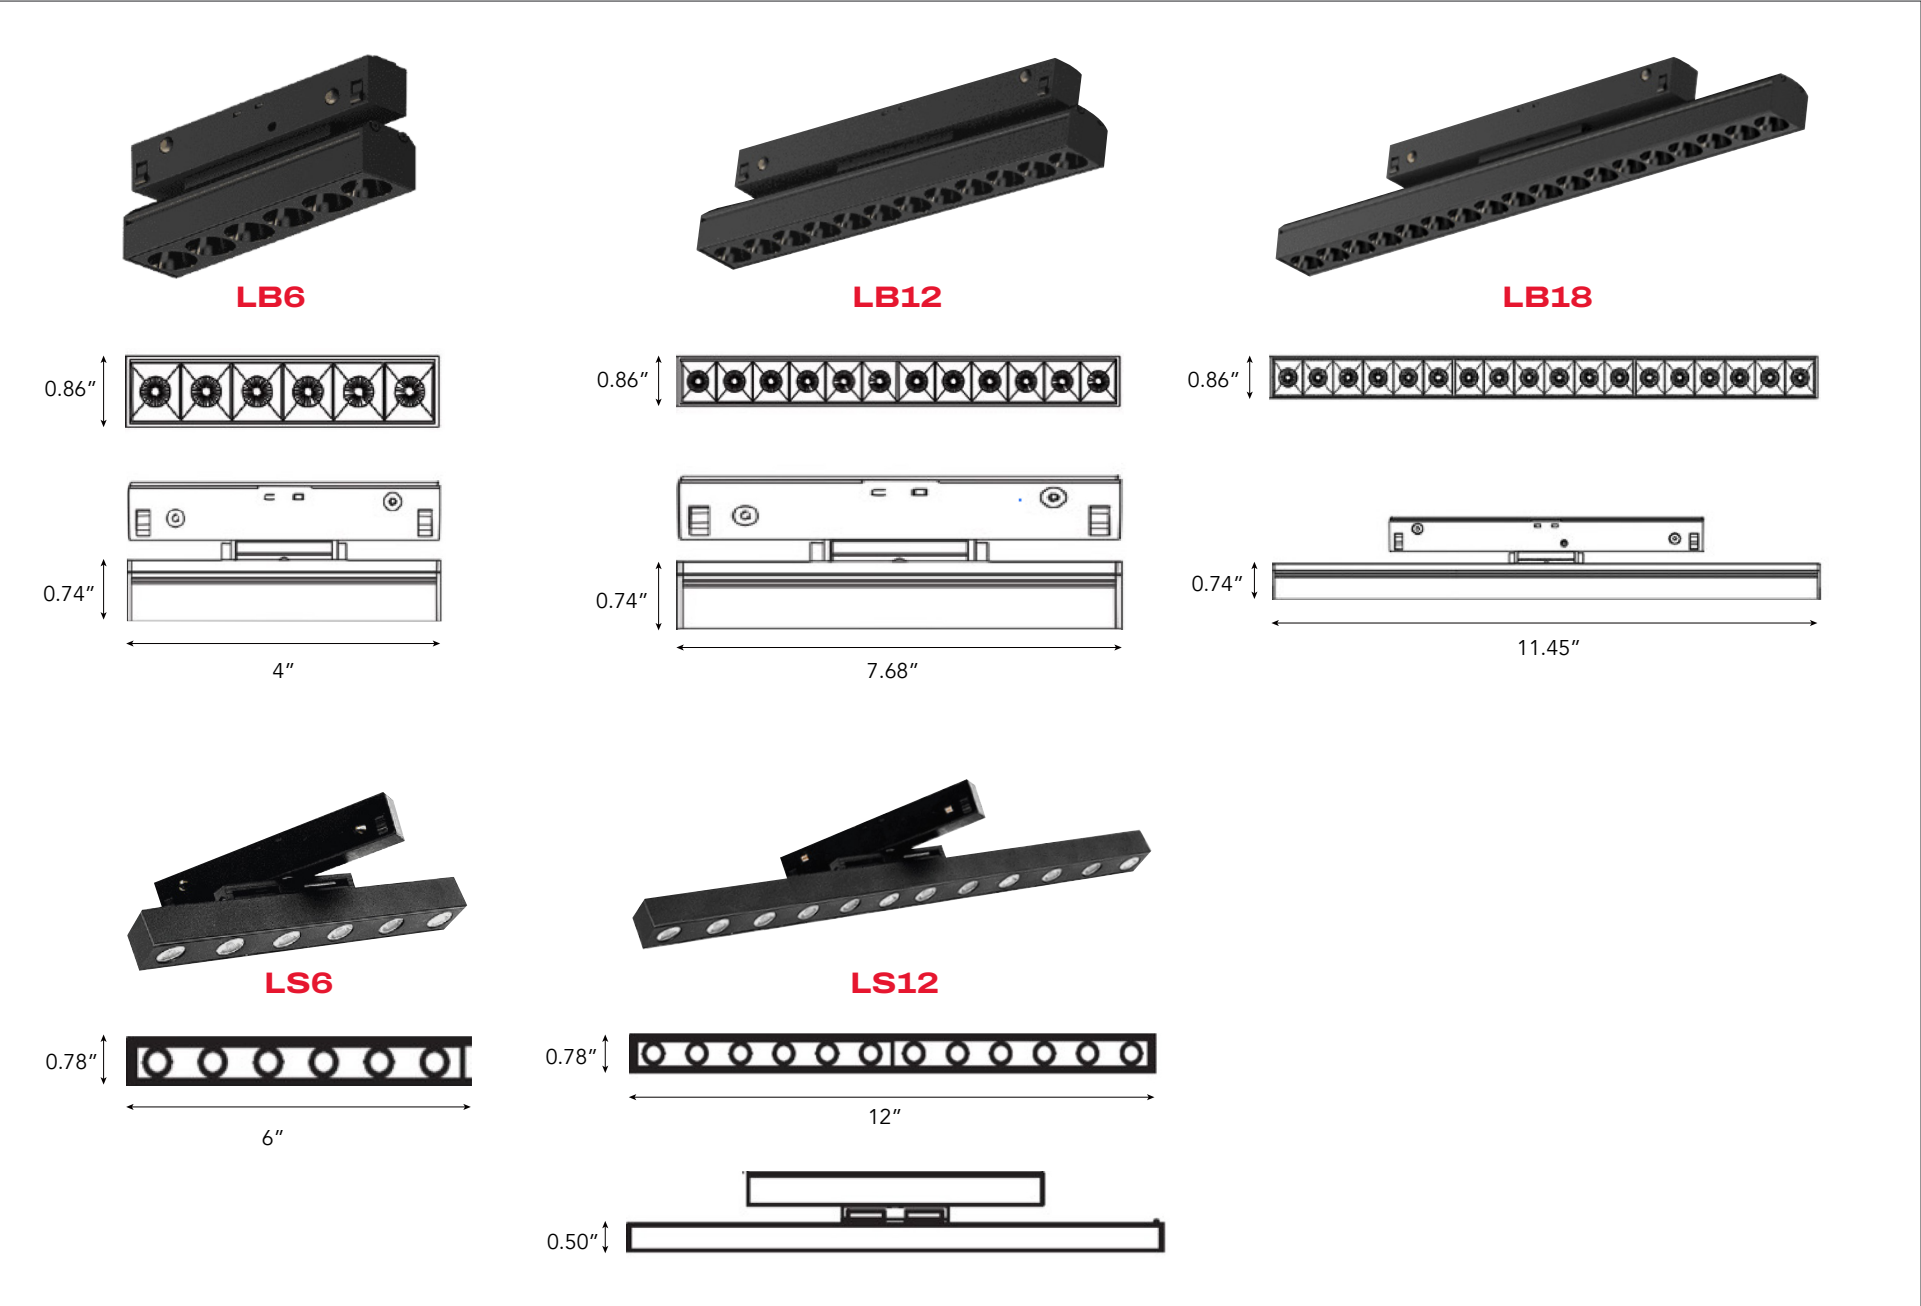

ORDER CODE

ORDER CODE EXAMPLE: LB6-48V-90-30K-34D-45D-DALI-BK

MODEL		VOLTAGE	CRI	CCT		BEAM				
						LB Series		LS Series		
LB6	6W (420lm)	48V 48VDC	80	80Ra	27K	2700K	20D 20 Degree	20D 20 Degree		
LB12	12W (840lm)		90	90Ra	30K	3000K			34D 34 Degree	45D 45 Degree
LB18	18W (1260lm)				35K	3500K			48D 48 Degree	60D 60 Degree
LS6	6W (480lm)				40K	4000K				
LS12	12W (1120lm)				TW	Tunable White 2700K-6500K				
					WD	Warm Dim 3000K-1800K				
DIMMING		FINISH								
D10	0-10V	WH White								
DALI	DALI	BK Black								
ELV	ELV / Phase	RAL Custom RAL								
WLS	Wireless / Bluetooth									


Project:

Type:

Qty:

LINEAR LUMINAIRES

Linear Frost

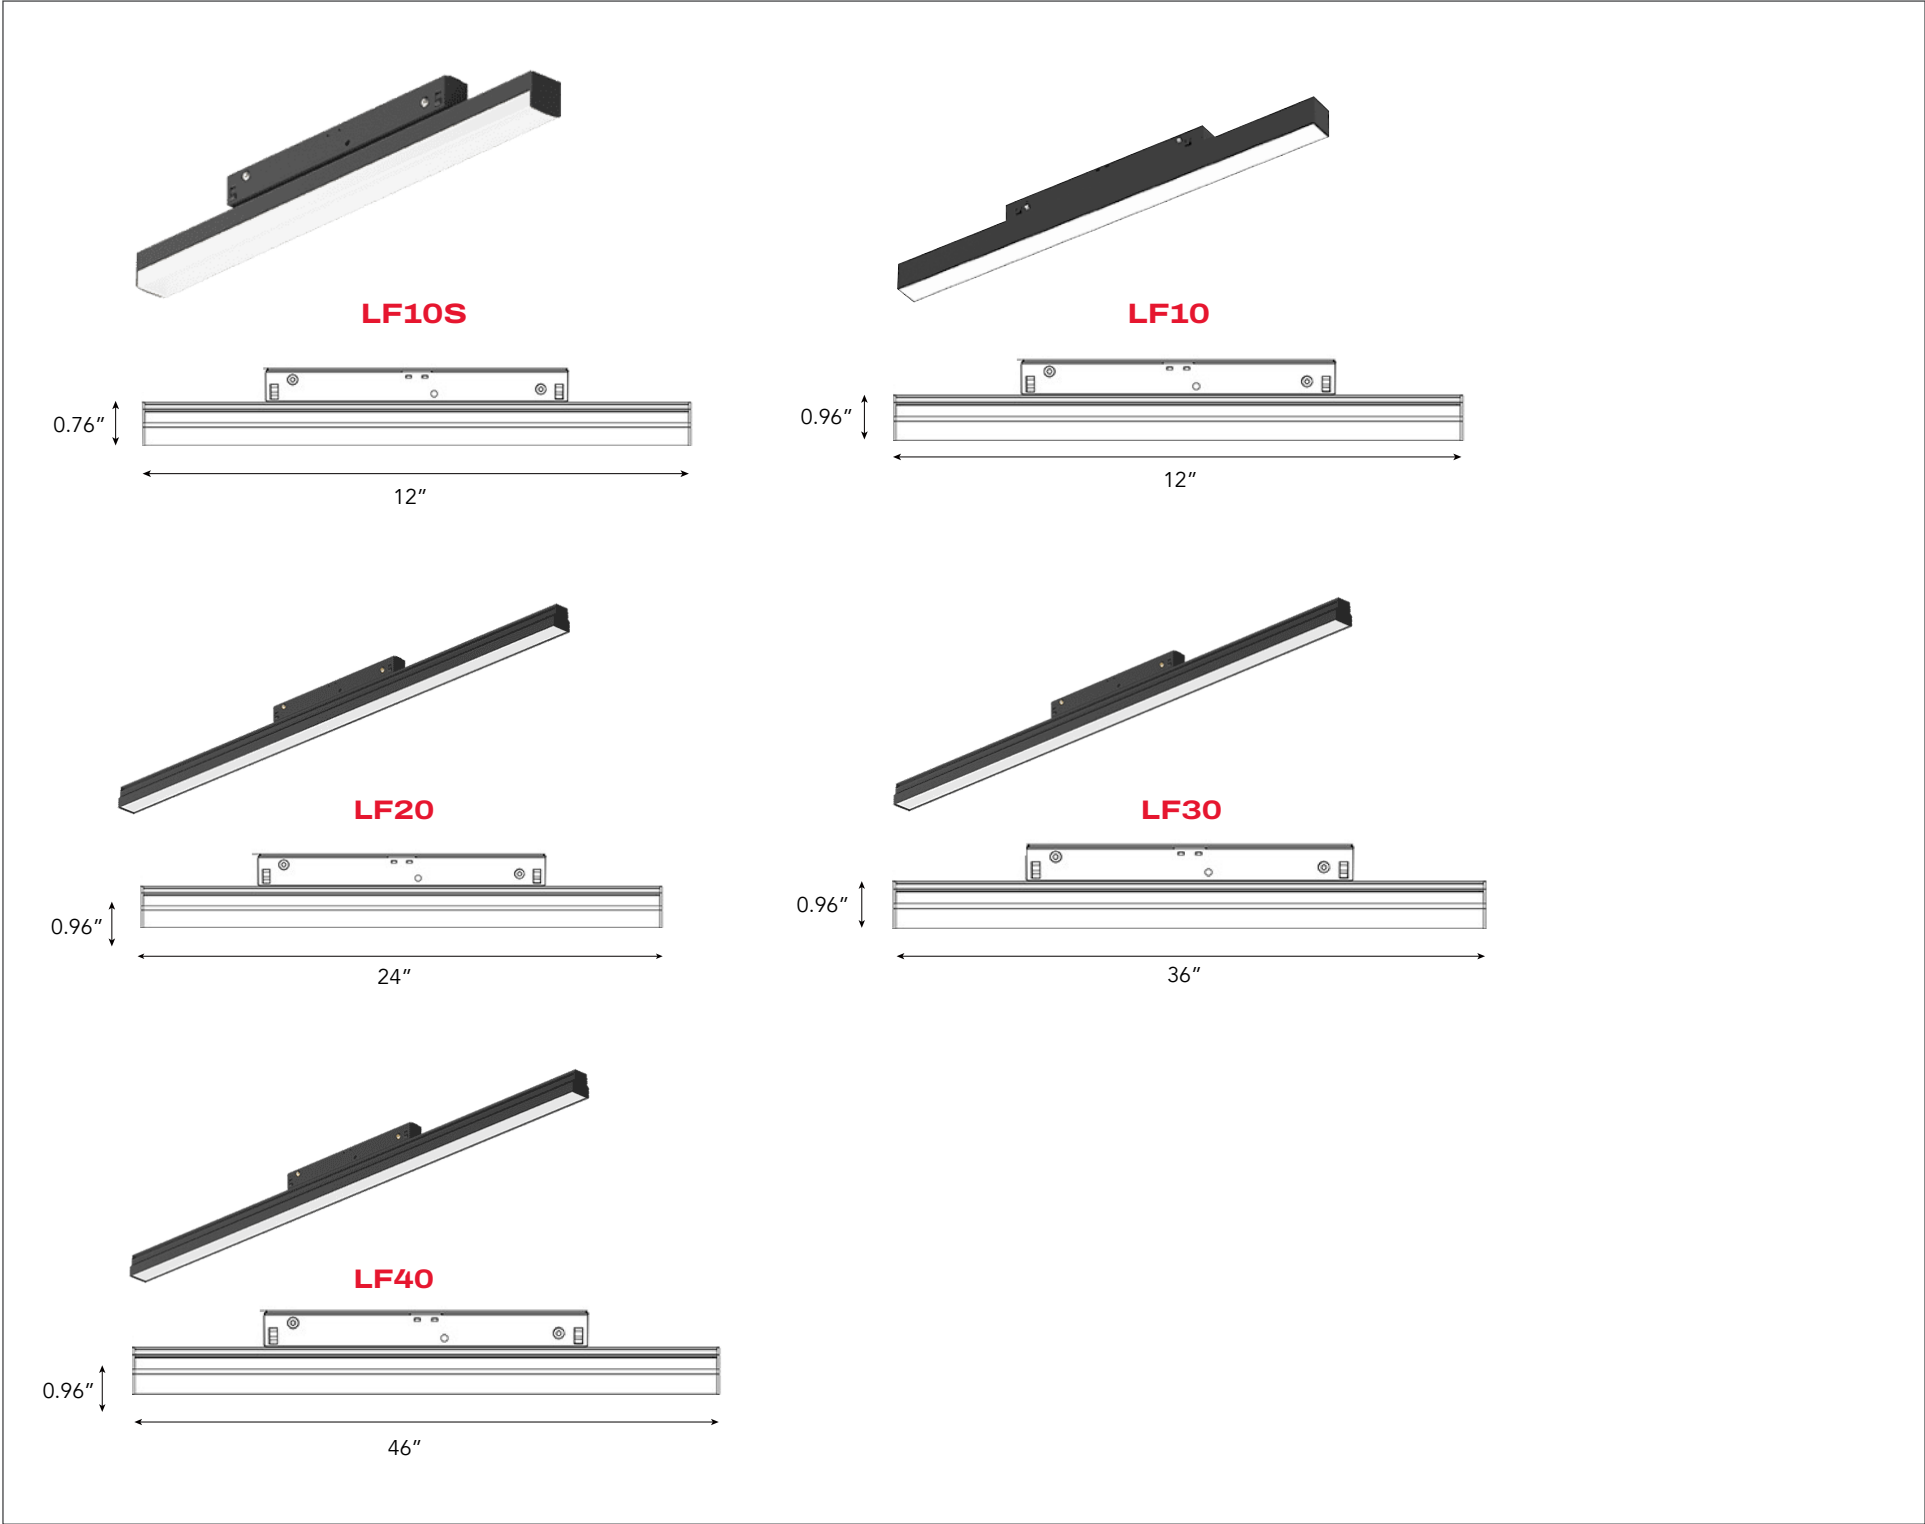

ORDER CODE

ORDER CODE EXAMPLE: LF10-48V-80-30K-100D-D10-WH

MODEL	VOLTAGE	CRI	CCT	BEAM	DIMMING	FINISH
LF10S 10W (600lm)	48V 48VDC	80 80Ra	27K 2700K	100D LF10, LF20, LF40	D10 0-10V	WH White
LF10 10W (600lm)		90 90Ra	30K 3000K	300D LF10S	DALI DALI	BK Black
LF20 20W (1200lm)			35K 3500K		ELV ELV / Phase	RAL Custom RAL
LF30 30W (1800l			40K 4000K		WLS Wireless / Bluetooth	
LF40 40W (2400lm)			TW Tunable White 2700K-6500K			
			WD Warm Dim 3000K-1800K			

Project:

Type:

Qty:

LINEAR LUMINAIRES

Light Bars

B10



1.5' Long

B20



3.5' Long

B30



5' Long

B40



7' Long

BU12



3.8' Long

Light Bar for indirect/up lighting only

Contact factory for custom lengths

ORDER CODE

ORDER CODE EXAMPLE: B10-48V-80-30K-D-D10-WH

MODEL		VOLTAGE	CRI		CCT		BEAM	DIMMING		FINISH	
B10	10W (600lm)	48V 48VDC	80	80Ra	27K	2700K	D Diffused	D10	0-10V	WH	White
B20	20W (1200lm)		90	90Ra	30K	3000K		DALI	DALI	BK	Black
B30	30W (1800lm)				35K	3500K		ELV	ELV / Phase	RAL	Custom RAL
B40	40W (2400lm)				40K	4000K		WLS	Wireless / Bluetooth		
BU12	12W (600lm)				TW	Tunable White 2700K-6500K					
					WD	Warm Dim 3000K-1800K					


Project:

Type:



Qty:

FOLDABLE LUMINAIRES



Foldable

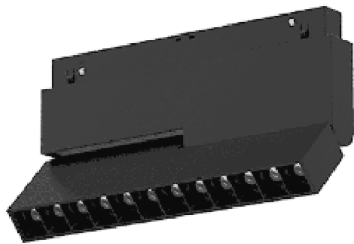

FB12

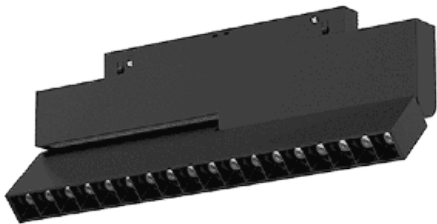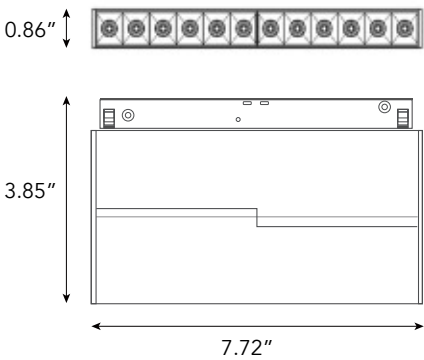



FB18

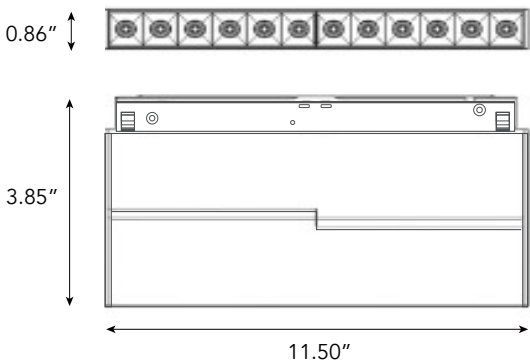


*Swivel mount base also available.
Add "SV" to model #



FF8

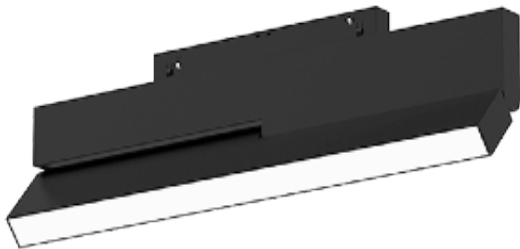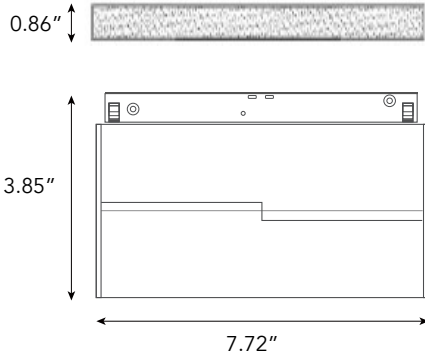

FF15

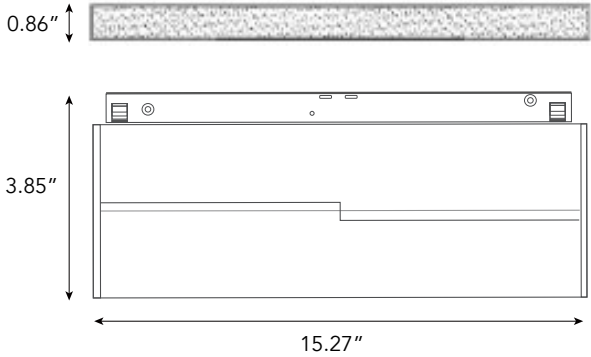

ORDER CODE

ORDER CODE EXAMPLE: FB12-48V-80-30K-25D-D10-WH


MODEL	VOLTAGE	CRI	CCT	BEAM	DIMMING	FINISH
FB12 12W (960lm)	48V 48VDC	80 80Ra	27K 2700K	25D 25 Degree	D10 0-10V	WH White
FB18 18W (1260lm)		90 90Ra	30K 3000K	45D 45 Degree	DALI DALI	BK Black
FF8 8W (480lm)			35K 3500K	60D 60 Degree	ELV ELV / Phase	RAL Custom RAL
FF15 15W (900lm)			40K 4000K	110D Only FF Series	WLS Wireless / Bluetooth	
			TW Tunable White 2700K-6500K			
			WD Warm Dim 3000K-1800K			

Project:

Type:

Qty:

WALL WASH AND FEXIBLE LUMINAIRES






SW15

Spot with wall wash optic. 90 degree adjustment with 360 degree rotation




WW12

Superior wall-washing and glare control performance

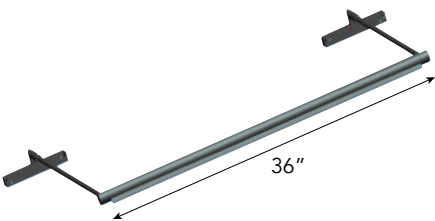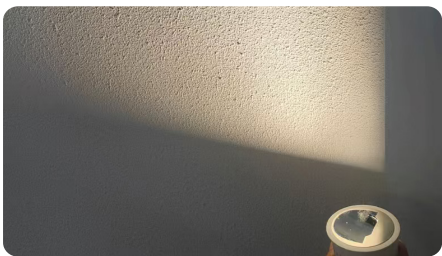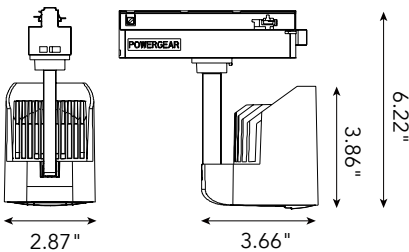


ARM20

Single polarized wall washer with a rotatable bar, making it easy to aim the light where you need it.

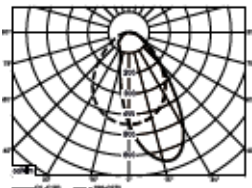


ASY20

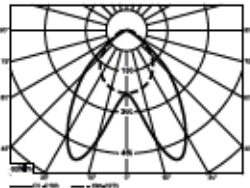

DAS20

Asymmetric linear wall wash with single and dual polarized optic

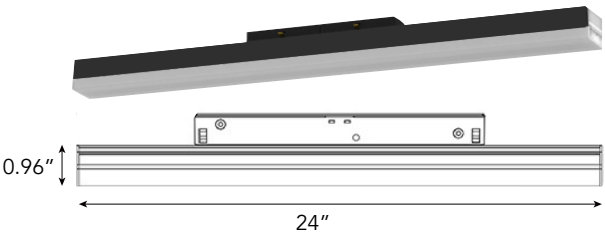

Flexible



SC6 SC12 SC18

Soft Silicone for straight and curved track



CH6

Flexible Chain for straight and curved track

ORDER CODE

ORDER CODE EXAMPLE: DAS20-48V-80-30K-25D-D10-WH

MODEL		VOLTAGE	CRI		CCT		BEAM		DIMMING		FINISH	
SW15	15W (1200lm)	48V 48VDC	80	80Ra	27K	2700K	25D	25 Degree	D10	0-10V	WH	White
WW12	12W(960lm),		90	90Ra	30K	3000K	45D	45 Degree	DALI	DALI	BK	Black
ASY20	20W (1600lm)				35K	3500K	60D	60 Degree	ELV	ELV / Phase	RAL	Custom RAL
DAS20	20W (1600lm)				40K	4000K	----	Leave Blank	WLS	Wireless / Bluetooth		
ARM20	20W (1550lm)				TW Tunable White 2700K-6500K							
SC6	6W (210lm)				WD Warm Dim 3000K-1800K							
SC12	12W (420lm)											
SC18	18W (840lm)											
CH6	6W (480lm)											

Project:

Type:

Qty:

POINT SOURCES

Point Source



25D -
25 degree only

PS9



Also available in
GD - Gold

PS10



PS20









TAG46



TAG55



TAG55-S



ORDER CODE

ORDER CODE EXAMPLE: PS9-48V-80-30K-24D-D10-WH


MODEL		VOLTAGE	CRI		CCT		BEAM		DIMMING		FINISH	
PS9	9W (650LM)	48V 48VDC	80	80Ra	27K	2700K	15D	15 Degree	D10	0-10V	WH	White
PS10	10W (750LM)		90	90Ra	30K	3000K	24D	24 Degree	DALI	DALI	BK	Black
PS20	20W (1500LM)				35K	3500K	36D	36 Degree	ELV	ELV / Phase	RAL	Custom RAL
TAG46	10W (600LM)				40K	4000K			WLS	Wireless / Bluetooth		
TAG55	15W (900LM)				TW	Tunable White 2700K-6500K						
TAG55-S	10W (600LM)				WD	Warm Dim 3000K-1800K						
TAG75-S	15W (900LM)											

Project:

Type:

Qty:

DECORATIVE LUMINAIRES

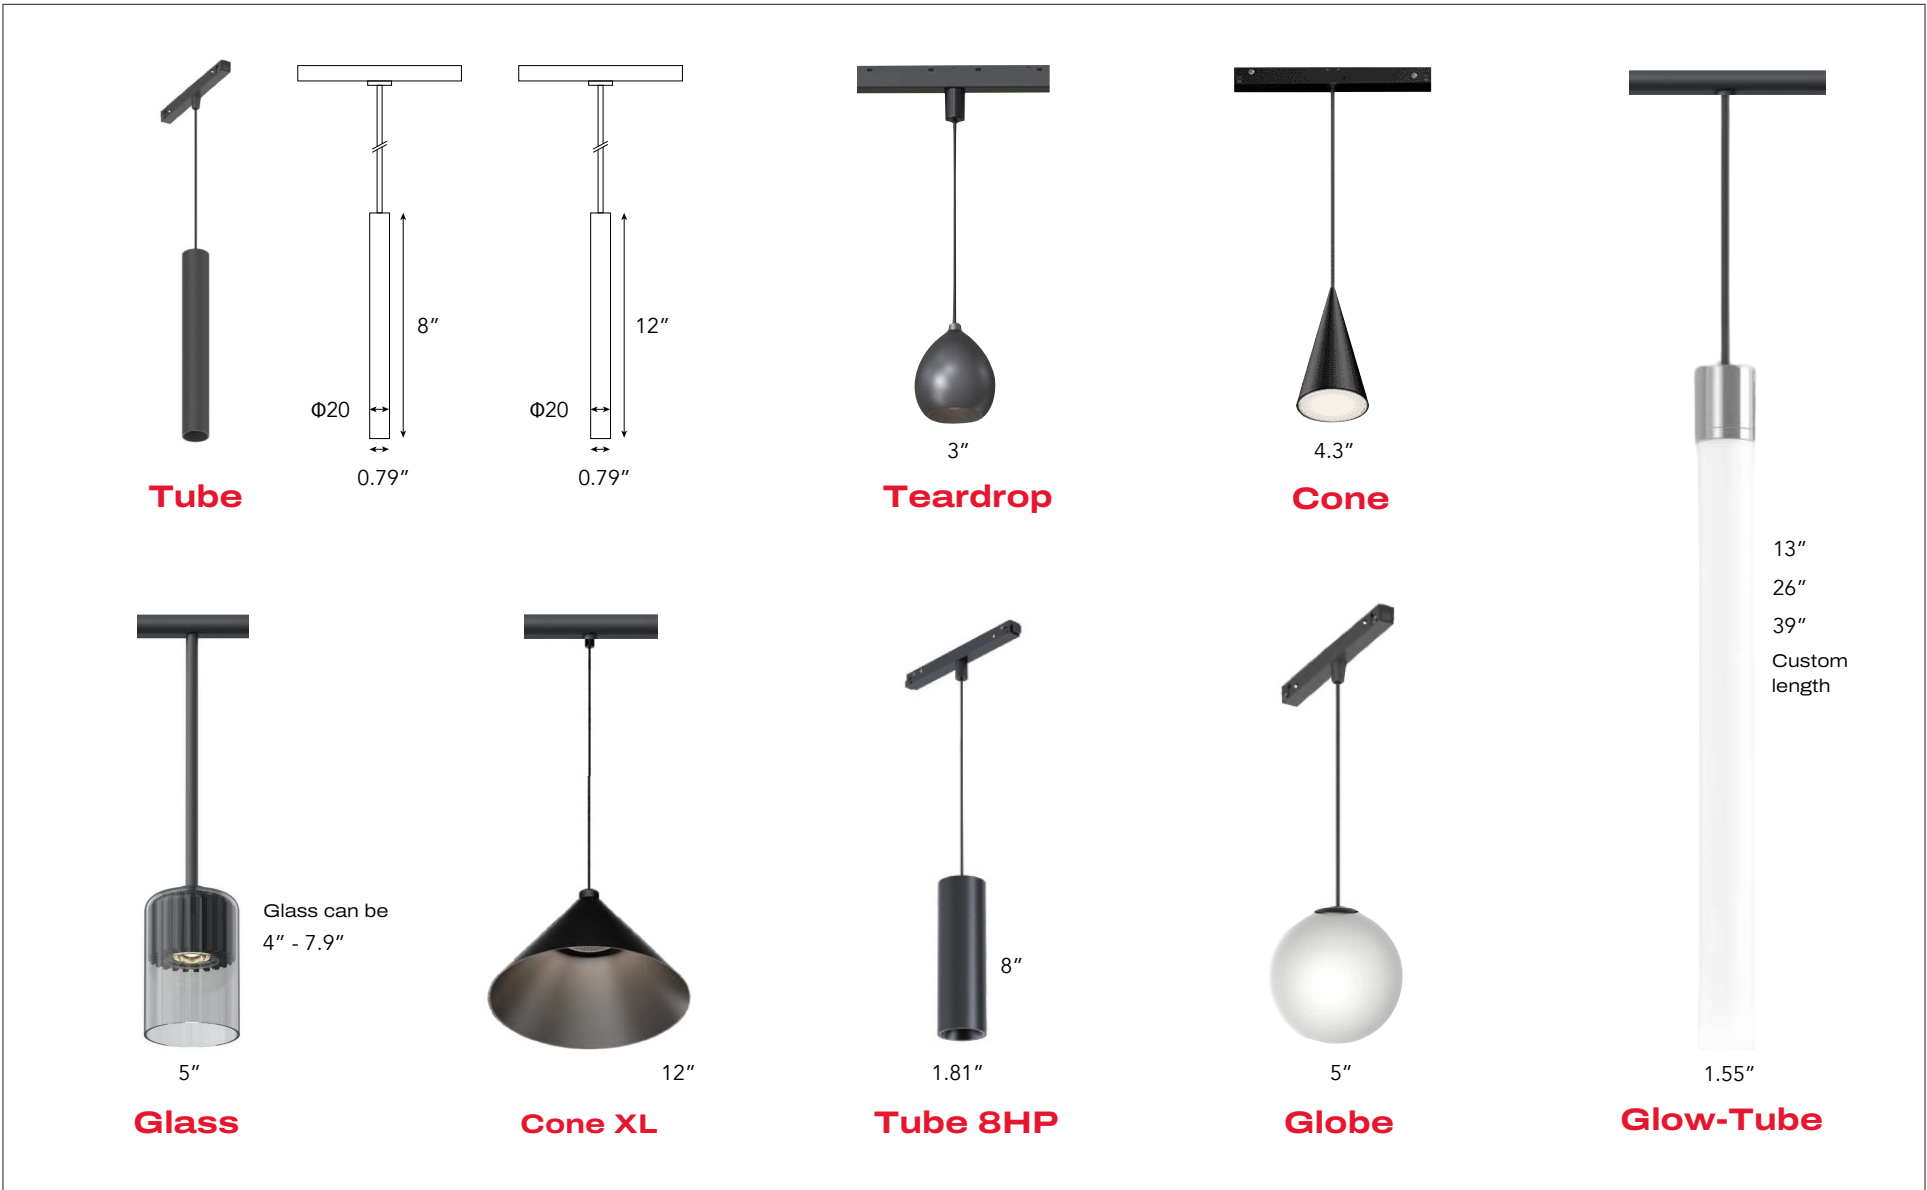

ORDER CODE

ORDER CODE EXAMPLE: TUBE8-48V-80-30K-24D-D10-WH-R

MODEL		VOLTAGE	CRI	CCT	BEAM	DIMMING	FINISH
Tube8	5W (250lm)	48V 48VDC	80 80Ra	27K 2700K	15D 15 Degree	D10 0-10V	WH White
Tube12	5W (250lm)		90 90Ra	30K 3000K	24D 24 Degree	DALI DALI	BK Black
Glow-Tube13	10W (550lm)			35K 3500K	36D 36 Degree	ELV ELV / Phase	CL Clear
Glow-Tube26	20W (1100lm)			40K 4000K	*D Diffused	WLS Wireless / Bluetooth	SM Smokey For 5"Glass Only
Glow-Tube39	25W (1375lm)			TW Tunable White 2700K-6500K			RD Red For 5"Glass Only
Cone	5W (225lm)			WD Warm Dim 3000K-1800K			TL Teal For 5"Glass Only
Teardrop	5W (500lm)						RAL Custom RAL
Globe	10W (650lm)						
Tube8HP	12W (1100lm)						
Glass	15W (1100lm)						
ConeXL	18W (780lm)						

SUSPENSION	LENGTH CABLE
R Rod	XX" inches Specify in
C Cable/Wire	

Project:

Type:


Qty:

DECORATIVE LUMINAIRES




Sun10 Sun20

Sun10 - 3.96"
Sun20 - 5.33"



Sun20P Sun35P

Sun20P - 10"
Sun35P - 17"

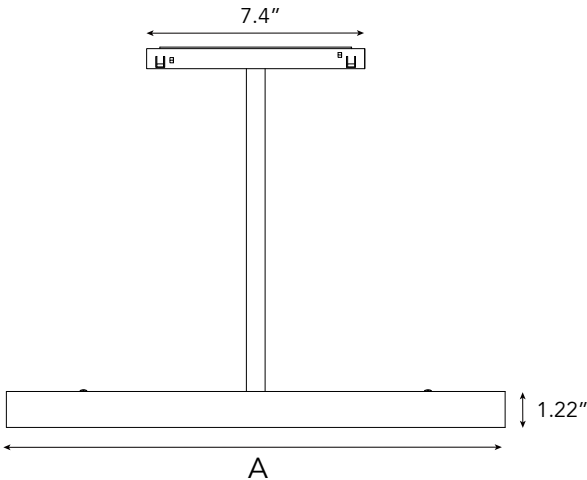

Ceiling Rod Length: 2" / 12" / 15.75" / 27.56" / Custom
Cable / Wire Length: Can be adjusted from 2" to 6'5".
Consult factory for longer lengths.

ORDER CODE

ORDER CODE EXAMPLE: SUN10-48V-80-30K-D10-WH-R

MODEL		VOLTAGE	CRI	CCT		BEAM	DIMMING
Sun10	10W (840lm)	48V 48VDC	80 80Ra	27K	2700K	Leave 110 Degree blank	D10 0-10V
Sun20	20W (1740lm)		90 90Ra	30K	3000K		DALI DALI
Sun20P	20W (1740lm)			35K	3500K		ELV ELV / Phase
Sun35P	35W (2993lm)			40K	4000K		WLS Wireless / Bluetooth
				TW	Tunable White 2700K-6500K		
				WD	Warm Dim 3000K-1800K		

FINISH	SUSPENSION	LENGTH
WH White BK Black GD Gold RAL Custom RAL	R Rod C Cable/Wire	XX" inches Specify in

Project:	Type:	Qty:
----------	-------	------

INSTALLATION

