

Project:

Type:

Qty:



- Suspended lighting system mounted with rigid stems.
- Supports a versatile selection of luminaires within a rounded slim channel design.
- 48VDC magnetic low-voltage architecture ensures clean, reliable performance.
- Silent operation with no buzzing or humming.
- Dimmable to 1% with 0–10V and DALI control.
- 0.1% premium 0–10V dimming, warm dimming, and tunable white options available (consult factory).

Order Code

ORDER CODE EXAMPLE: CATWALK-W-LS-R-W-D10

SERIES	MOUNTING	SHAPE	SUSPENSION	FINISH
CATWALK	C Ceiling for direct mount to ceiling, specify"CD" W Wall	SR Straight Run LS L-Shape US U-Shape SS Square / Rectangle HT Hash Tag Cross	R Rod 2"/ 4"/ 6"/ 12" / 24" / 36" / specify" C Cable/Wire Can adjust up to 6'5"	B Black W White # RAL #

RUN LENGTHS	DIMMING
Straight Run (in feet) _____' Shape (in feet) _____' x _____' x _____' x _____' Hash Tag Cross V: (A)____'(B)____'(C)____' vertical sections H:(D)____'(E)____'(F)____' horizontal sections	D10 0-10V DAL DALI WLS Wireless To control groups of individual luminaires on a single track run, use Dali or Wireless control

Factory will determine required quantities of power supplies, drivers, connectors, corners, and accessories based on the project design. Please provide RCP and detailed drawings showing all runs and connection points for proper configuration.

Refer to Page 3 for power supply ordering information.

Project:

Type:

Qty:

Track

Tubular Magnetic Track



Use indirect lighting tube to create a sleek look with all indirect lighting.



Direct Ceiling Mount (DC)



Wall Mounted



Ceiling Rod Mounted



Project:

Type:

Qty:


Power & Mounting




Connector Tube with power connector.



Rail connector and conductor

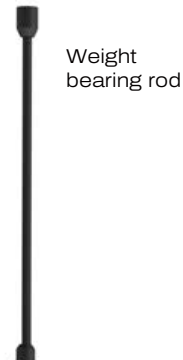

Weight bearing rod

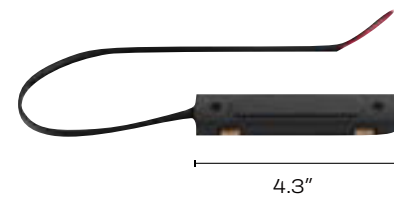


4.3"

Power Box

Electrical connector used for conductive connection between power supply and track.

Connector Tubes and Suspension Rods
Available lengths from 4" - 28"

Mechanical connector and Electrical conductor
Used to connect two tracks together.

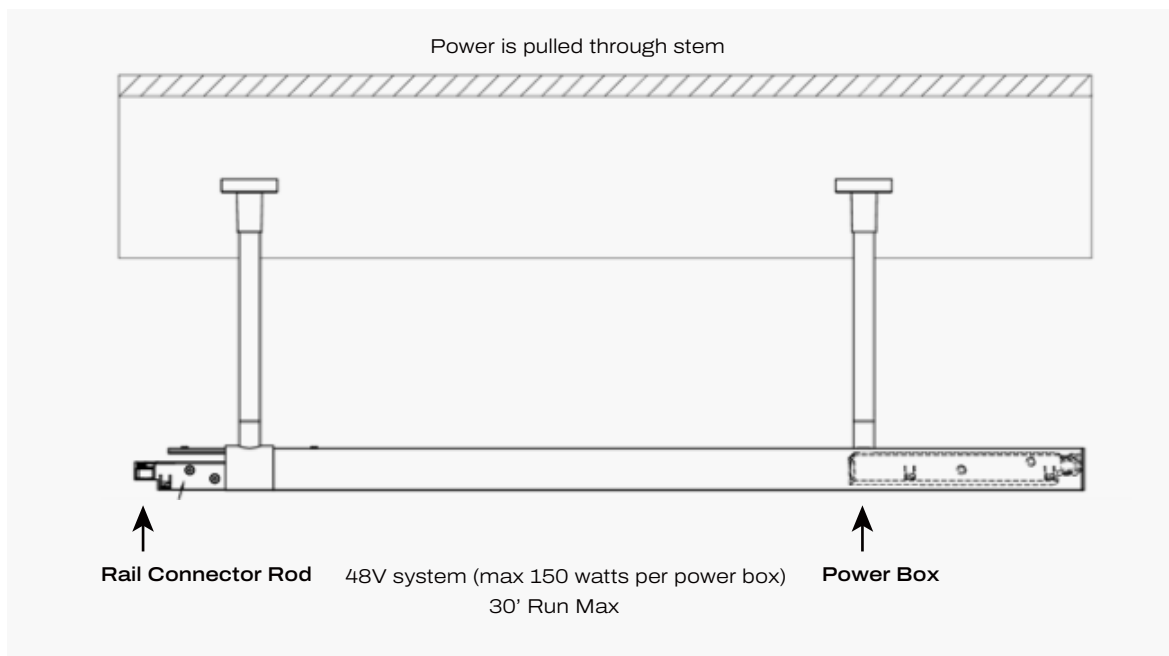

Rail Connector Rod 48V system (max 150 watts per power box)
30' Run Max **Power Box**



Ceiling Driver Box

Decorative driver box installed on the ceiling used to house the power supply. Can be painted to match track system or ceiling.

Power Supply-Order separately

Power Supply Options

60W / 96W / 100W / 150W / 200W / 288W / 300W / 384W available

Order Code:

POWER-**V**W

Example:

POWER-48V100W



Integrated Driver & Dimmer

Available Power: 60W / 96W / 160W

Order Code: SDD-**V**W

Example: SDD-48V60W-DIM




Project:	Type:	Qty:
----------	-------	------

Lighting Modules



ROTATING & MOVABLE



Uplight Bar



See CATWALK luminaire spec sheet for all available lighting modules and details

Corners



Multi-point mount showing inside corner connection