


Project:

Type:

Qty:

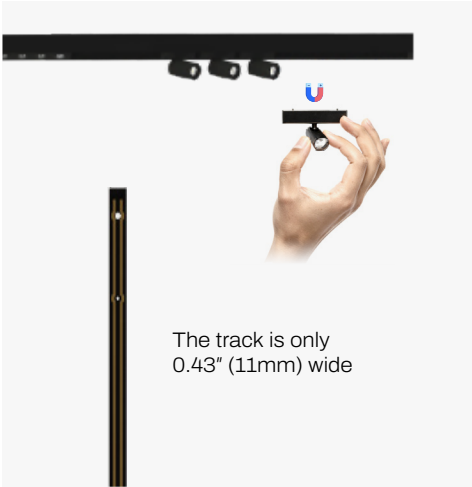

The track is only 0.43" (11mm) wide



FEATURES

ELF is a miniature 48V magnetic track system. Its small size allows it to be installed anywhere.

ELF is perfect for applications such as; retail and jewelry displays, museum exhibition, library cases, wardrobe, wine racks and any place where a discrete profile is desired.

Wide selection of luminaires available (see luminaire spec sheet).

Track is field cuttable.

Available in recessed, surface and suspended mounting options.

Profile is offered in both round and square options.

Track is very versatile, it can be curved, squared, or angled into many shapes.

Order Code

ORDER CODE EXAMPLE: ELF-TT-W-PTR-AC#-SM-WH

| SERIES | FRONT COVER  | APPLICATION                                | SHAPE  | CORNERS  |
|--------|--|--|--|--|
| ELF    | SS1 Slim Square<br>SR2 Slim Round<br>TT Tall Track<br>RC Recessed Slim<br>RT Recessed Tall | C Ceiling<br>W Wall<br>W2C Wall to Ceiling | STR Straight<br>PTR Pattern<br>SQR Square<br>RND Round | RC# Radius Corner<br>AC# Angled Corners<br>Specify the radius or angle of the corner. Leave blank if straight run or a ring. Ex. RC90-90 degree corner |

| MOUNTING                                    | OVERALL LENGTH                            | FINISH  |
|---|---|---|
| SM Stem Mounted<br>AC Suspended w/ Ac Cable | #_ 2" / 4.5" / 12.5"<br>#_ Specify Length | ___" Straight Run<br>___" Diameter<br>___" X ___" X ___" X<br>Square or Pattern<br>Drawings will be required for all pattern runs |
|   |   | BK Black<br>WH White<br>RAL RAL#  |

Specify this section only when incorporating layers into the track design

| LAYERS                            | TRACK  | SHAPE  | CORNERS  | OVERALL LENGTH  | FINISH                           |
|-----------------------------------|--|--|--|---|----------------------------------|
| L2 Second Layer<br>L3 Third Layer | SS1 Slim Square<br>SR2 Slim Round<br>TT Tall Track | STR Slim Square<br>PTR Slim Round<br>SQR Square<br>SQR Round | RC# Radius Corner<br>AC# Angled Corners<br>Specify the radius or angle of the corner. Leave blank if straight run or a ring. Ex. RC90-90 degree corner | ___" Straight Run<br>___" Diameter<br>___" X ___" X ___" X<br>Square or Pattern<br>Drawings will be required for all pattern runs | BK Black<br>WH White<br>RAL RAL# |

Factory will be responsible for determining number of power boxes, drivers, connectors, corners and other accessories needed (based on client's design intent). Please provide RCP and drawings showing full detail of runs.




















Project:

Type:

Qty:

Spot Luminaires

Spots

|  |   |  |   |   |
|--|---|--|---|---|
| <br><br><b>E-13</b> 5W (370LM)    | <br><br><b>E-Z20</b> 3W (180LM)     | <br><br><b>E-Z35</b> 5W (280LM)      | <br><br><b>E-Z55</b> 15W (1055LM)  | <br><br><b>E-20</b> 3W (186LM)      |
| <br><br><b>E-35</b> 5W (440LM) | <br><br><b>E-45</b> 10W (745LM) | <br><br><b>E-55</b> 15W (1186LM) | <br><br><b>E-TR</b> 10W (700LM) | <br><br><b>E-TS</b> 10W (700LM) |

ORDER CODE:

| MODEL                | VOLTAGE   | CRI     | CCT   | BEAM                                | DIMMING   |
|----------------------|-----------|---------|---|-------------------------------------|---|
| ____ Specify Model # | 48V 48VDC | 90 90Ra | 27K 2700K<br>30K 3000K<br>35K 3500K<br>40K 4000K<br>TW Tunable White 2700K-6500K<br>WD Warm Dim 3000K-1800K | Z Zoomable Lens<br>____ 15D/24D/36D | 10 0-10V<br>DALI DALI<br>WLS Wireless / Bluetooth |

| FINISH                                 | ACCESSORY                              |
|--|--|
| WH White<br>BK Black<br>RAL Custom RAL | HC Honeycomb Black<br>LS Linear Spread |

Custom wattages are available  
Tunable White Warm-3000K-1800K  
Tunable White Cool-6000K-3500K

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

info@binacompany.com  
305.735.3114  
www.binacompany.com



|          |       |      |
|----------|-------|------|
| Project: | Type: | Qty: |
|----------|-------|------|

Track

Linear Baffle

**SS1**  
Square Slim Track  
- Surface & Pendant Mount



**RC**  
Slim Track  
- Recessed



**SR2**  
Round Slim Track  
- Surface & Pendant Mount



**RT**  
Tall Track Recessed



**TT**  
Tall Track - Surface & Pendant Mount



Rings and Radius Corners

For rings and radius corners, specify radius or diameter.



Project:

Type:

Qty:

Luminaires

|                                   |                                   |                                   |                                   |
|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| <br><br><b>E-F10</b> 10W (600LM)  | <br><br><b>E-F15</b> 15W (900LM)  | <br><br><b>E-G10</b> 10W (600LM)  | <br><br><b>E-G15</b> 15W (900LM)  |
| <br><br><b>E-FF10</b> 10W (600LM) | <br><br><b>E-FF15</b> 15W (900LM) | <br><br><b>E-FG10</b> 10W (600LM) | <br><br><b>E-FG15</b> 15W (900LM) |

ORDER CODE:

| MODEL                | VOLTAGE   | CRI     | CCT   | BEAM                        | DIMMING   | FINISH                           |
|----------------------|-----------|---------|---|-----------------------------|---|----------------------------------|
| ____ Specify Model # | 48V 48VDC | 90 90Ra | 27K 2700K<br>30K 3000K<br>35K 3500K<br>40K 4000K<br>TW Tunable White 2700K-6500K<br>WD Warm Dim 3000K-1800K | ____ 20D/30D (Eclipse Only) | 10 0-10V<br>DALI DALI<br>WLS Wireless / Bluetooth | WH White<br>BK Black<br>RAL RAL# |

Project:



Type:

Qty:

Specialty Luminaires



Eclipse 5W (200LM)

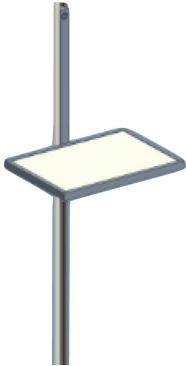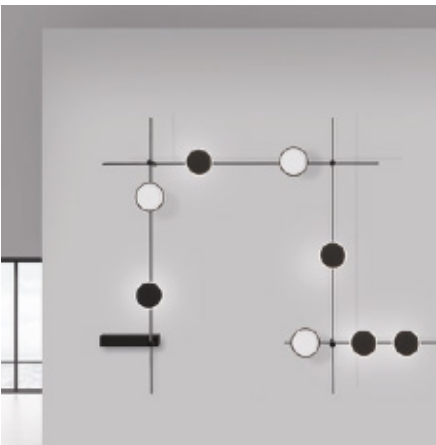

Display 15W (900LM)





ORDER CODE:

| MODEL                | VOLTAGE   | CRI     | CCT   | BEAM                        | DIMMING   | FINISH                           |
|----------------------|-----------|---------|---|-----------------------------|---|----------------------------------|
| ____ Specify Model # | 48V 48VDC | 90 90Ra | 27K 2700K<br>30K 3000K<br>35K 3500K<br>40K 4000K<br>TW Tunable White 2700K-6500K<br>WD Warm Dim 3000K-1800K | ____ 20D/30D (Eclipse Only) | 10 0-10V<br>DALI DALI<br>WLS Wireless / Bluetooth | WH White<br>BK Black<br>RAL RAL# |


Connectors

Corner connectors


2/3/4 Way Connector

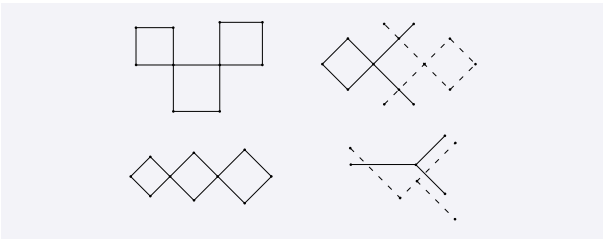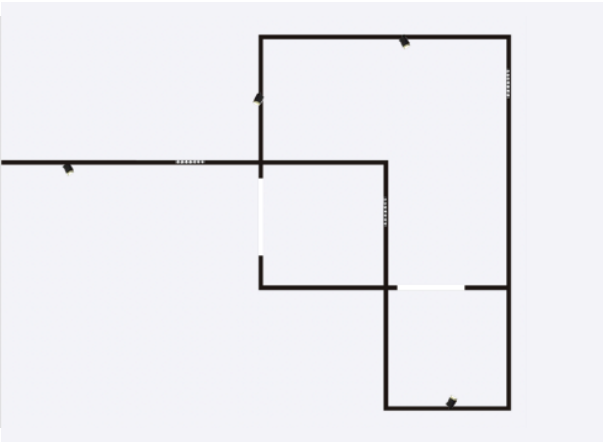

Corners - recessed

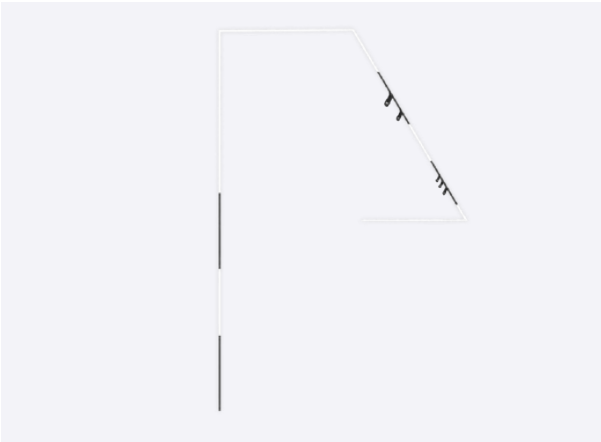

Level connector

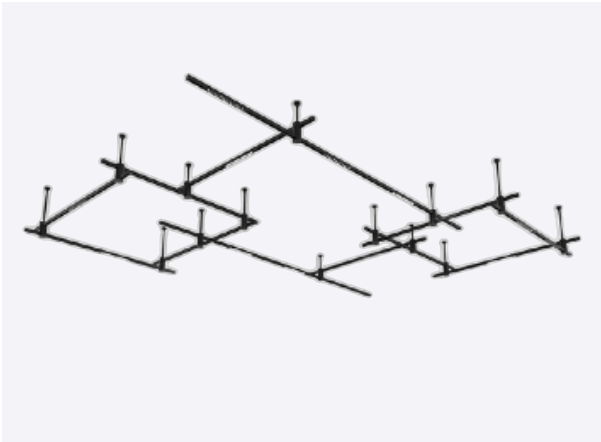

All power, mounting, connectors and accessories for proper assembly will be determined by the factory.

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

info@binacompany.com  
305.735.3114  
www.binacompany.com

