

Project:

Type:

Qty:

Luminaire Selection

Glass Shade Lamps



5.3"

4.7"

E-GL4C



6"

3.3"

E-GL3B



All lamps can be in up or down position



5.4"

3.9"

E-GL4G



5.4"


3.9"

E-GL4IG



4" / 4.7" / 5.9" Marble

E-GL4GM/E-GL5GM/E-GL6GM



All Glass Shade Lamps can be installed on the top, bottom or both sides of the track.



6.5"

2"

E-GL2T



6.5"

2"

E-GL2ST



10.4"

2"

E-GL2DB



ORDER CODE

ORDER CODE EXAMPLE: EGL2T-48V-90-30K-ELV-BK

MODEL		VOLTAGE	CRI		CCT		DIMMING		FINISH	
E-GL4C	5W (215lm)	48V 48VDC	80	80Ra	27K	2700K	ELV	ELV	GD	Rose Gold
E-GL3B	5W (215lm)		90	90Ra	30K	3000K	DALI	DALI	PG	Pale Gold
E-GL4G	5W (215lm)				35K	3500K	D10	0-10V	AG	Antique Gold
E-GL4IG	5W (157lm)				40K	4000K			BK	Black
E-GL2T	5W (215lm)				TW	Tunable White 2700K-6500K			SV	Silver
E-GL4GM	5W (157lm)				WD	Warm Dim 3000K-1800K				
E-GL5GM	8W (251lm)									
E-GL6GM	10W (314lm)									
E-GL2ST	5W (215lm)									
E-GL2DB	8W (400lm)									

Factory will determine required quantities of power supplies, drivers, connectors, corners, and accessories based on the project design. Please provide RCP and detailed drawings showing all runs and connection points for proper configuration. Refer to Page 6 for power supply ordering information.

In an effort to offer the best product possible, we reserve the right to change product specifications or materials without notice.

info@binacompany.com
 305.735.3114
 www.binacompany.com




Project:

Type:

Qty:


Luminaire Selection

Adjustable Luminaires



4"
6.2"
1.8"

0°-355° Horizontal Rotation
0°-90° Vertical Aiming Tilt




Rotating & Adjustable



4"



Rotating & Adjustable



6"



6"



4"



11"
6"

E-S10

E-SUN4

E-SUN6

E-Eclipse6

E-Eclipse4

E-SUN6A

ORDER CODE

ORDER CODE EXAMPLE: ES10-48V-90-30K-24D-ELV-SV-HC

MODEL		VOLTAGE	CRI		CCT		BEAM			
							Beam		Sun	
E-S10	10W (952lm)	48V 48VDC	80	80Ra	27K	2700K	20D	20 Degree	—	Leave Blank
E-SUN4	10W (509lm)		90	90Ra	30K	3000K	24D	24 Degree		
E-SUN6	15W (1100lm)				35K	3500K	36D	36 Degree		
E-SUN6A	15W (1100lm)				40K	4000K				
E-Eclipse6	6W (300lm)				TW	Tunable White 2700K-6500K				
E-Eclipse4	3W (150lm)				WD	Warm Dim 3000K-1800K				
DIMMING		FINISH		ACCESSORY E-S10 ONLY						
ELV	ELV	GD	Rose Gold	HC	Honeycomb					
DALI	DALI	PG	Pale Gold	LS	Linear Spread					
D10	0-10V	AG	Antique Gold							
		BK	Black							
		SV	Silver							


Project:

Type:

Qty:

Luminaire Selection

Spotlight

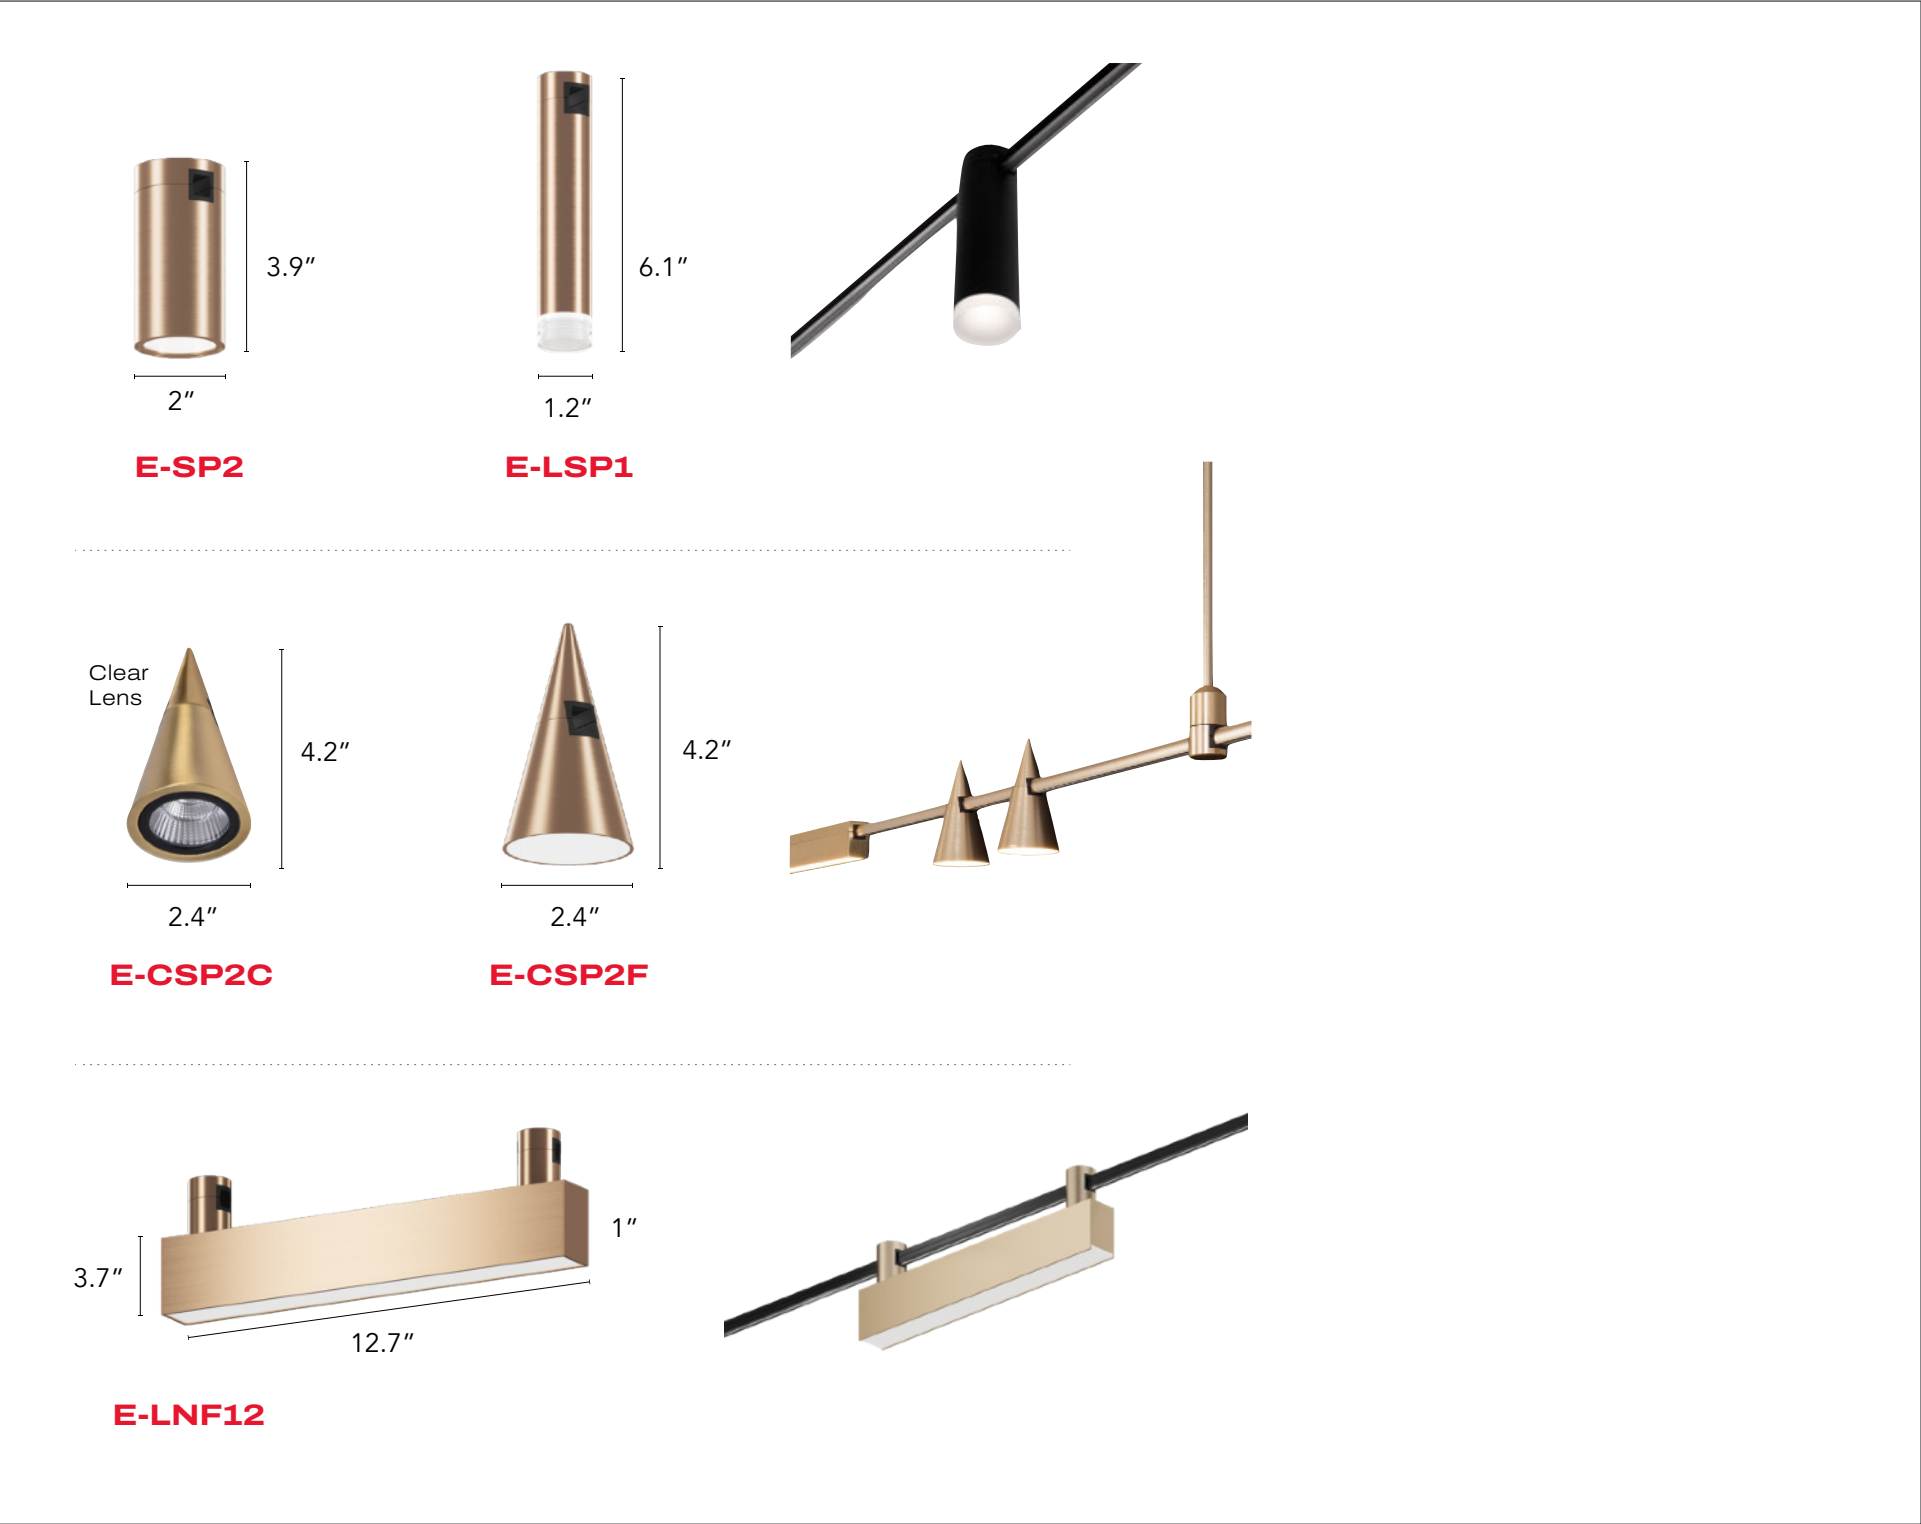

ORDER CODE

ORDER CODE EXAMPLE: ELSP1-48V-90-30K-38D-ELV-BK

MODEL	VOLTAGE	CRI	CCT	BEAM	DIMMING	FINISH
E-SP2 10W (591lm)	48V 48VDC	80 80Ra	27K 2700K	13D 13 Degree	ELV ELV	GD Rose Gold
E-LSP1 5W (180lm)		90 90Ra	30K 3000K	25D 25 Degree	DALI DALI	PG Pale Gold
E-CSP2 6W (748lm)			35K 3500K	38D 38 Degree	D10 0-10V	AG Antique Gold
CE-CSP2 6W (316lm)			40K 4000K	E-CSP2S ONLY ALL OTHERS LEAVE BLANK		BK Black
FE-LNF12 10W (557lm)			TW Tunable White 2700K-6500K			SV Silver
			WD Warm Dim 3000K-1800K			

Project:

Type:

Qty:

Luminaire Selection

Stem Pendants



ORDER CODE

ORDER CODE EXAMPLE: EPS25-48V-90-30K-ELV-GD

MODEL	VOLTAGE	CRI	CCT	DIMMING	FINISH
E-PS25 10W (600lm)	48V 48VDC	80 80Ra	27K 2700K	ELV ELV	GD Rose Gold
E-BR30 20W (1200lm)		90 90Ra	30K 3000K	DALI DALI	PG Pale Gold
E-BT28 30W (1800lm)			35K 3500K	D10 0-10V	
E-BF10 40W (2400lm)			40K 4000K		
E-BFO4 12W (600lm)			TW Tunable White 2700K-6500K		
			WD Warm Dim 3000K-1800K		


Project:

Type:

Qty:

Luminaire Selection

Cable Pendants

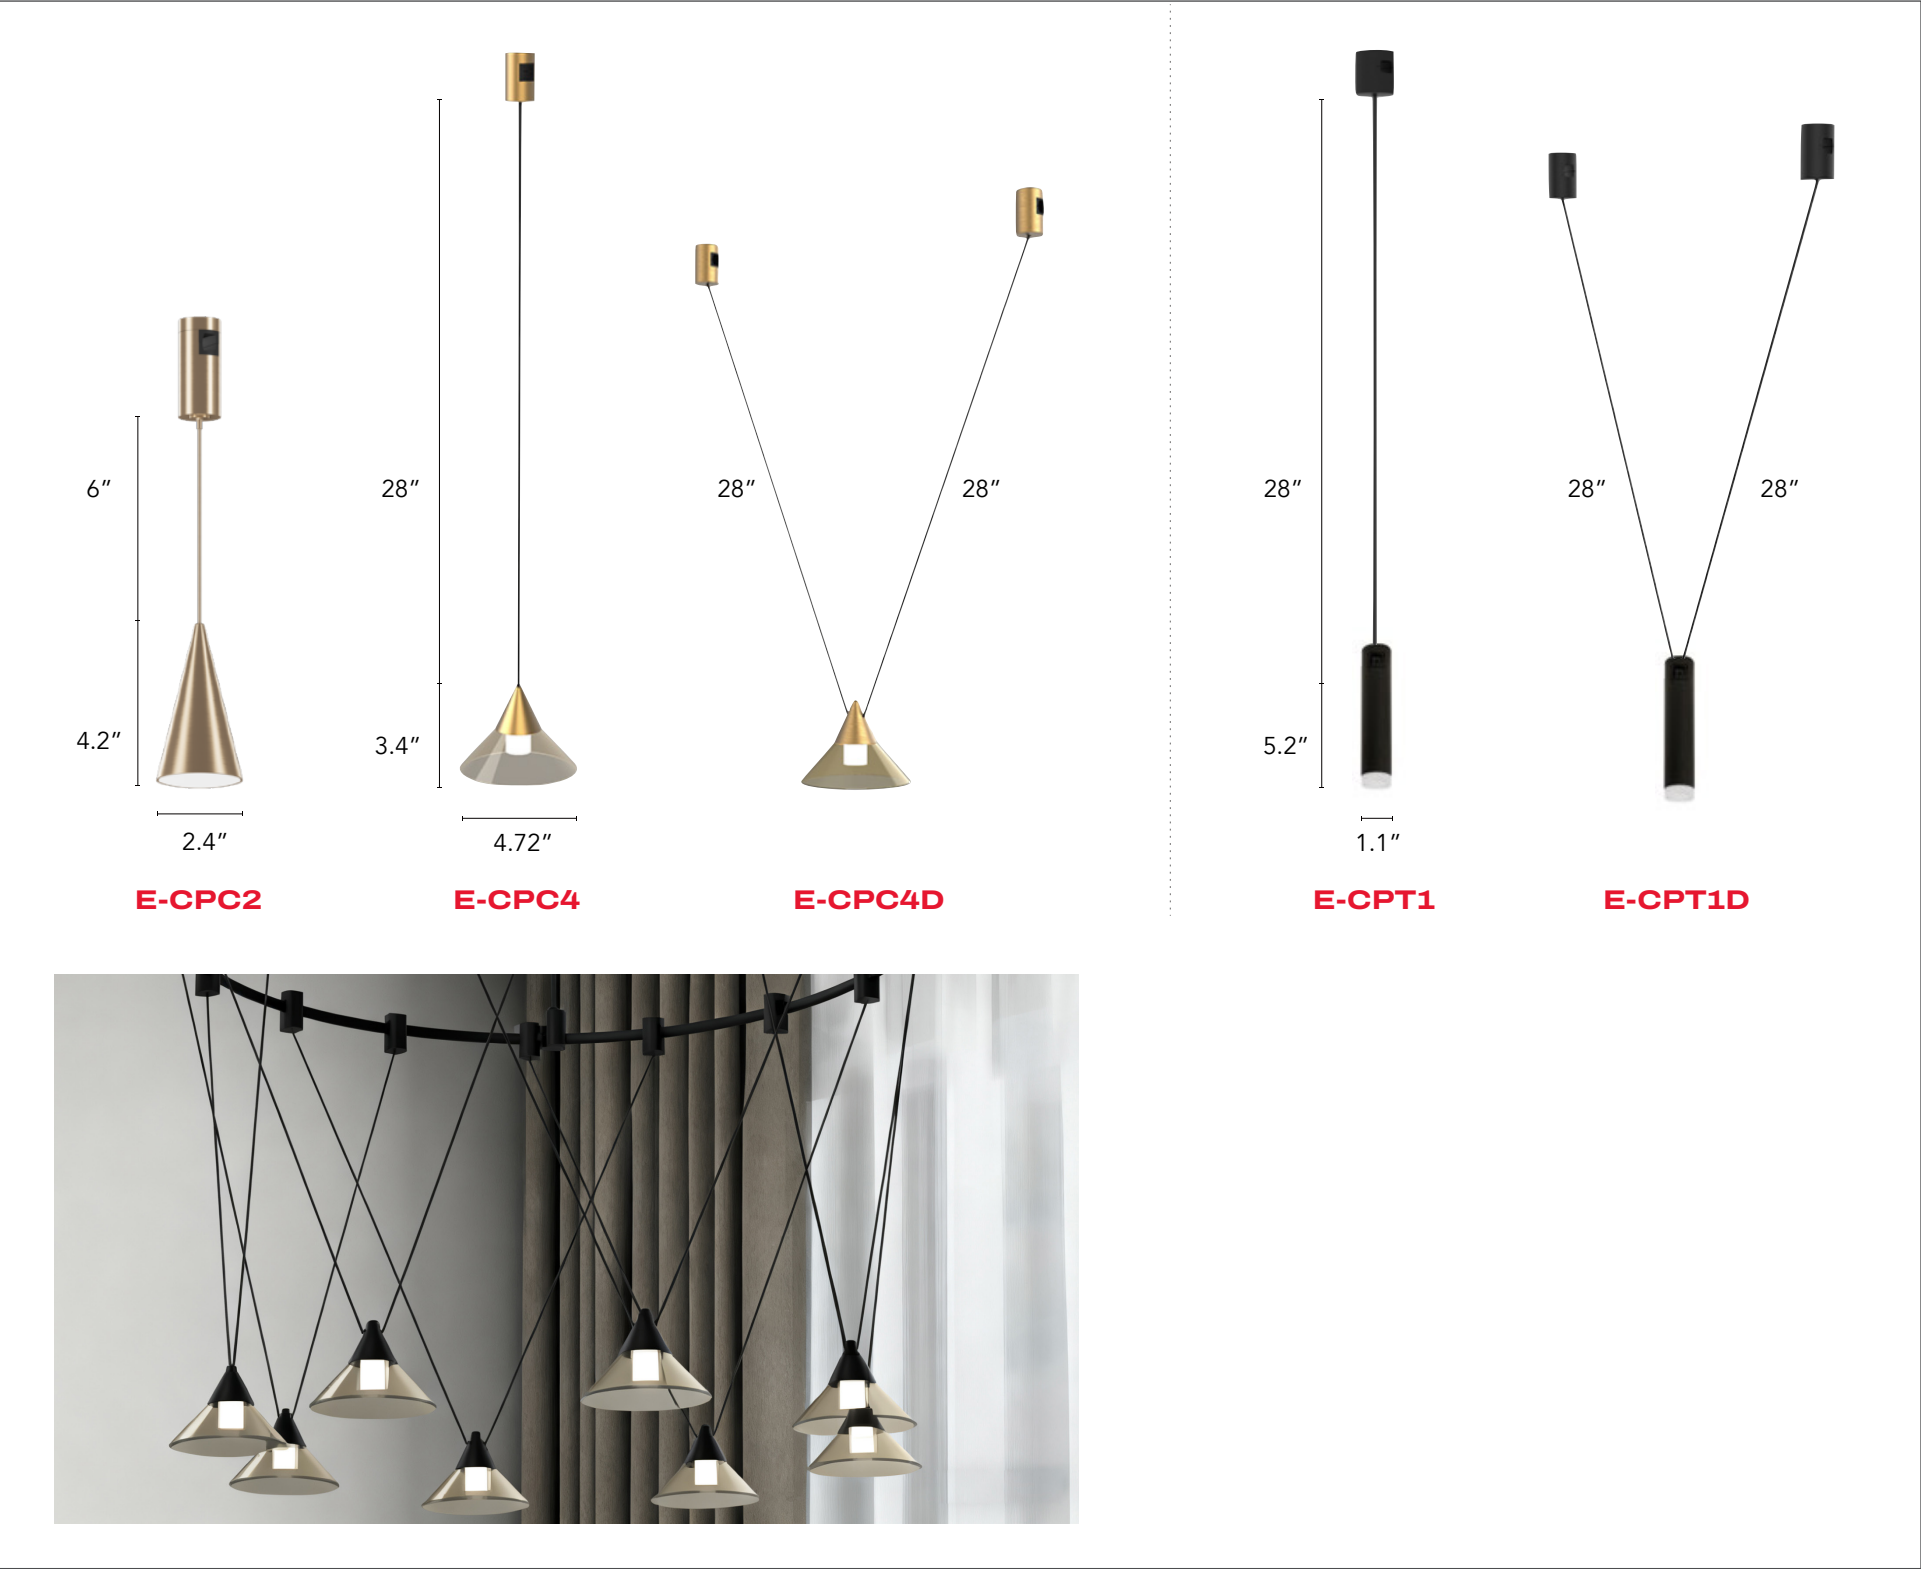

ORDER CODE

ORDER CODE EXAMPLE: ECPC2-48V-90-30K-ELV-GD


MODEL	VOLTAGE	CRI	CCT	DIMMING	FINISH
E-CPC2 5W (300lm)	48V 48VDC	80 80Ra	27K 2700K	ELV ELV	GD Rose Gold
E-CPC4 5W (300lm)		90 90Ra	30K 3000K	DALI DALI	PG Pale Gold
E-CPC4D 5W (300lm)			35K 3500K	D10 0-10V	
E-CPT1 5W (300lm)			40K 4000K		
E-CPT1D 5W (300lm)			TW Tunable White 2700K-6500K		
			WD Warm Dim 3000K-1800K		

Project:

Type:

Qty:

Installation Instructions

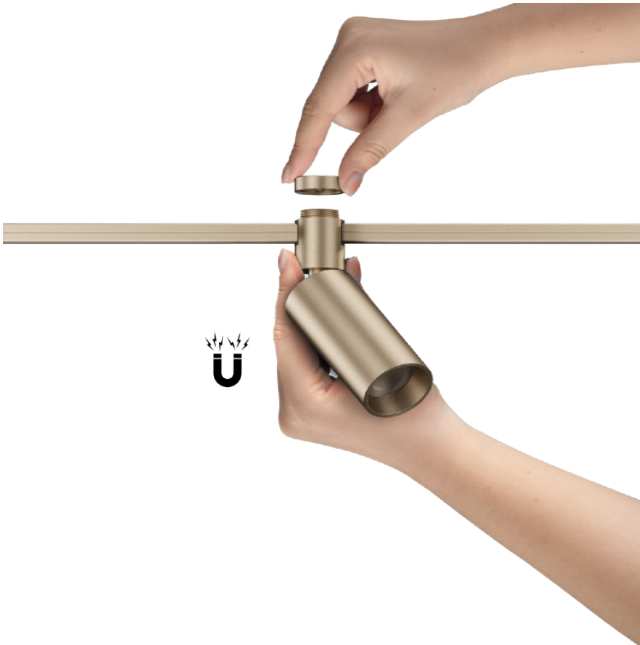

Power Supply-Order separately

Power Supply Options
60W / 96W / 100W / 150W / 200W / 288W / 300W / 384W available
Order Code:
POWER-**V**W
Example:
POWER-48V100W



Integrated Driver & Dimmer
Available Power: 60W / 96W / 160W
Order Code: SDD-**V**W
Example: SDD-48V60W-DIM

