## **Groundhog Series**


# Adjustable Inground



Project: Type: Qty:

#### **INSTALLATION INSTRUCTIONS**


#### STEP 1 ▶



Place the embedded bucket into the hole, ensuring it is level with the ground. The power cord should pass through the embedded bucket.


Note: The gravel thickness must be greater than  $0.98^{\prime\prime}$  inches.

#### STEP 2 ▶




Thread one end of the power cord and the lamp power cord into the waterproof connector (IP68). Connect the power cords, then securely fasten the waterproof connector, ensuring sufficient length for easy maintenance.

#### STEP 3 ▶




By turning the angle knob left or right, different angles can be achieved (0° to 30°).

#### STEP 4 ▶



Place the long power cord in the pre embeddedbucket, then place the light fixture into the preembedded bucket and tighten the screw.


#### **CONNECTION DIAGRAM**

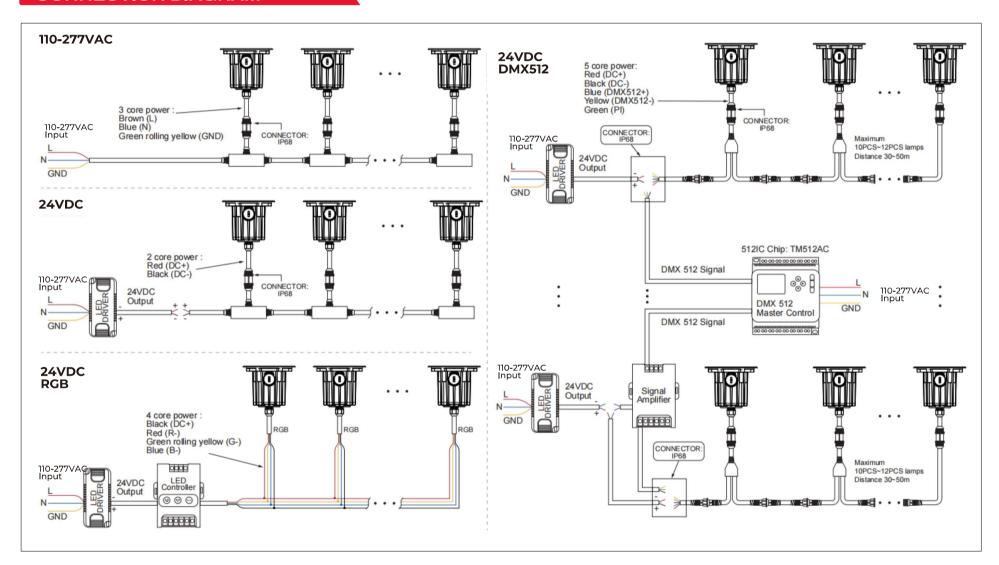

### SAFETY INSTRUCTIONS BEFORE INSTALLATION

- ${}^{\star} \textbf{Installation must} \ \textbf{be carried out by a qualified technician or authorized professional}.$
- \* Always disconnect power before installation to prevent the risk of electric shock
- ${}^\star\textsc{Ensure}$  adequate ventilation space around the LED heat sink to allow proper cooling.
- \*Only connect LED luminaires using the recommended drivers.
- $\ensuremath{^*}$  The actual product may vary slightly from the illustrations shown.
- \*Do not attempt to disassemble the product.
- \* Any damage caused by modifications or improper installation will void the warranty.





⊕ www.binacompany.com





In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.