



INSTALLATION INSTRUCTIONS

STEP 1 ▶




Fix the embedded components, keeping them flush with the wall. Ensure the power cord passes through the embedded bucket.
Note:
The gravel layer must be at least 10 inches high.

STEP 2 ▶




Make the electrical connection between the power cord and the lamp power cord, wrap with insulating tape, and ensure adequate slack for future maintenance.

STEP 3 ▶




Insert the long power cord into the pre-embedded bucket.

STEP 4 ▶



Insert the light fixture securely into the pre-embedded bucket.

CONNECTION DIAGRAM

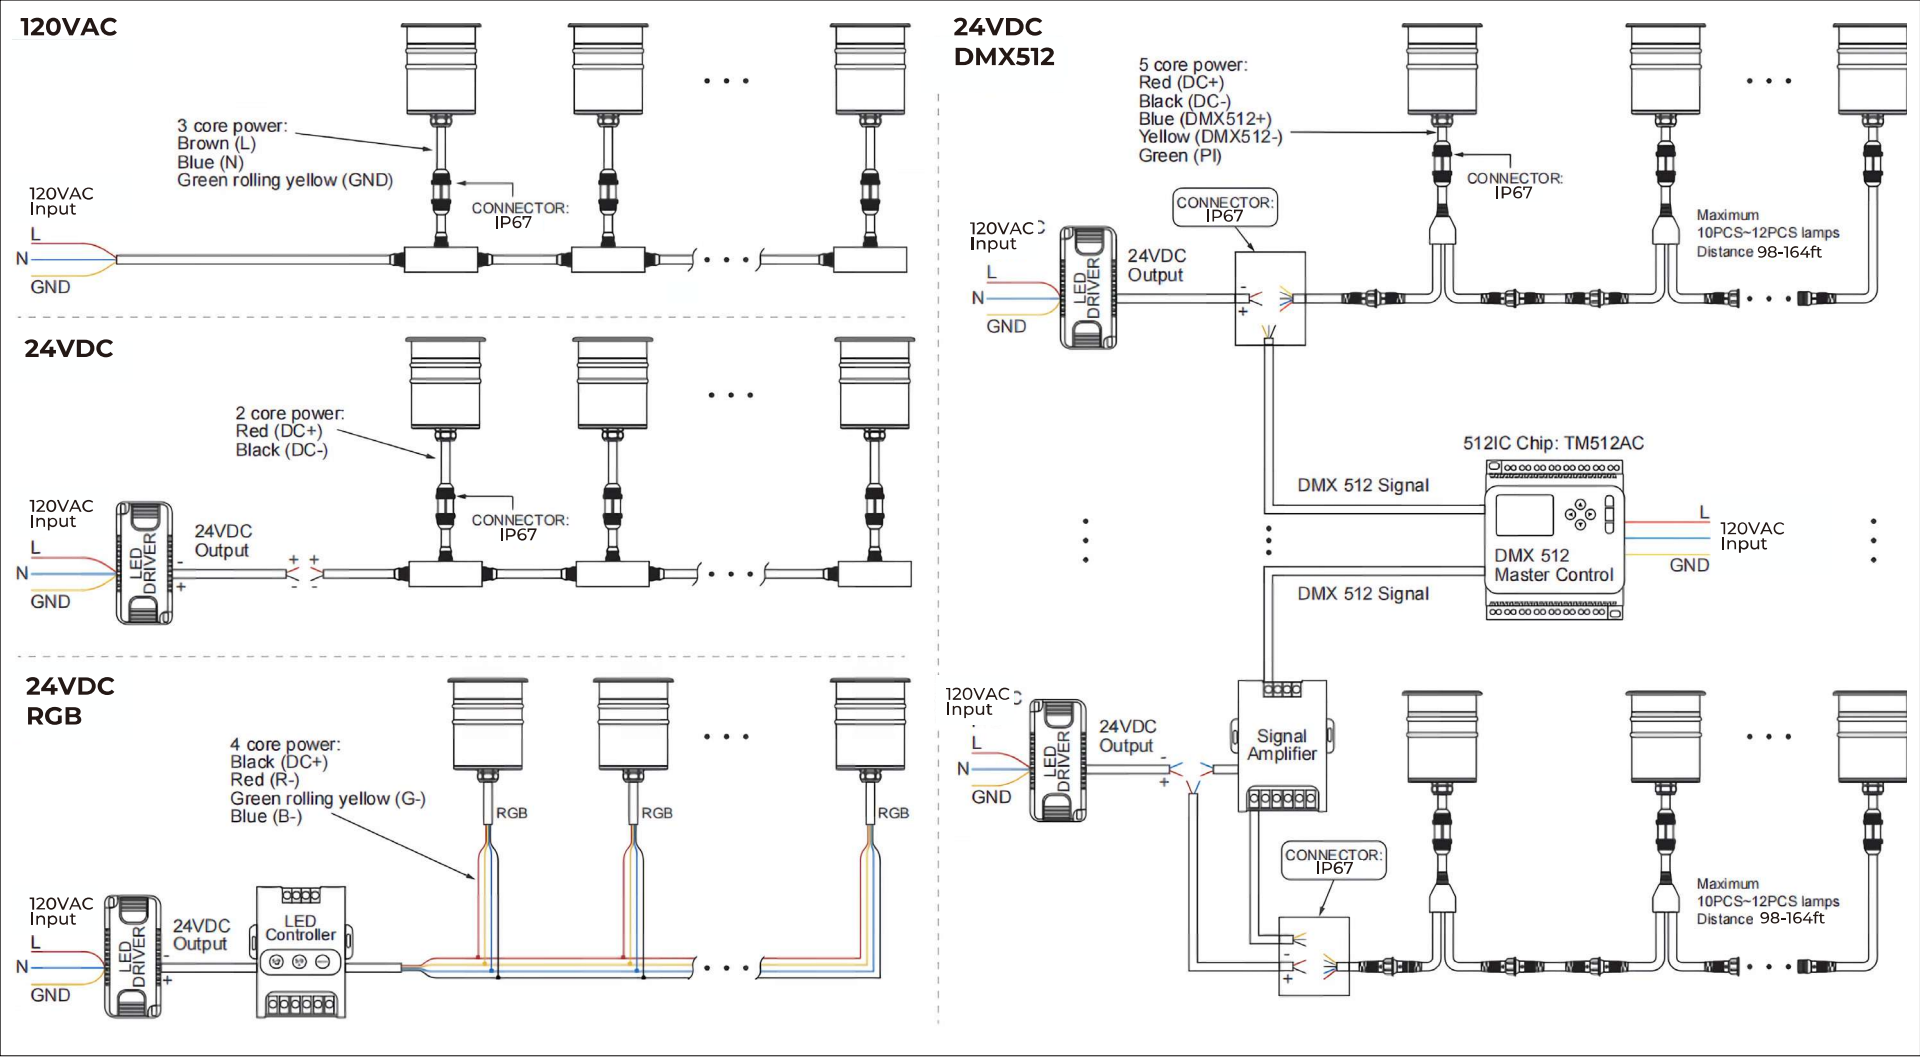

SAFETY INSTRUCTIONS BEFORE INSTALLATION

- Installation must be carried out by a qualified technician or authorized professional.
- Always disconnect power before installation to prevent the risk of electric shock.
- Ensure adequate ventilation space around the LED heat sink to allow proper cooling.
- Only connect LED luminaires using the recommended drivers.
- The actual product may vary slightly from the illustrations shown.
- Do not attempt to disassemble the product.
- Any damage caused by modifications or improper installation will void the warranty.



In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

✉ info@binacompany.com
☎ 305.735.3114
🌐 www.binacompany.com

