

Project:	Type:	Qty:
----------	-------	------



Illuminate the space with raw elegance. Inspired by Béton Brut, the BRUT collection embraces the beauty of raw concrete with sleek, modern sophistication.

is an industrial-chic cement outdoor surface mount cylinder featuring a brushed stainless steel reflector.

comes in 4 concrete finish options or can be powder coated to any RAL#.


Offered in 9W, 18W and 26W power options.

IP65 rated for outdoor installation.

SPECIFICATIONS



Square

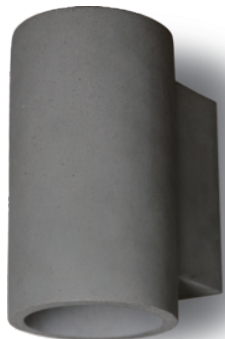

Round


Input Voltage	120V-277V
Wattage	5.3W-12W
Delivered Lumens	580LM - 950LM
CCT	2700K, 3000K, 3500K, 4000K
Material	Cement /Die-cast aluminum lighting module
IK Rating	IK06
Dimming	Phase & 0-10v (100%-5%)
Lamp Life	50,000Hr
Environment	IP65 / cable gland IP67
Operating Temp	-4° F - 104° F

ORDER CODE


ORDER CODE EXAMPLE:BRUT-WRD-90DN-35k-24D-D10-SS

SERIES	SHAPE	SIZE WATTAGE	CCT	BEAM	DIMMING	FINISH
BRUT	WRD Wall mount round	110DN 4.3"*5W	27K 2700K	Leave Blank	D10 0-10V	CG Concrete Grey ST Silver Travertine
	WSD Wall mount square	110UD 4.3"*10W	30K 3000K	Offered onlyin 36D	DTR Triac/Phase	TC Terracotta TB Travertine Beige
		90DN 3.5"*6W	35K 3500K	15D		SS Sandstone LS Limestone
		90UD 3.5"*12W	40K 4000K	24D		EB Emperador Brown NB Nero Black
						BS Basalt CR Carrara


CONCRETE FINISHES




CONCRETE GREY




TERRACOTTA




SANDSTONE




EMPERADOR BROWN




BASALT




SILVER TRAVERTINE



TRAVERTINE BEIGE



LIMESTONE






NERO BLACK



CARRARA





SPECIFICATIONS

CWR-110DN5W






5.3W - 580LM

CWR-110UD10

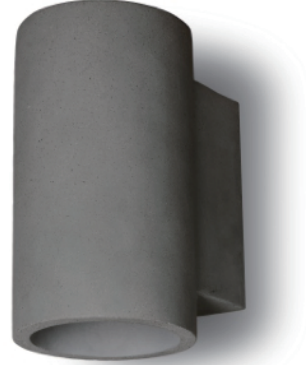




10.2W - 720LM

CWS-110DN5W



5.3W - 585LM

CWS-110UD10



10.2W - 725LM


Project:

Type:



Qty:

SPECIFICATIONS

CWR-90DN6W




6W - 610LM
15°/24°


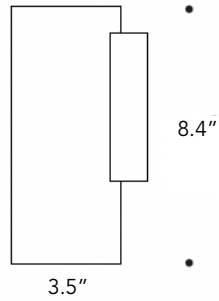


3.5"


CWR-90UD12W






12W - 951LM
15°/24°

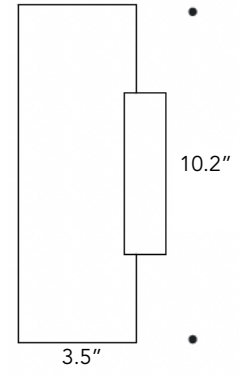

CWS-90DN6W




6W - 610LM
15°/24°

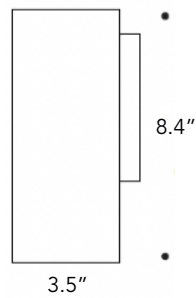

3.5"

CWS-90UD12W



12W - 951LM
15°/24°

