

Project:	Type:	Qty:
----------	-------	------



Illuminate the space with raw elegance. Inspired by Béton Brut, the BRUT collection embraces the beauty of raw concrete with sleek, modern sophistication.

is an industrial-chic cement outdoor surface mount cylinder featuring a brushed stainless steel reflector.

comes in 4 concrete finish options or can be powder coated to any RAL#.

Offered in 9W, 18W and 26W power options.

IP65 rated for outdoor installation.

### SPECIFICATIONS



Square



Round

Input Voltage	120V-277V
Wattage	5.3W-12W
Delivered Lumens	580LM - 950LM
CCT	2700K, 3000K, 3500K, 4000K
Material	Cement /Die-cast aluminum lighting module
IK Rating	IK06
Dimming	Phase & 0-10v (100%-5%)
Lamp Life	50,000Hr
Environment	IP65 / cable gland IP67
Operating Temp	-4° F - 104° F

### ORDER CODE

ORDER CODE EXAMPLE:BRUT-WRD-90DN-35k-24D-D10-PS12

SERIES	SHAPE	SIZE WATTAGE	CCT	BEAM	DIMMING	FINISH
BRUT	WRD Wall mount round	110DN 4.3"*5W	27K 2700K	Leave Blank	D10 0-10V	PS12 Pepper Sand
	WSD Wall mount square	110UD 4.3"*10W	30K 3000K	Offered only in 36D	DTR Triac/Phase	SG13 Starling Grey
		90DN 3.5"*6W	35K 3500K	15D		NS18 Natural Stone
		90UD 3.5"*12W	40K 4000K	24D		EB04 Slat Earth Brown
						RAL# RAL Finish

### CONCRETE FINISHES


PEPPER SAND (12)



STARLING GREY (13)



NATURAL STONE (18)

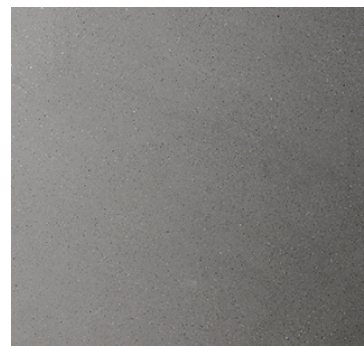

SLAT EARTH BROWN (04)






## Wall Cylinder

Project: Type: Qty:





### SPECIFICATIONS

**CWR-110DN5W**






5.3W - 580LM

**CWR-110UD10**

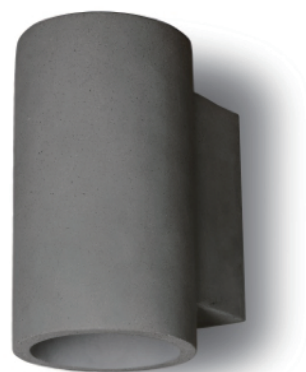




10.2W - 720LM

**CWS-110DN5W**





















5.3W - 585LM

**CWS-110UD10**



10.2W - 725LM

### SPECIFICATIONS

<p><b>CWR-90DN6W</b></p>   <p>6W - 610LM 15°/24°</p>  <p>8.4"</p> <p>3.5"</p>  <p>4.4"</p>  <p>3.5"</p>	<p><b>CWR-90UD12W</b></p>   <p>12W - 951LM 15°/24°</p>  <p>10.2"</p> <p>3.5"</p>  <p>4.4"</p>
<p><b>CWS-90DN6W</b></p>   <p>6W - 610LM 15°/24°</p>  <p>8.4"</p> <p>3.5"</p>  <p>4.4"</p>  <p>3.5"</p>	<p><b>CWS-90UD12W</b></p>   <p>12W - 951LM 15°/24°</p>  <p>10.2"</p> <p>3.5"</p>  <p>4.4"</p>