

BRUT

Wall Cylinder

Project:

Type:

Qty:




Illuminate the space with raw elegance. Inspired by Béton Brut, the BRUT collection embraces the beauty of raw concrete with sleek, modern sophistication.

An industrial-chic outdoor surface-mount luminaire, available in round and square forms, featuring a brushed stainless steel reflector.

Available in 10 distinctive concrete and stone-inspired finishes, with custom RAL powder-coated colors available upon request.

IP65 rated for outdoor installation.

SPECIFICATIONS



Square



Round


Input Voltage	120V-277V
Wattage	5.3W-12W
Delivered Lumens	580LM - 951LM
CCT	2700K, 3000K, 3500K, 4000K
Material	Cement /Die-cast aluminum lighting module
IK Rating	IK06
Dimming	Phase & 0-10V (100%-5%)
Lamp Life	50,000Hr
Environment	IP65 / cable gland IP67
Operating Temp	-4° F to 104° F

ORDER CODE


ORDER CODE EXAMPLE: BRUT-WRD-90DN-35K-24D-D10-SS

SERIES	SHAPE	SIZE	WATTAGE	CCT	BEAM	DIMMING	FINISH
BRUT	WRD Wall mount round	110DN	4.3"*5W	27K	2700K	Leave Blank	CG Concrete Grey
	WSD Wall mount square	110UD	4.3"*10W	30K	3000K	Offered only in 36D	ST Silver Travertine
		90DN	3.5"*6W	35K	3500K	15D	TC Terracotta
		90UD	3.5"*12W	40K	4000K	24D	TB Travertine Beige
							SS Sandstone
							LS Limestone
							EB Emperador Brown
							NB Nero Black
							BS Basalt
							CR Carrara

CONCRETE & STONE FINISHES




CONCRETE GREY




TERRACOTTA




SANDSTONE



EMPERADOR BROWN



BASALT




SILVER TRAVERTINE



TRAVERTINE BEIGE



LIMESTONE



NERO BLACK



CARRARA

In an effort to offer the best product possible, we reserve the right to change product specifications or materials without notice.

✉ info@binacompany.com

☎ 305.735.3114

🌐 www.binacompany.com















Project:

Type:

Qty:

SPECIFICATIONS
















CWR-110DN5W  5.3W - 580LM	CWR-110UD10W  10.2W - 720LM
CWS-110DN5W  5.3W - 585LM	CWS-110UD10W  10.2W - 725LM

Project:

Type:

Qty:

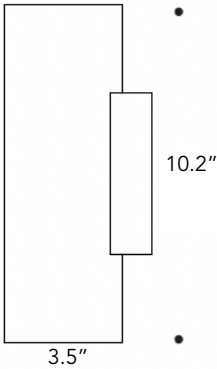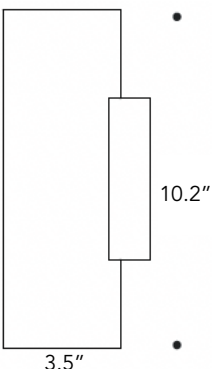SPECIFICATIONS

CWR-90DN6W  6W - 610LM 15°/24° 3.5" 8.4" 3.5" 4.4"	CWR-90UD12W  12W - 951LM 15°/24° 3.5" 10.2" 3.5" 4.4"
CWS-90DN6W  6W - 610LM 15°/24° 3.5" 8.4" 3.5" 4.4"	CWS-90UD12W  12W - 951LM 15°/24° 3.5" 10.2" 3.5" 4.4"