

Project:

Type:

Qty:



FEATURES

Architectural Circular Luminaire

A contemporary architectural ring luminaire designed for large-scale commercial and decorative applications.

Featuring a substantial 4" x 4" profile, the CIRVOLA series delivers a clean, balanced architectural presence while providing soft, uniform illumination.

Available in 3', 4', 5' and 6' diameters, the series offers multiple installation configurations including surface, suspended and recessed mounting, allowing the same visual language to be carried throughout a project.

The precision-formed aluminum housing is paired with a seamless diffused lens for smooth, continuous illumination around the entire ring.

Multiple CCT, CRI, dimming and finish options are available to accommodate a wide range of architectural environments.

Order Code

ORDER CODE EXAMPLE: CVL-100100-3'-HO-RC-S-3S-D1-30K-80-D10-GD

Series		Profile		Diameter		Power		Installation						Distribution of Light																	
CVL	CIRVOLA	100100	W4×H4	3'	3'	LO	Low output	Mounting	PD	Suspended	Mounting type	CC	Center Canopy	Cable Length	AC#	Aircraft Cable #specify length	___" (inches) ___" (inches)	3S	Down / Inner / Outer Illumination												
				4'	4'	HO	High output																								
				5'	5'	*See table below for wattage and efficacy.																									
				6'	6'																										
				*For other sizes, please consult the factory.																											

LENS		CCT		CRI		DIMMING		FINISH*		OPTIONS	
D1	PC Diffused (Opal)	27K	2700K	80	80	D10	0-10V	WH	White	EM10	10W EM BB
		30K	3000K	90	90	ELV	Triac/ELV	BK	Black	AC12#	12mm acoustic felt
		35K	3500K			DALI	DALI	SV	Silver		#Select felt color from page 4
		40K	4000K					GD	Gold		
								RAL	RAL#		
*HARDWARE FINISH											




Project:

Type:

Qty:

DIMENSIONS

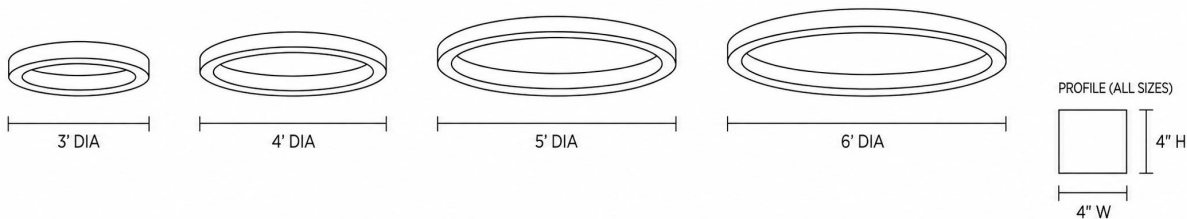

OUTPUTS

LUMEN OUTPUT & SYSTEM WATTAGE

DIAMETER	LOW OUTPUT (LO)		HIGH OUTPUT (HO)	
SIZE	SYSTEM WATTAGE	NOMINAL LUMENS	SYSTEM WATTAGE	NOMINAL LUMENS
3' / 36"	60W	4,800 lm	65W	5,590 lm
4' / 48"	70W	5,600 lm	75W	6,450 lm
5' / 60"	80W	6,400 lm	85W	7,310 lm
6' / 72"	90W	7,200 lm	95W	8,170 lm

* Nominal lumen output is calculated at 80 lm/W for LO and 86 lm/W for HO.





Project:

Type:



Qty:

INSTALLATION



SURFACE CEILING MOUNT

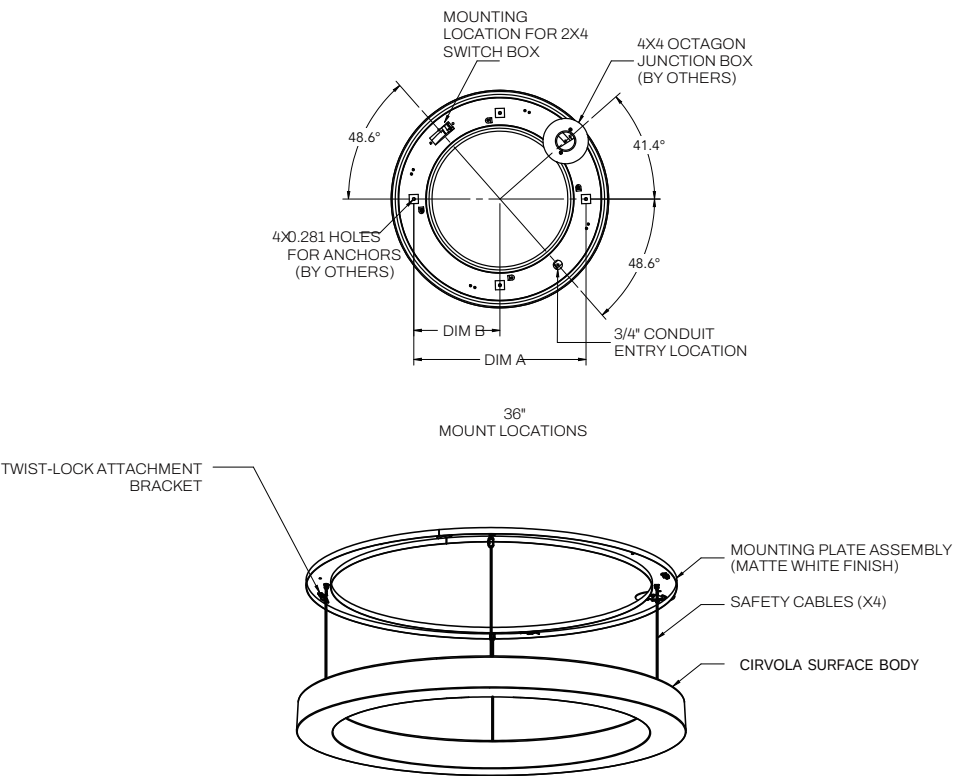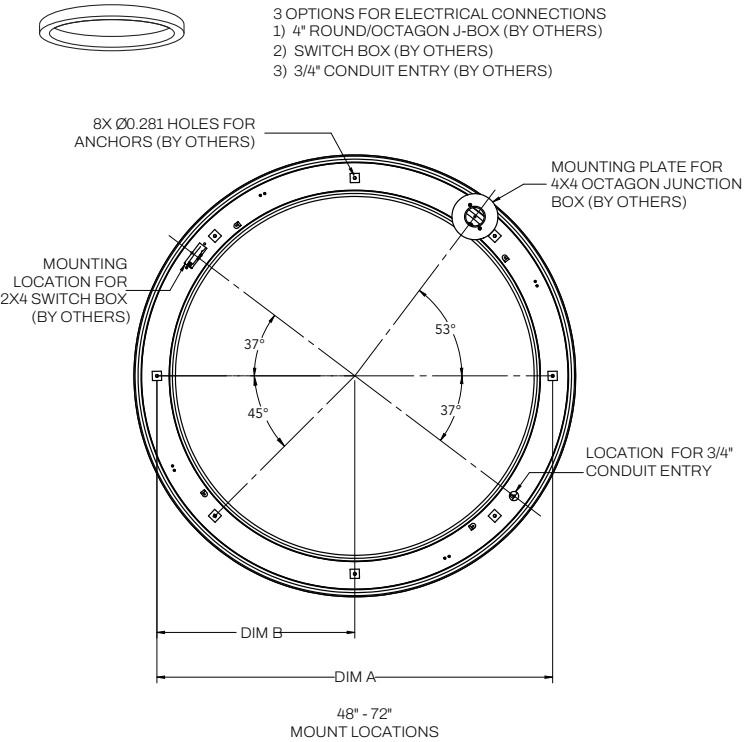

MULTI-POINT MOUNT

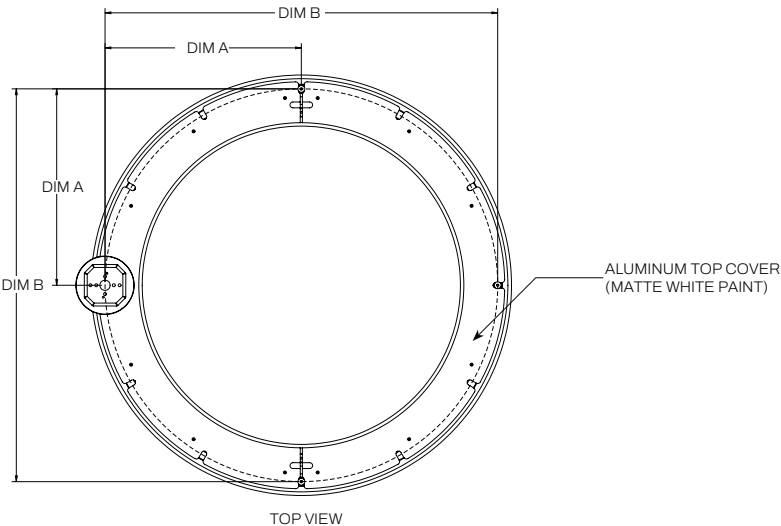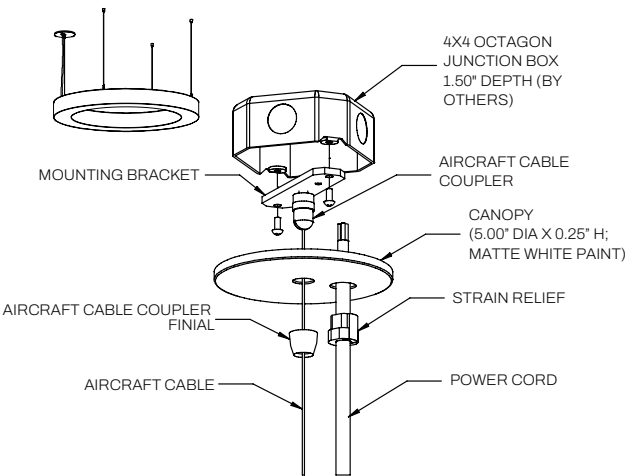

CENTER CANOPY MOUNT

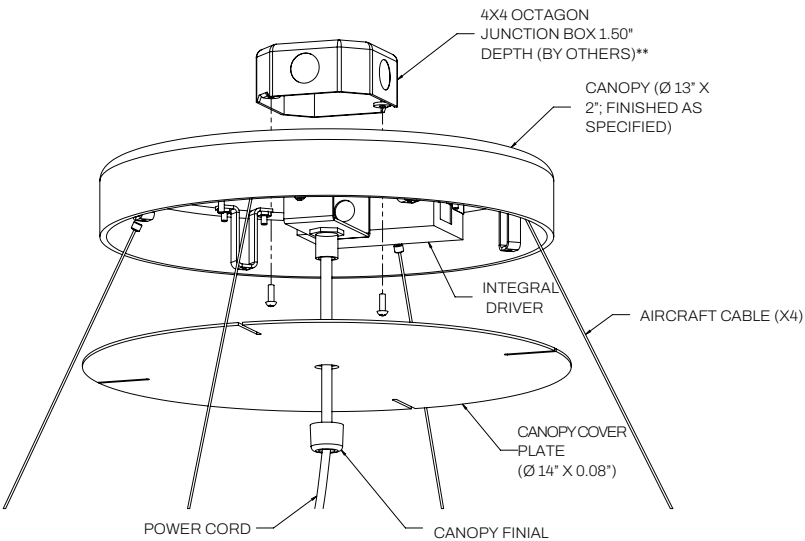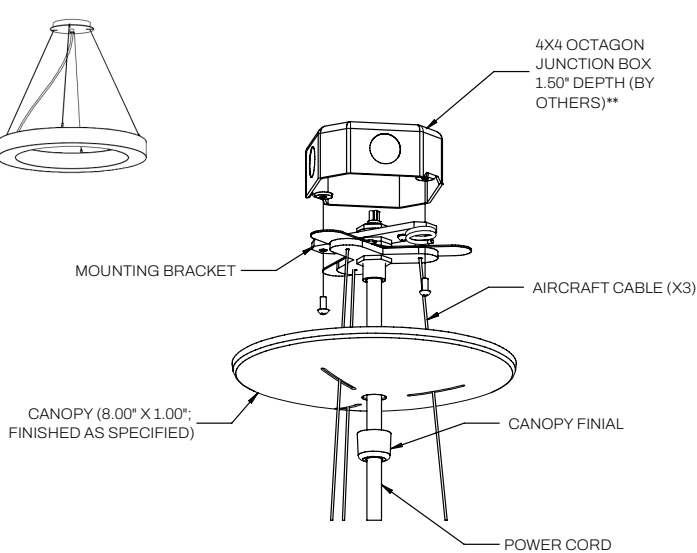

Project:	Type:	Qty:
----------	-------	------

ACOUSTIC FELT COLORS



PURE BLACK



CHARCOAL



SLATE



SHADOW
GRAY



PEARL ICE



CLASSIC
WHITE



SILVER GRAY



NATURAL LINEN



HAZELWOOD



CORNFLOWER
BLUE



DENIM BLUE



BRICK RED



MIDNIGHT
BLUE



DEEP
PURPLE



BERRY



CHERRY
RED



CARROT



DEEPWATER



PINEAPPLE




LIMESTONE



EMERALD
GREEN



BLUSH



SEAFOAM