

Project:

Type:

Qty:



CRANE's unique design allows you to adjust the distance it illuminates, supporting 90°-180° up and down adjustment, and 0-355° rotation.




Comes in standard CCTs 27K, 30K, 40K, 50K, 60K, including warm dim and tunable white.



Standard finish is black and white. Custom finish available upon request.

SPECIFICATIONS

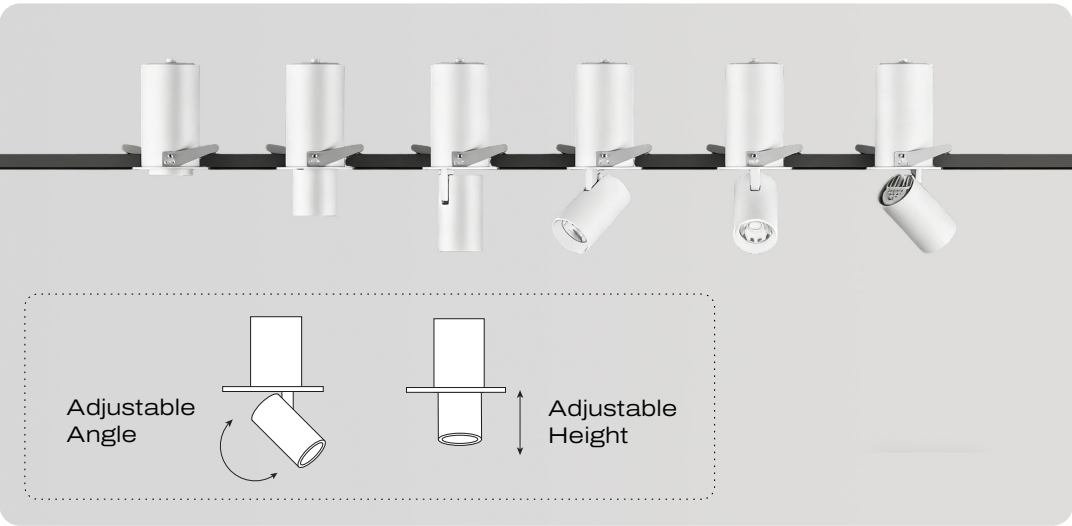

Input Voltage	100-277V AC
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K, 30K, 35K, 40K, D2W, TW
CRI	>90Ra
Adjustability	Max Tilt Angle 90°-180°/ Horizontal Rotation Angle 355°
Dimming	Trimode Dimming /Triac / 0-10V (100%-1%)
Lamp Life	50,000Hr
Environment	IP20
Operating Temp	-4° F - 104° F

Order Code








ORDER CODE EXAMPLE: CRN-50-35K-R36-BL-D10-NC

SERIES	SIZE	CCT	BEAM ANGLE	FINISH	DIMMING
CRN	23 1.57" (3W)	27K 2700K	R15 15 Degree	WH White	ELV ELV/TRIAC Phase Cutting 3%
	35 2.17" (5W)	30K 3000K	R24 24 Degree	BL Black	D10 0/1-10V (100% - 1%)
	50 2.95" (12W)	35K 3500K	R36 36 Degree	RAL Custom RAL	DAL DALI-2 Dim to off 0.1%
	65 3.95" (20W)	40K 4000K	R60 60 Degree		P01 Premium Diiver 0.1% LOG
	93 5.70" (38W)	TW Tunable White 2700K-6500K			
	93S 5.70" (38W)	WD Warm Dim 3000K-1800K			
	93D 4.72" (38W*2)		*CRN 23 & 35 is only available with 24°optic		

INSTALATION TYPE	EMERGENCY BACKUP
NC New Construction Tray	EM10 10W/90 Min

Project:	Type:	Qty:
----------	-------	------



SPECIFICATIONS

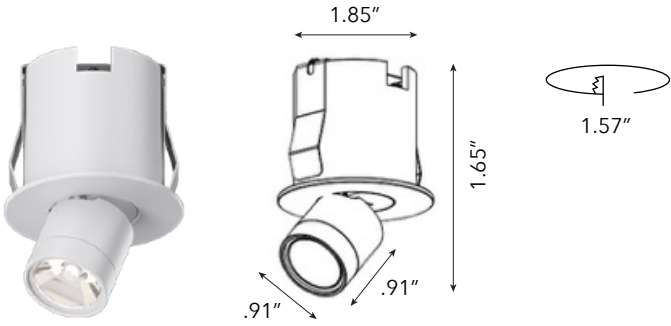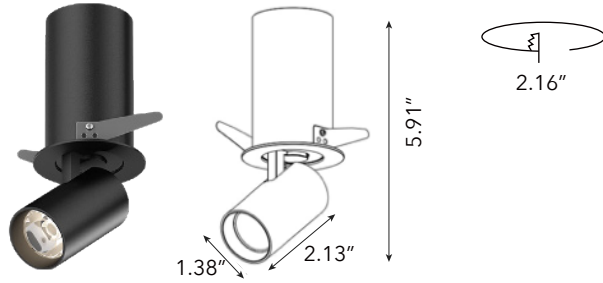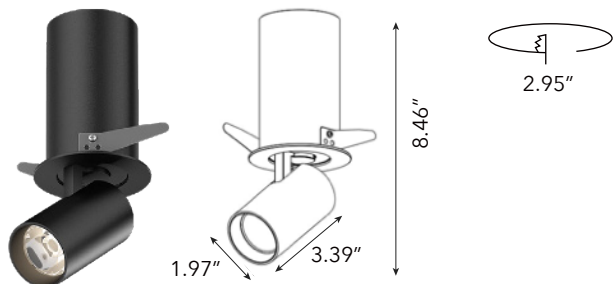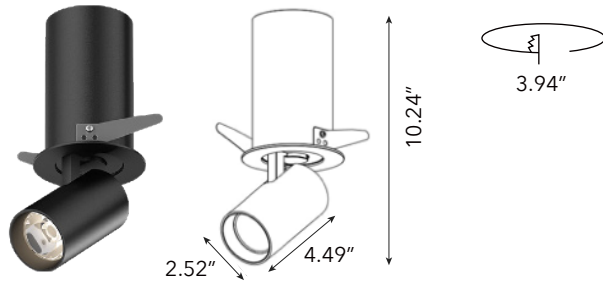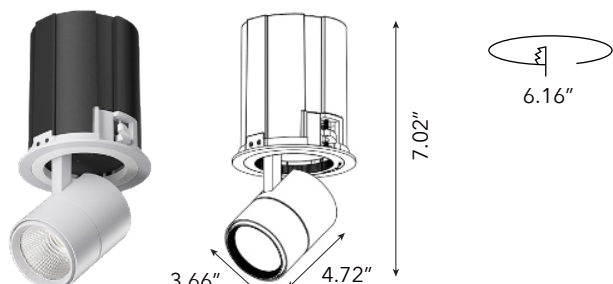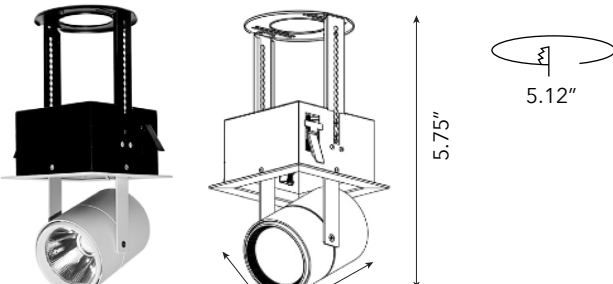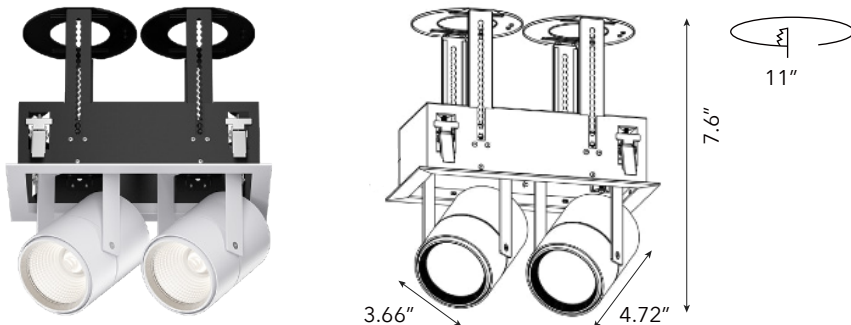 <p>CRN 23 3W-130LM</p>	 <p>CRN 35 3W-130LM</p>
 <p>CRN 50 12W-1025LM</p>	 <p>CRN 65 20W-1845LM</p>
 <p>CRN 50 38W-3485LM</p>	 <p>CRN 93S 38W-3485LM</p>
 <p>CRN 93D 38W-6270LM</p>	


Project:	Type:	Qty:
----------	-------	------

MOUNTING OPTIONS

NC - New Construction Frame-In Tray

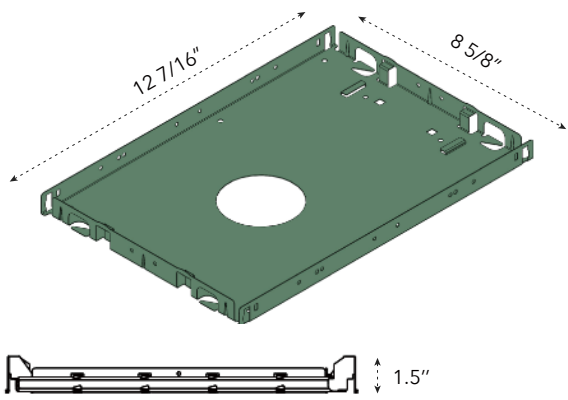


Standard bar hanger (included)
Mounting Length 14 3/4" - 26".
Extension kit can be ordered separately.




Commercial bar hanger #1487
Butterfly and Caterpillar brackets available



LED Driver Enclosure and Junction Box

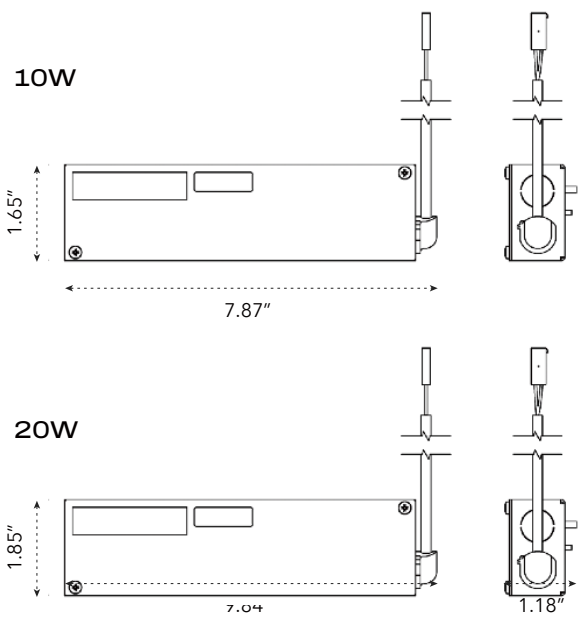

New Construction & Remodel Mounting

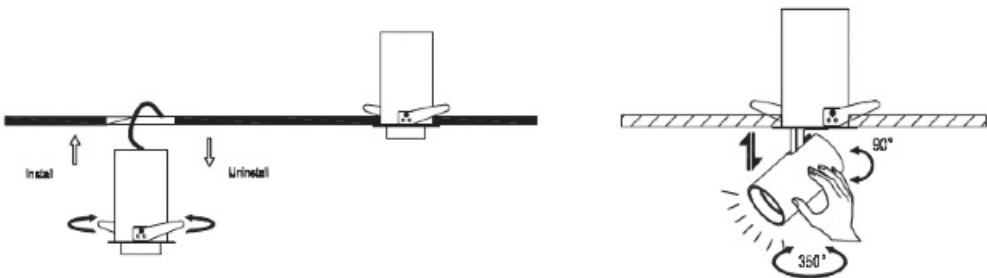

Project:

Type:

Qty:


EMERGENCY

PRIMARY SPECIFICATIONS

Output Power Max	Input Power	Input Current Max	Emergency Operating Time	Battery	Input Voltage	Output Voltage	Ambient Operating Temperature	UL Listed for Us and Canada
8W	<5W	100mA	>90 min	Li-ion 18650 7.4V 2500mAh	100-277Vac	15-55Vdc	0°C through 50°C	CUS

Dimensions / Weight

Length	12.4"	Height	1.81"
Width	1.1"	Mounting Length	11.88"
Weight	1.72 lb		

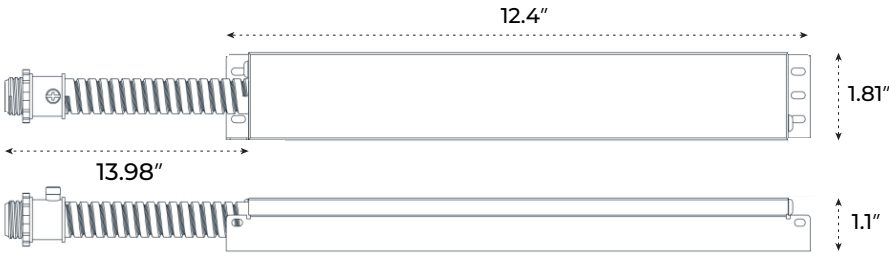

REMOTE TEST SWITCH


The Remote Test Switch may be mounted adjacent to the LED Fixture by others.

EMERGENCY BATTERY ACCESS

Above ceiling access is recommended for ease of service, but LED Fixture Sizes of 4" and Larger are capable of below ceiling access. IC/ICAT/CP Box and iTS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the Emergency Battery.

REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all Local and National Electric/Building Codes.

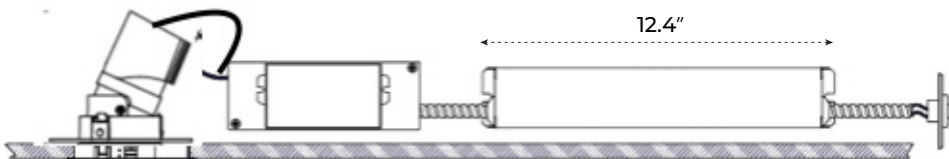

WALL PLATE ACCESSORIES

