

Project:	Type:	Qty:
----------	-------	------



District Series Bollards


Featuring a seamlessly integrated modular luminaire with no visible screws, the design remains clean and refined.

The built-in light module ensures reliable protection and stable outdoor performance.

Constructed from die-cast aluminum with a marine-grade powder-coated finish, offering excellent corrosion resistance with stainless steel hardware.

Impact-resistant, UV-stabilized acrylic lens maintains long-term clarity.

Sealed cable entry system ensures dependable all-weather performance.

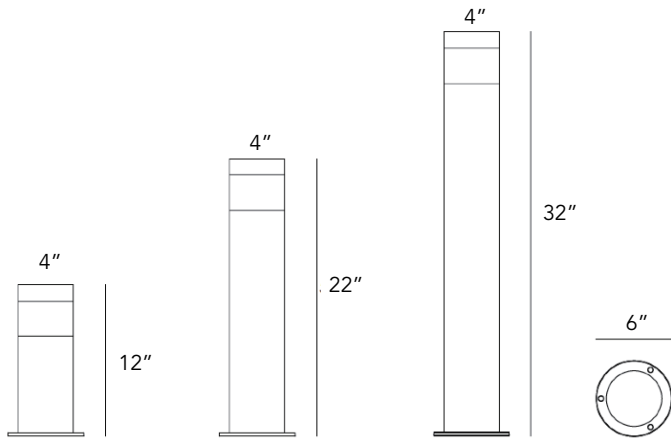


Input Voltage	120V-277V
LED	3 SDCM
CRI	>80Ra
Dimming	Triac / 0-10V
IK Rating	07
Lamp Life	50,000Hr
Environment	IP66
Operating Temp	-4° F - 104° F

ORDER CODE


ORDER CODE EXAMPLE: DISTRICT-D1LA-12-STD-35K-D10-LG

SERIES	TYPE/WATTAGE	HEIGHT	BASE	CCT	DIMMING	FINISH		
DISTRICT	D1LA LouverA 6W(183LM)	12 1'	D4PD ParabolicD 4.8W(300LM)	STD 2700K	ELV ELV/TRIAC Phase Cutting	BK Black		
	D2LB LouverB 6W(150LM)		D4PE ParabolicE 4.8W(265LM)			30K 3000K	D10 0-10V	DG Dark Grey
	D3LC LouverC 6W(156LM)		D5LF LouverF 4.8W(79LM)			35K 3500K	DAL DALI-2	LG Light Grey
	D1DA DiffusedA 8W(586LM)		D6GG GuideG 12W(337LM)			40K 4000K		
	D2DB DiffusedB 8W(450LM)		D7GH GuideH 6W(168LM)					
	D3DC DiffusedC 8W(679LM)							

Standard Base



Inground Base (optional)



Project:	Type:	Qty:
----------	-------	------

LUMINAIRE STYLES

Louvered

 <p>D1LA - 6W 183LM</p>	 <p>D2LB - 6W 150LM</p>	 <p>D3LC - 6W 156LM</p>
--	---	--

Diffused

 <p>D1DA - 8W 586LM</p>	 <p>D2DB - 8W 450LM</p>	 <p>D3DC - 8W 697LM</p>
--	---	--

Project:	Type:	Qty:
----------	-------	------

LUMINAIRE STYLES



D4PD - 4.8W
300LM




D4PE - 4.8W
265LM



D5LF - 4.8W
79LM



D6GG - 12W
337LM

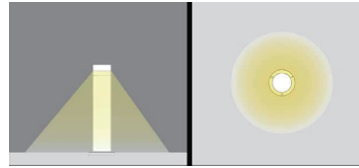

168LM

