

Project:

Type:

Qty:



District Series Bollards


Featuring a seamlessly integrated modular luminaire with no visible screws, the design remains clean and refined.

The built-in light module ensures reliable protection and stable outdoor performance.

Constructed from die-cast aluminum with a marine-grade powder-coated finish, offering excellent corrosion resistance with stainless steel hardware.

Impact-resistant, UV-stabilized acrylic lens maintains long-term clarity.

Sealed cable entry system ensures dependable all-weather performance.

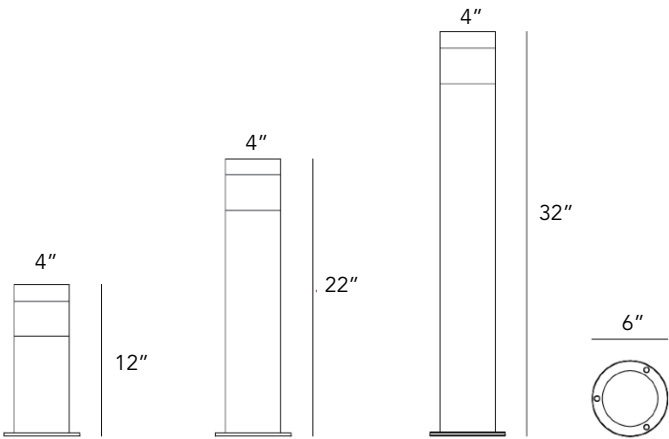


Input Voltage	120V-277V
LED	3 SDCM
CRI	>80Ra
Dimming	Triac / 0-10V
IK Rating	07
Lamp Life	50,000Hr
Environment	IP66
Operating Temp	-4° F - 104° F

ORDER CODE


ORDER CODE EXAMPLE: DISTRICT-D1LA-12-STD-35K-D10-LG

SERIES	TYPE/WATTAGE				HEIGHT	BASE		CCT		DIMMING		FINISH						
DISTRICT	D1LA	LouverA 6W(183LM)		D4PD	ParabolicD 4.8W(300LM)		12	1'	STD	Standard Base		27K	2700K	ELV	ELV/TRIAC Phase Cutting		BK	Black
	D2LB	LouverB 6W(150LM)		D4PE	ParabolicE 4.8W(265LM)		22	2'	ING	Inground Base		30K	3000K	D10	0-10V		DG	Dark Grey
	D3LC	LouverC 6W(156LM)		D5LF	LouverF 4.8W(79LM)		32	3'				35K	3500K	DAL	DALI-2		LG	Light Grey
	D1DA	DiffusedA 8W(586LM)		D6GG	GuideG 12W(337LM)							40K	4000K					
	D2DB	DiffusedB 8W(450LM)		D7GH	GuideH 6W(168LM)													
	D3DC	DiffusedC 8W(697LM)																

Standard Base



Inground Base (optional)



Project:

Type:

Qty:

LUMINAIRE STYLES

Louvered



D1LA - 6W
183LM



D2LB - 6W
150LM



D3LC - 6W
156LM

Diffused



D1DA - 8W
586LM



D2DB - 8W
450LM



D3DC - 8W
697LM

Project:

Type:

Qty:

LUMINAIRE STYLES



D4PD - 4.8W
300LM




D4PE - 4.8W
265LM



D5LF - 4.8W
79LM



D6GG - 12W
337LM

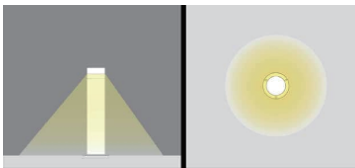

D7GH-6W
168LM

