

Project:

Type:

Qty:



FEATURES


Modular design, field replaceable LED module, trim, beam lens, and accessories

Interchangeable secondary reflector options for glare control and maximum visual comfort.

Quiet ceiling achieved through deep regress.


Precise light control, 15°/24°/38°/55° TIR lens beam options.

2" DIMENSIONS

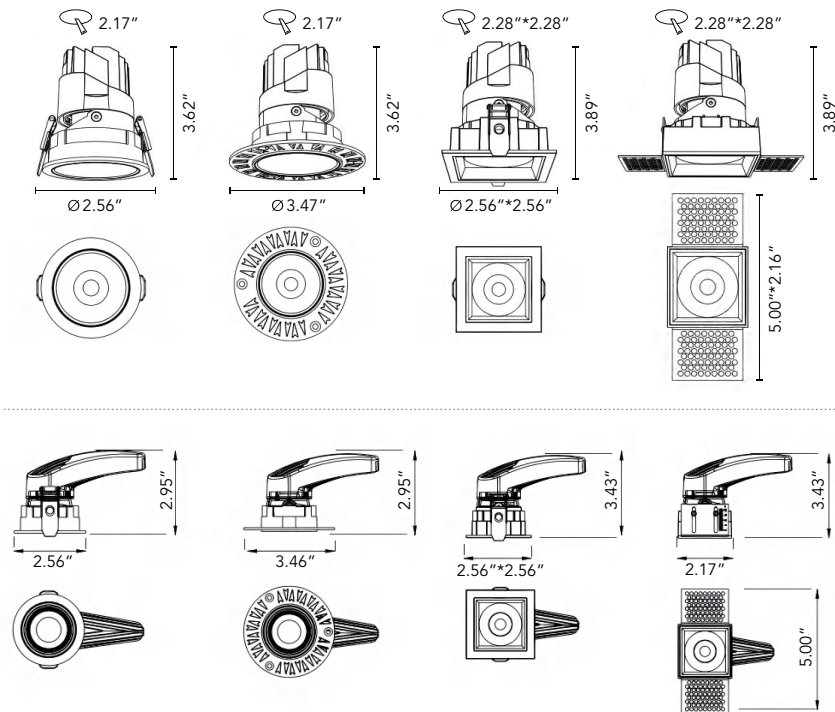

Input Voltage	100-277V AC
Wattage	8W
Delivered Lumens	506lm
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K,30K,35K,40K,50K (other CCTs available)
CRI	>90Ra
Adjustability	Max Tilt Angle 30° / Horizontal Rotation Angle 355°
UGR	<19
Lamp Life	50,000Hr
Environment	IP20 & IP44
Heat Sink	Aluminum body with oxidized powder coating
Trim	Die-cast Aluminum
Operating Temp	-4°F-104°F


3" DIMENSIONS

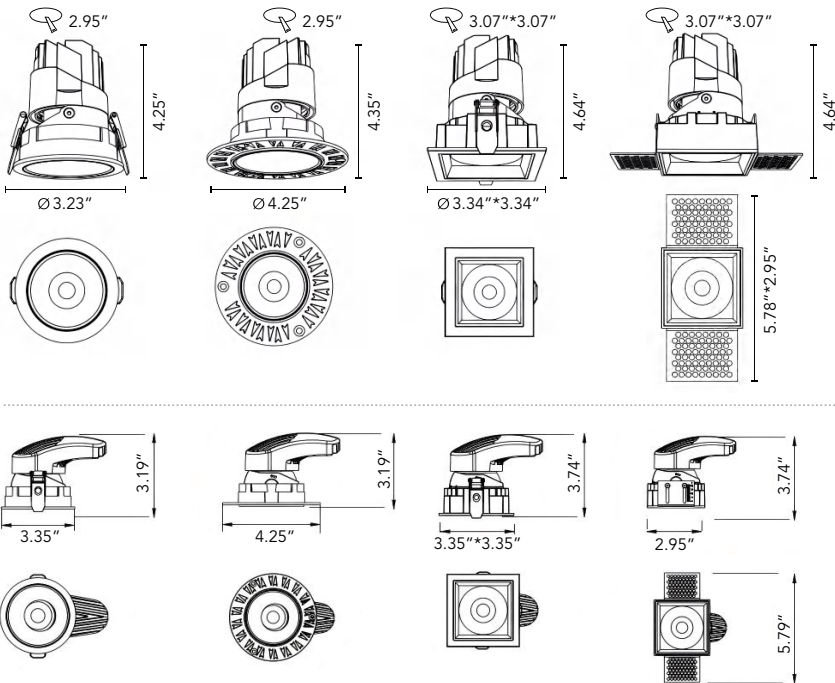

Input Voltage	100-277V AC
Wattage	8W/10W/12W/15W
Delivered Lumens	510lm-1185lm
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K,30K,35K,40K,50K (other CCTs available)
CRI	>90Ra
Adjustability	Max Tilt Angle 30° / Horizontal Rotation Angle 355°
UGR	<19
Lamp Life	50,000Hr
Environment	IP20 & IP44
Heat Sink	Aluminum body with oxidized powder coating
Trim	Die-cast Aluminum
Operating Temp	-4°F-104°F


Project:	Type:	Qty:
----------	-------	------

4" DIMENSIONS

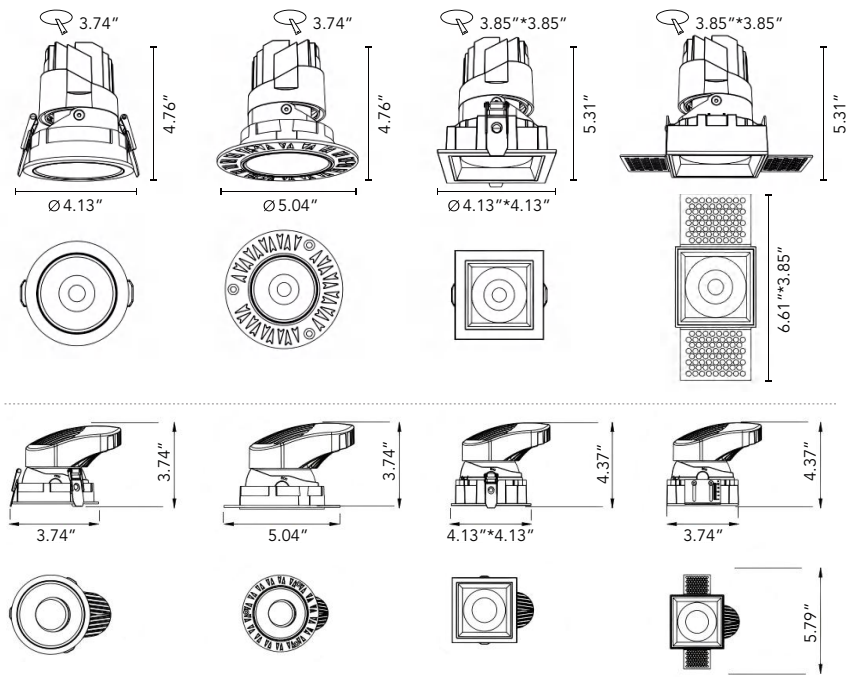

Input Voltage	100-277V AC
Wattage	10W/12W/15/18W
Delivered Lumens	758lm-1590lm
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K,30K,35K,40K,50K (other CCTs available)
CRI	>90Ra
Adjustability	Max Tilt Angle 30° / Horizontal Rotation Angle 355°
UGR	<19
Lamp Life	50,000Hr
Environment	IP20 & IP44
Heat Sink	Aluminum body with oxidized powder coating
Trim	Die-cast Aluminum
Operating Temp	-4°F-104°F

5"&6" DIMENSIONS

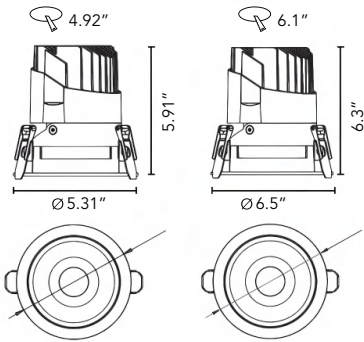

Input Voltage	100-277V AC
Wattage	12W/15W/18W/25W
Delivered Lumens	670lm-1342lm
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K,30K,35K,40K,50K (other CCTs available)
CRI	>90Ra
Adjustability	Max Tilt Angle 30° / Horizontal Rotation Angle 355°
UGR	<19
Lamp Life	50,000Hr
Environment	IP20 & IP44
Heat Sink	Aluminum body with oxidized powder coating
Trim	Die-cast Aluminum
Operating Temp	-4°F-104°F

ORDER CODE ORDER CODE EXAMPLE: GO2VE-3-RT-F-LO-30K-24D-SV-B-SL-D10-RM-EM10

SERIES	SIZE	TRIM	WATTAGE	CCT	BEAM ANGLE
GO2VE	2 2.0"	RT Round Trimmed	LO 8W	27K 2700K	TIR Lens 15D 15 Degree 24D 24 Degree 36D 36 Degree 55D 55 Degree
	2S 2.0" with Shallow Engine	RL ¹ Round Trimless		30K 3000K	
	3 3.0"	ST ¹ Square Trimmed	LO 8W	35K 3500K	
	3S 3.0" with Shallow Engine	SL ¹ Square Trimless	MO 10W	40K 4000K	
		¹ Not available for 5" and 6" fixtures	HO 12W	50K 5000K	
	4 4.0"		XHO 15W Non IC	TW Tunable White 2700K-6500K	
	4S 4.0" with Shallow Engine		LO 10W	WD Warm Dim 3000K-1800K	
			MO 12W		
			HO 15W		
			XHO 18W Non IC		
	5 5.0"		LO 12W		
	6 6.0"		MO 15W		

FINISH	OPTICAL ACCESSORIES	ENVIRONMENT	DIMMING	INSTALLATION TYPE	EMERGENCY BACKUP
Reflector WH White BK Black SV Silver GW Golden Wheat SP Specular SB Specular Black RAL# Custom	Trim W White B Black S Silver RAL# Custom	HL Honeycomb Louvre LL Linear Lens SL Solite Lens FL Frosted Lens CL Clear Lens	ELV Phase/Triac (3%) D10 0-10V (.1%) DAL DALI	NC New Construction Tray RM Remodel AT/CP Airtight/Chicago Plenum WC Wood Ceiling	EM10 10W/90 Min

Project:

Type:

Qty:

TRIM OPTIONS



Round Trim



Round Trimless



Square Trim



Square Trimless



Trimmed Pinhole

REFLECTOR OPTIONS



White



Black



Silver



Specular Black



Specular




Golden Wheat

OPTICAL LENS



Honeycomb Louvre



Linear Lens



Solite Lens



Frosted Lens



Clear Lens

PERFORMANCE 2"

90 CRI /2700K	10 DEGREE	15 DEGREE	24 DEGREE	36 DEGREE	55 DEGREE
8W	456Lm	470Lm	484Lm	498Lm	483Lm

90 CRI /3000K	10 DEGREE	15 DEGREE	24 DEGREE	36 DEGREE	55 DEGREE
8W	464Lm	478Lm	492Lm	506Lm	491Lm

PERFORMANCE 3"

90 CRI /2700K	10 DEGREE	15 DEGREE	24 DEGREE	36 DEGREE	55 DEGREE
8W	520Lm	550Lm	580Lm	600Lm	570Lm
10W	655Lm	690Lm	730Lm	750Lm	712.5Lm
12W	785Lm	830Lm	870Lm	900Lm	855Lm
15W Non IC	1010Lm	1055Lm	1095Lm	1125Lm	1080Lm

90 CRI /3000K	10 DEGREE	15 DEGREE	24 DEGREE	36 DEGREE	55 DEGREE
8W	590Lm	602Lm	627Lm	640Lm	620Lm
10W	735Lm	752Lm	784Lm	800Lm	768Lm
12W	885Lm	903Lm	940Lm	960Lm	920Lm
15W Non IC	1100Lm	1120Lm	1160Lm	1185Lm	1150Lm

PERFORMANCE 4"

90 CRI /2700K	10 DEGREE	15 DEGREE	24 DEGREE	36 DEGREE	55 DEGREE
10W	758Lm	790Lm	823Lm	672Lm	815Lm
12W	910Lm	948Lm	987Lm	840Lm	977Lm
15W	1137Lm	1185Lm	1230Lm	1280Lm	1220Lm
18W Non IC	1385Lm	1435Lm	1480Lm	1530Lm	1470Lm

90 CRI /3000K	10 DEGREE	15 DEGREE	24 DEGREE	36 DEGREE	55 DEGREE
10W	794Lm	827Lm	862Lm	880Lm	844Lm
12W	953Lm	993Lm	1034Lm	1056Lm	1013Lm
15W	1192Lm	1241Lm	1293Lm	1340Lm	1267Lm
18W Non IC	1445Lm	1495Lm	1540Lm	1590Lm	1530Lm

PERFORMANCE 5"& 6"

90 CRI /2700K	10 DEGREE	15 DEGREE	24 DEGREE	36 DEGREE	55 DEGREE
12W	670Lm	690Lm	715Lm	722Lm	675Lm
15W	860Lm	884Lm	912Lm	931Lm	865Lm
18W	1059Lm	1093Lm	1126Lm	1159Lm	1070Lm
25W Non IC	1165Lm	1202Lm	1239Lm	1275Lm	1177Lm

90 CRI /3000K	10 DEGREE	15 DEGREE	24 DEGREE	36 DEGREE	55 DEGREE
12W	705Lm	726Lm	748Lm	760Lm	710Lm
15W	905Lm	930Lm	960Lm	980Lm	910Lm
18W	1115Lm	1150Lm	1185Lm	1220Lm	1125Lm
25W Non IC	1227Lm	1265Lm	1304Lm	1342Lm	1238Lm


Project:

Type:

Qty:

MOUNTING OPTIONS

NC - New Construction Frame-In Tray

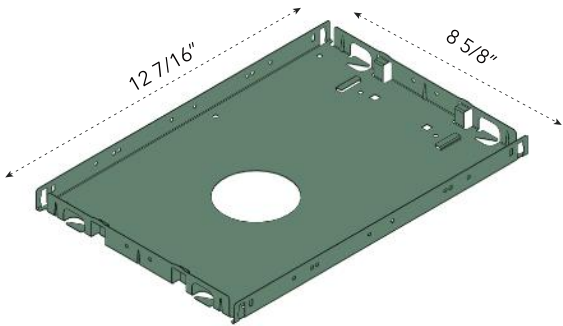

Standard bar hanger (included)

Mounting length 14 3/4" - 26".
Extension kit can be ordered separately.





Commercial bar hanger #1487

Butterfly and caterpillar brackets available



New Construction & Remodel Mounting

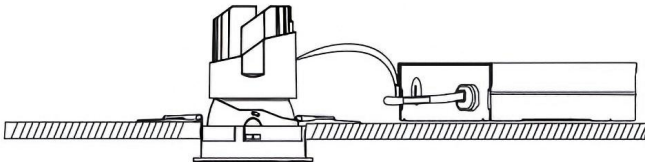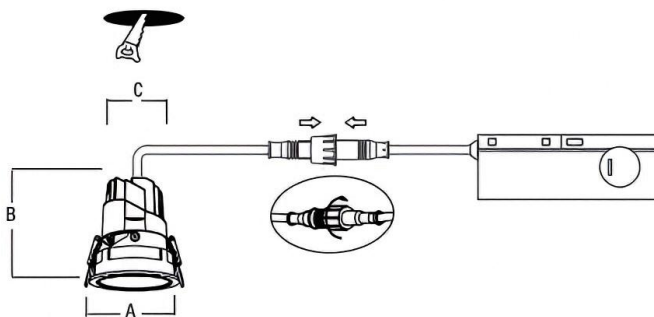


Note:


Small fixture housing and driver enclosure box assembly can be used for both new construction and remodel. For remodel application, no new construction tray is needed.

The ceiling cutout opening will be too small to fit your hand through it. So it is very important that the LED driver remains accessible by removing the lighting fixture, thus allowing you to inspect the connectors or LED driver at any time without physically damaging your ceiling or other building materials.


This mounting allows for installation from below the ceiling access and full serviceability of the LED driver and driver/-junction box.

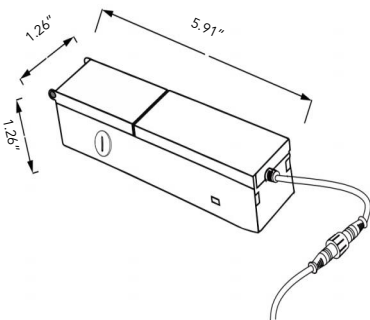

2" 9W-12W
Triac / ELV Dimmable
0-10V Dimmable

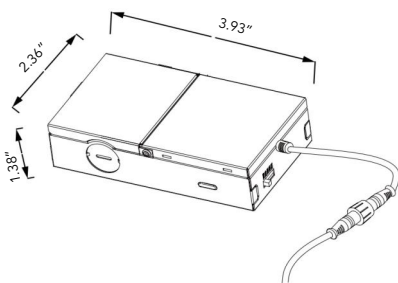


3" 9W-15W
Triac / ELV Dimmable
0-10V Dimmable

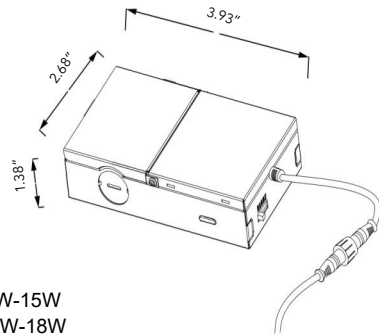

4" 9W-15W
4" 15W-18W
Triac / ELV Dimmable
4" 15W-18W
0-10V Dimmable

Chicago Plenum / Airtight

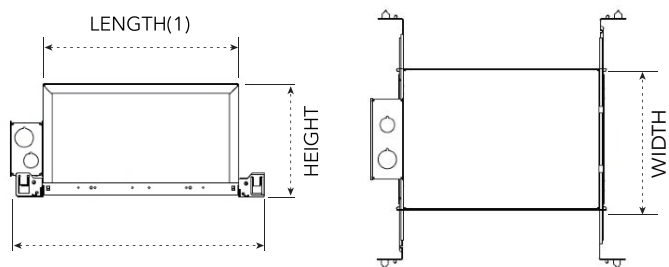

Length	Width	Height
11 3/4"	8 1/2"	4 3/4"
		6 3/4"

