



GO2 LITE – BINA

Overview
Go2 Lite is designed for both aesthetics and functionality. It installs and removes without damaging ceilings, ensuring a clean, hassle-free experience.

Design & Options
Available in square and round shapes, with bezel or bezel-less versions, Go2 Lite integrates seamlessly into modern interiors.

Performance
Power range: 6–20W. Deep anti-glare optics provide comfortable primary and ambient lighting for high-end indoor spaces.

Key Features


Damage-free installation and removal


Square and round shapes



Bezel and bezel-less options for seamless ceiling integration


Power range: 6–20W


Deep anti-glare optics for comfortable lighting


Sleek, modern, high-end design

SPECIFICATIONS

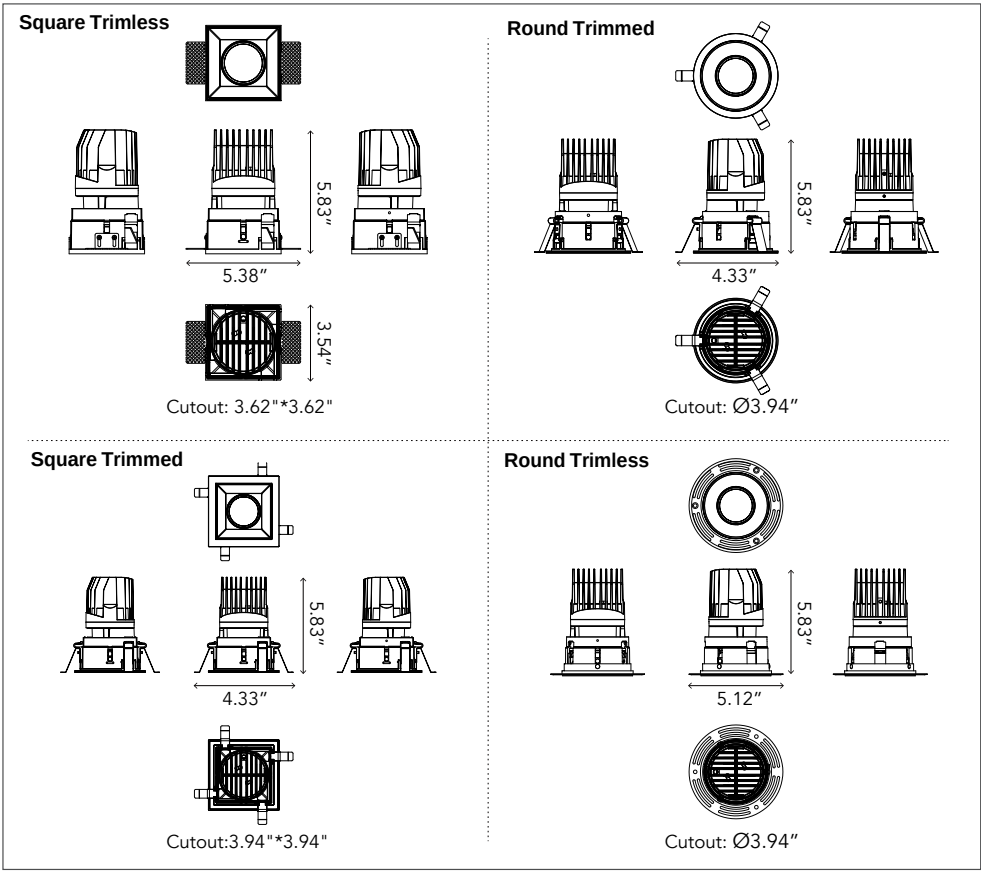

Input Voltage	100-277V
Wattage	20W
Delivered Lumens	1600lm
CRI	>90Ra
LED	SDCM=1x3 MacAdam Ellipse
Adjustability	Max Tilt Angle 30° / Horizontal Rotation Angle 356°
Dimming	Trial/0-10v(100%-5%)
Lamp Life	50,000Hr
Environment	IP20/IP44
Heat Sink	Aluminum body with oxidized powder coating
Trim	Die-cast Aluminum
Operating Temp	-4°F-104°F
 White  Black	

Order Code ORDER CODE EXAMPLE: GO2LT-4"-ST-F-20W-40LK-40D-WH-C-D10-NC

SERIES	SIZE	TRIM	WATTAGE	CCT	BEAM ANGLE	FINISH
GO2LT	4"	RT Round Trimmed	20W 1600lm	27K 2700K	15D 15 Degree	Reflector
		RL Round Trimless		30K 3000K	20D 20 Degree	Trim
		ST Square Trimmed		35K 3500K	30D 30 Degree	WH white
		SL Square Trimless		40K 4000K	40D 40 Degree	BK Black
				TW Tunable White 2700K-6500K	50D 50 Degree	W White
				WD Warm Dim 3000K-1800K	60D 60 Degree	B Black
						C Chrome
						RAL# Custom
OPTICAL ACCESSORIES		DIMMING		INSTALLATION TYPE		EMERGENCY BACKUP
— Solite Lens (included)		ELV ELV/TRIAC Phase Cutting 3%		NC New Construction Tray		EM10 10 watts / 90 mins
HL Honeycomb Louver		D10 0/1-10V(100%-1%)		RM Remodel (no NC Tray)		
LS Linear Spread Lens				IC IC Rated		



Project:

Type:


Qty:

MOUNTING OPTIONS

NC - New Construction Frame-In Tray

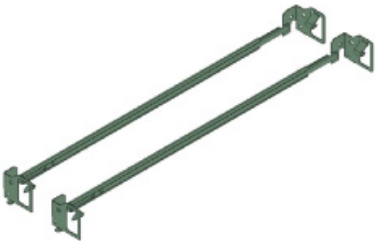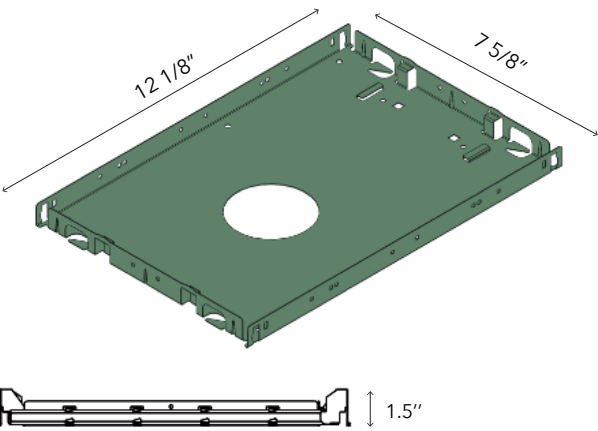


Standard bar hanger (included)
Mounting Length 14 3/4" - 26".
Extension kit can be ordered separately.


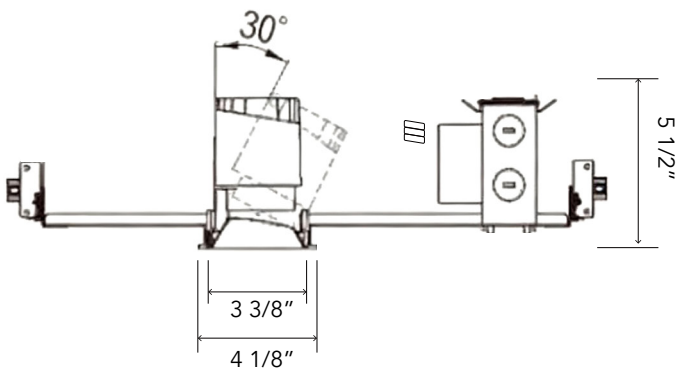


Ceiling Cut-out Ø3-15/16"(Ø100mm)
Mounting Frame 12-1/16"(307mm) X 7-5/8"(193.8mm)

IC - insulated Ceiling Box

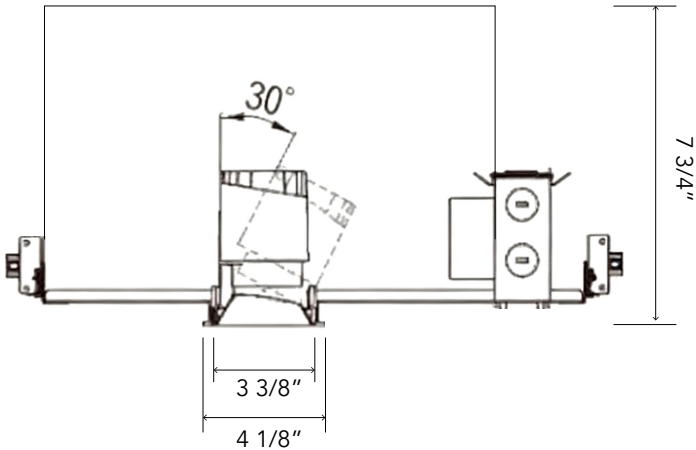

RM - Remodel without Frame-In Tray

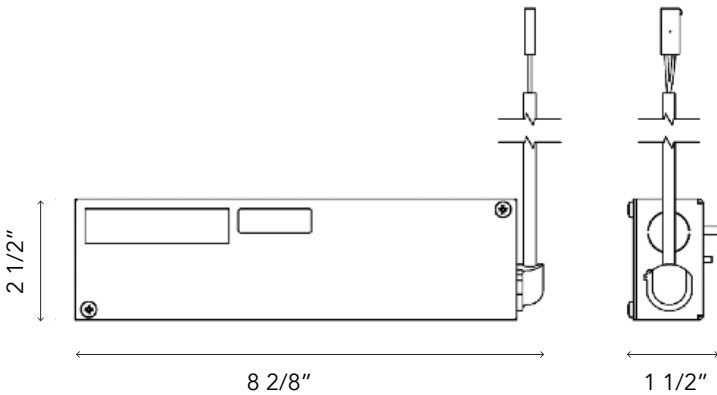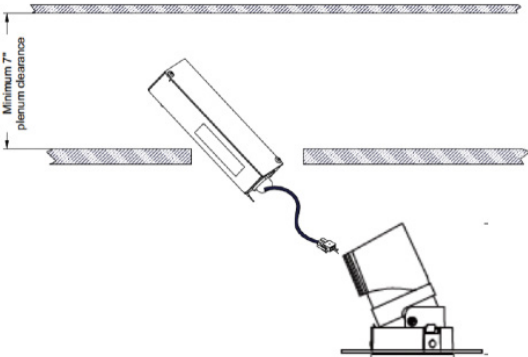


EMERGENCY

PRIMARY SPECIFICATIONS

Output Power Max	Input Power	Input Current Max	Emergency Operating Time	Battery	Input Voltage	Output Voltage	Ambient Operating Temperature	UL Listedfor Us and Canada
10W	4W	100 mA	90 min.	Li-ion 18650 7.4V 2500mAh	120-277 Vac 50/60Hz	12-55 VDC	0 °C through 55 °C	ULand cUL (UL924) Emergency LED Driver

Dimensions / Weight

Length	12.4"	Height	1.1"
Width	1.77"	Mounting Length	11.88"
Weight	2.47 lb		

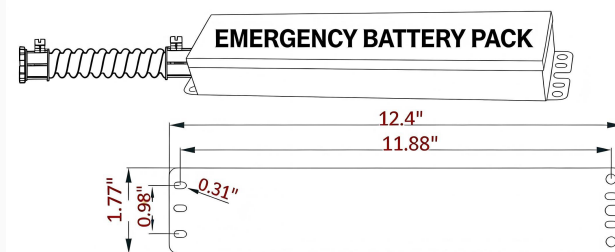

REMOTE TEST SWITCH


The remote test switch may be mounted adjacent to the LED fixture by others.

EMERGENCY BATTERY ACCESS


Above ceiling access is recommended for ease of service, but LED fixture sizes of 4" and larger are capable of below ceiling access. IC/ICAT/CP box and iTS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the emergency battery.

REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all local and national electric/building codes.

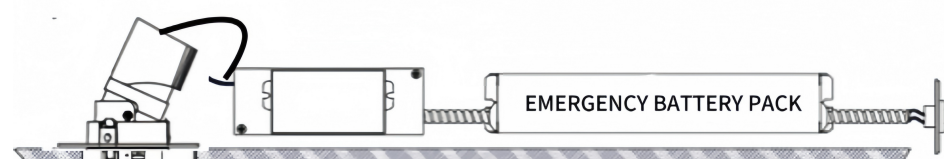

WALL PLATE ACCESSORIES

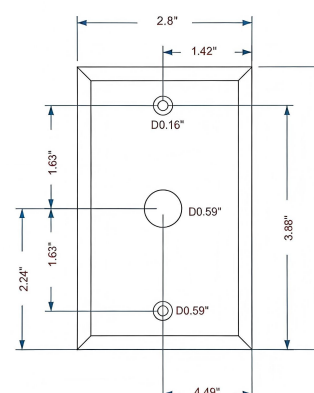

TEST SWITCH

