

Project:

Type:

Qty:



FEATURES



Taking its name from its long slender neck, Goose comes in an 8.5" neck and 4.75" neck.



Offered in a 0° - 45° vertical aiming tilt and 0-355° rotation.



Standard CCTs 27K, 30K, 40K, 50K, 60K




Black and White finish



Beam angles from 15°, 24°, 36°

SPECIFICATIONS

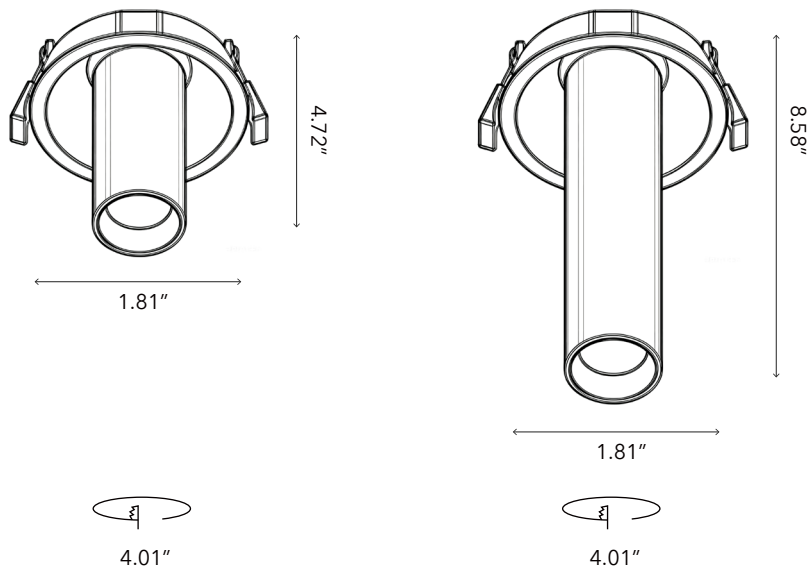

Input Voltage	100-277V AC
Wattage	6W
Delivered Lumens	563Lm +/-5%
LED	<3-Step MacAdam Ellipse (2-Step Available)
CCT	27K, 30K, 35K, 40K, D2W, TW
CRI	>90Ra
Adjustability	15°/24°/36°
Lamp Life	Max Tilt Angle 45° / Horizontal Rotation Angle 355°
Environment	Trimode Dimming / Triac / 0-10V (100%-1%)
Heat Sink	50,000Hr
Trim	IP20
Operating Temp	-4° F - 104° F

Order Code

ORDER CODE EXAMPLE: GOS-4-T-6W-27K-R36-BL-B-D10-NC

SERIES	SIZE	TRIM	WATTAGE	CCT	BEAM ANGLE	FINISH		DIMMING
						Finish	Reflector	
GOS	4 4.72"	T Trimmed	6W 563 Lm	27K 2700K	R15 15 Degree	WH White	W White	ELV Phase/Triac (3%)
	8 8.58"	L Trimless		30K 3000K	R24 24 Degree	BL Black	B Black	D10 0-10V (.1%)
				35K 3500K	R36 36 Degree			DAL DALI
				40K 4000K				
				TW Tunable White 2700K-6500K				L01 Lutron Hi-Lume 2-wire 1%
				WD Warm Dim 3000K-1800K				P01 Premium Driver0.1% LOG

INSTALLATION TYPE


EMERGENCY BACKUP

NC	New Construction Tray	EM10	10W/90 Min
RM	Remodel (no NC Tray)		
CP*	Chicago Plenum		
*	IC/CP available Q3 2023		


Project:	Type:	Qty:
----------	-------	------

MOUNTING OPTIONS

NC - New Construction Frame-In Tray

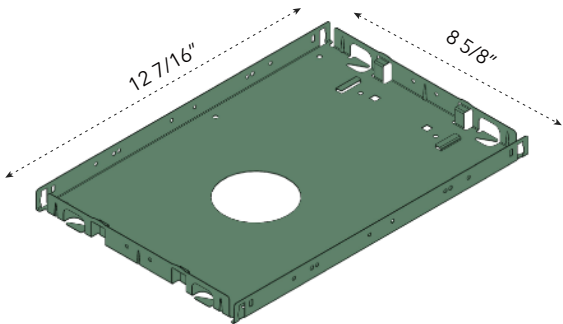



Standard bar hanger (included)
Mounting Length 14 3/4" - 26".
Extension kit can be ordered separately.




Commercial bar hanger #1487
Butterfly and Caterpillar brackets available



New Construction & Remodel Mounting

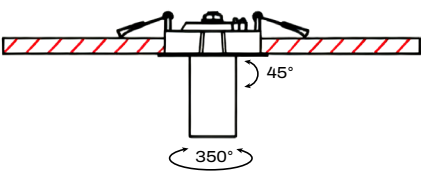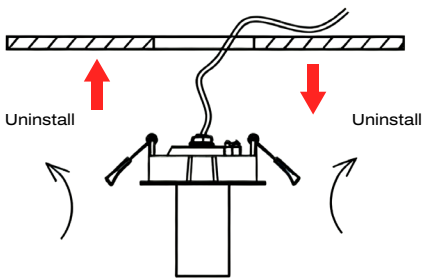

LED Driver Enclosure and Junction Box

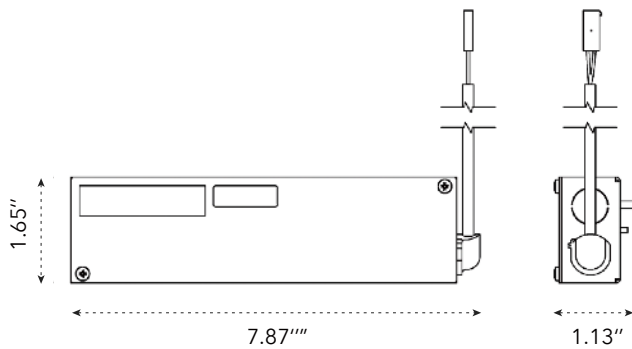

Project:

Type:

Qty:


EMERGENCY

PRIMARY SPECIFICATIONS

Output Power Max	Input Power	Input Current Max	Emergency Operating Time	Battery	Input Voltage	Qutput Voltage	Ambient Operating Temperature	UL Listedfor Us and Canada
10W	4W	60 mA	90 min.	LiFePO ₄ 24 Hour recharge 7 to 10 year Life expectancy	120-277 Vac 50/60Hz	12-55 V ¹	0 °C through 55 °C	ULand cUL (UL924) Emergency LED Driver

Dimensions / Weight

Length	9.5"	Height	1.2"
Width	1.7"	Mounting Length	8.9"
Weight	2.09 lb		

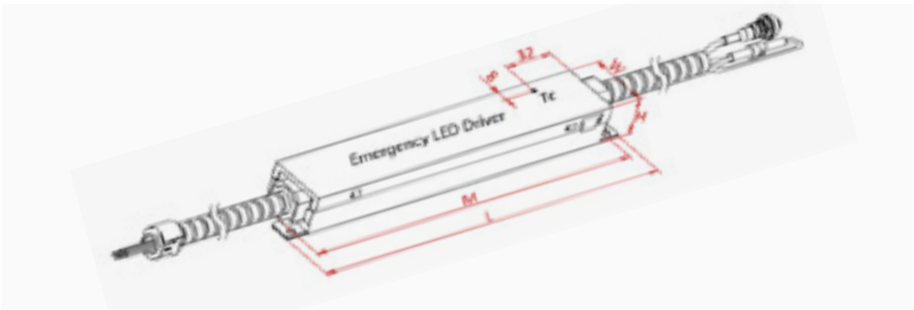

REMOTE TEST SWITCH

The Remote Test Switch may be mounted adjacent to the LED Fixture by others.

EMERGENCY BATTERY ACCESS

Above ceiling access is recommended for ease of service, but LED Fixture Sizes of 4" and Larger are capable of below ceiling access. IC/ICAT/CP Box and iTS option require an access panel in the ceiling (or other form of access) adjacent to the installation location of the Emergency Battery.

REMOTE LOCATION

Maximum remote mounting distance of the emergency driver shall be 50 feet. Remote location wiring provided by others. Follow all Local and National Electric/Building Codes.

WALL PLATE ACCESSORIES

