

Project:

Type:

Qty:



FEATURES

Premium outdoor in-ground spotlights meticulously crafted for high-end, luxury applications.

Available in five distinct sizes, each tailored to a specific power output for enhanced performance.

Versatile design options, including round (with or without bezel), square, and compatibility with various trim rings for maximum customization.

A wide range of optical options, including diffused, ring light, wall washer, and more, providing flexibility to suit any design need.

Superior material quality, robust structural integrity, and exceptional optical performance, making this series the perfect choice for upscale, architectural projects.

Order Code

ORDER CODE EXAMPLE: INLUX-CR-RDT-64-30K-25D-80-HMB-24V-D10-WH-MODELA

SERIES	INSTALLATION	TRIM	APPLICATION	SIZE / WATTAGE	CCT
In-Lux	IG Ingrade/ Inground	RDT Round Trimmed	Fixed	45 1.77" 2W	27K 2700K
	CR Ceiling Recessed	RDL Round Trimless	Adjustable*	54 2.13" 3W	30K 3000K
	WR Wall Recessed	SQL Square Trimless	Asymmetric/Wall Wash*	64 2.52" 5W	35K 3500K
			Diffused	80 3.15" 7W	40K 4000K
			Concentric Rings**	98 3.86" 9W	D2W 3000K-1800K
			*Only Available in Sizes 64D, 80D, and 98D		TW 6500K-1800K
			**Only Available in RDL&SQL		RCB N/A for 32R
					RGBW ____specify W N/A for 32R

BEAM ANGLE	CRI	OPTIONAL ACCESSORIES		
		Available in 45D, 64D, 98D Fixed Sizes Only	Available in 54 & 80D Fixed Sizes And all Adjustable Sizes	Available for all Asymmetric Sizes and Wall Mounted Sizes 45D, 54D & 64D
5D Asymmetric 5 Degree	80 80Ra	HMB Half Moon Blade	LG Lens & Grille	HMA Half Moon Silk Peint
15D 15 degree Available only in 2.13"	90 90Ra	HCL Honeycomb Louver	LC Lens & Cylindrical Barrel	VSL Vertical Slot Silk Peint***
18D 18 degree Not available in 1.77"/2.13"		MCB Multicyclic Blade	LS Lens & Shutters	HSL Horizontal Slot Silk Peint***
20D Asymmetric 20 Degree		TLB Three Leaf Blade		*Only Available in Wall Mounted Option
24D 24 degree Not available in 1.77"		SCB Single Crescent Blade		
25D 25 degree Available only in 1.77"		DCB Double Crescent Blade		
36D 36 degree Not available in 1.77"		SHT Shutters		
60D 60 degree Not available in 1.77"				
2050D 20D*50D Available only in 1.77"				
2055D 20D*55D Available only in 3.15"/3.86"				
25D 25D*65D Available only in 3.15"/3.86"				

INPUT VOLTAGE	DIMMING	FINISH	SLEEVE
12V 12V DC	NON Non Dim	B Black	Model A
24V 24V DC	ELV Triac/ELV	WH White	Model B
	D10 1-10V	GR Gray	
	DALI DALI	BR Brown Available only inTrimmedBrown	
	DMX DMX512	DG Dark Gray Available only inTrimmed	
		GD Golden Available only inTrimmed	

Project:

Type:

Qty:

SELECTABLE OPTICAL ACCESSORIES



Half Moon
Blade



Honeycomb
Louver



Multicyclic Light
Blade



Three-leaf Light
Blade



Double Crescent
Blade



Single Crescent
Blade



Crescent
Blade

OPTIONAL FINISHING COLOR FOR COVER



Black



White



Gray



Brown



Dark Gray



Golden

INTERIOR ANTI-GLARE OPTICAL ACCESSORIES



Lens&Grille



Lens&Cylindrical Barrel



Lens&Shutters

WALL RECESSED SERIES



HMA
Half Moon Silk Peint



VSL
Vertical Slot Silk Peint***



HSL
Horizontal Slot Silk Peint***



***Only available in wall mounted option

Project:

Type:

Qty:

SPECIFICATIONS

ROUND TRIMLESS

<p>45</p> <p>MODEL A MODEL B</p>	<p>54</p> <p>MODEL A MODEL B</p>	<p>64</p> <p>MODEL A MODEL B</p>	<p>80</p> <p>MODEL A MODEL B</p>	<p>98</p> <p>MODEL A MODEL B</p>
--	--	--	--	--

ROUND TRIMMED

<p>45</p> <p>MODEL A MODEL B</p>	<p>54</p> <p>MODEL A MODEL B</p>	<p>64</p> <p>MODEL A MODEL B</p>	<p>80</p> <p>MODEL A MODEL B</p>	<p>98</p> <p>MODEL A MODEL B</p>
--	--	--	--	--

SQUARE TRIMLESS

<p>45</p> <p>MODEL A MODEL B</p>	<p>54</p> <p>MODEL A MODEL B</p>	<p>64</p> <p>MODEL A MODEL B</p>	<p>80</p> <p>MODEL A MODEL B</p>	<p>98</p> <p>MODEL A MODEL B</p>
--	--	--	--	--


Project:

Type:


Qty:

INSTALLATION INSTRUCTIONS


STEP 1 ▶ Before installation, pre-lay the electrical cable and excavate the foundation pit according to the size of the embedded housing. (For detailed dimensions, please refer to the fixture's line drawing.)

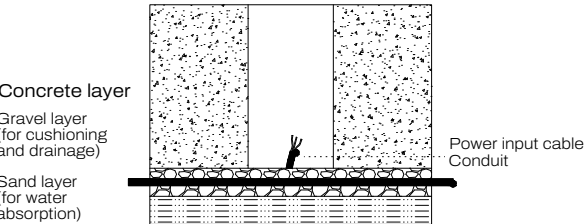


STEP 2 ▶

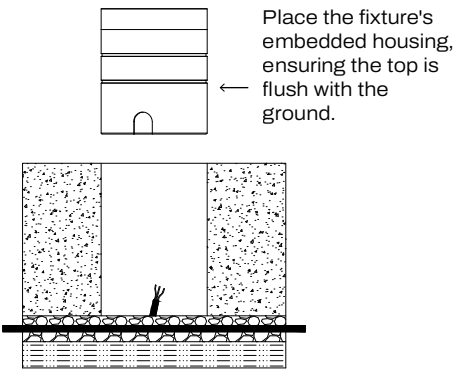


STEP 3 ▶

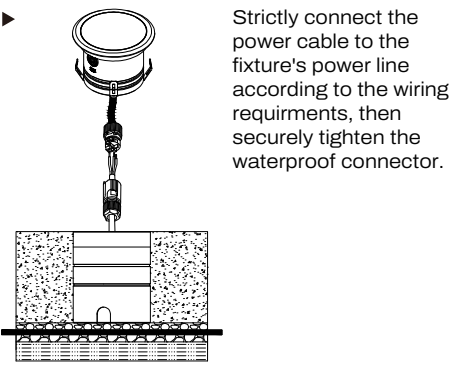


STEP 4 ▶

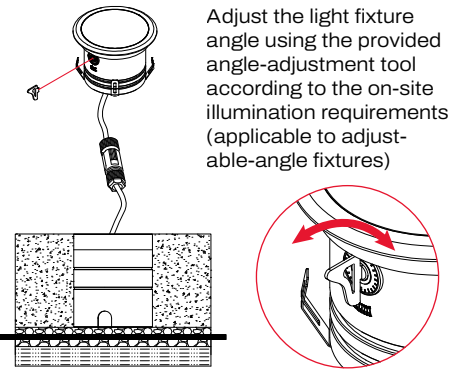

STEP 5 ▶

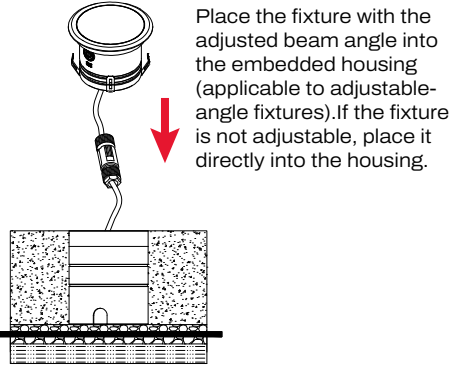


STEP 6 ▶

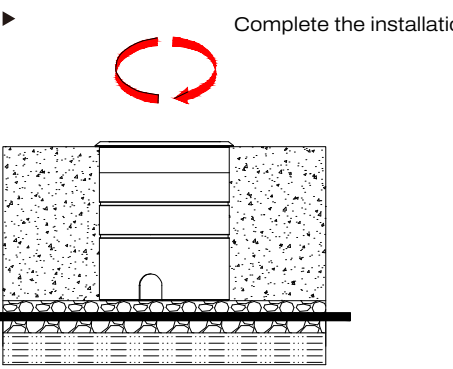


CONNECTION DIAGRAM


24VDC

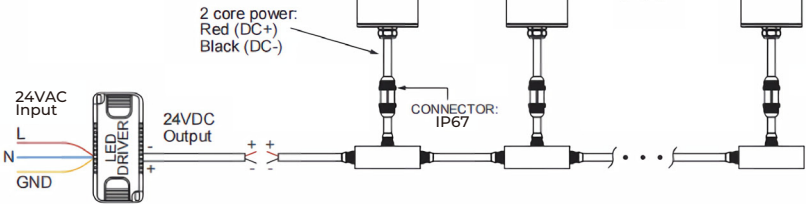

24VDC RGB

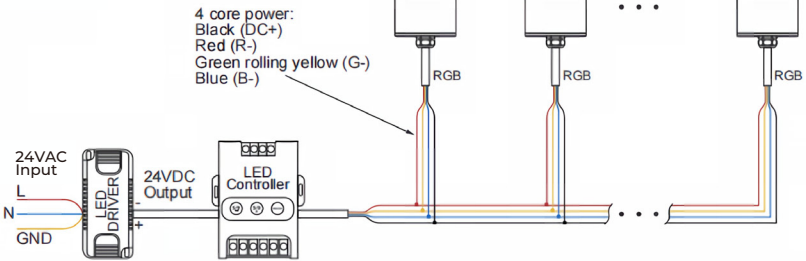

24VDC DMX512

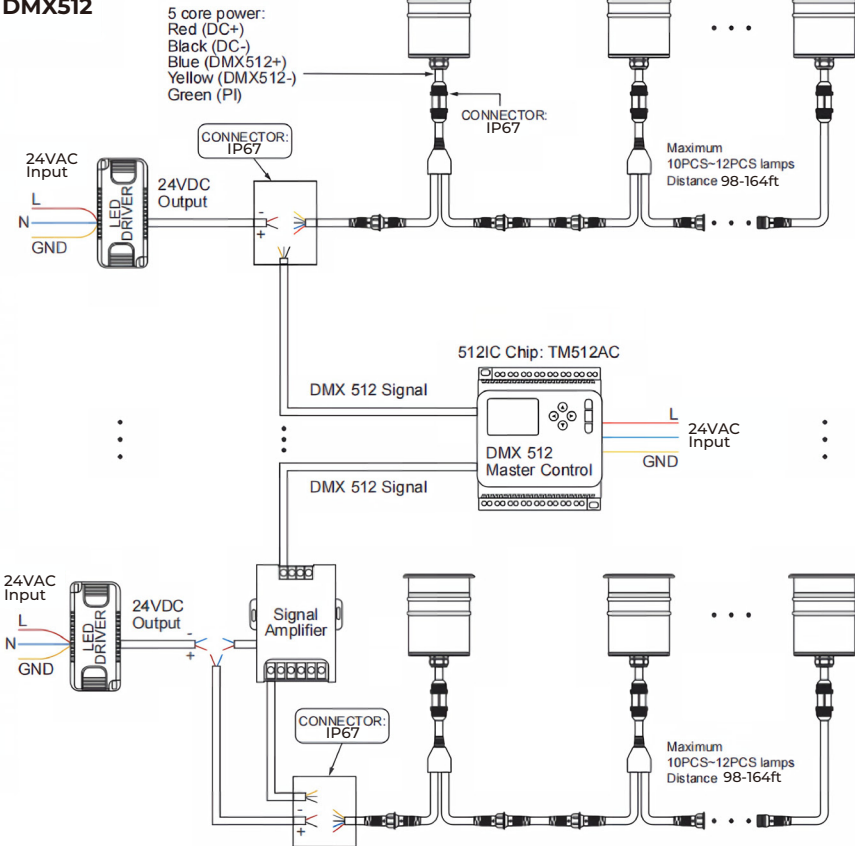

SAFETY INSTRUCTIONS BEFORE INSTALLATION

- Installation must be carried out by a qualified technician or authorized professional.
- Always disconnect power before installation to prevent the risk of electric shock.
- Ensure adequate ventilation space around the LED heat sink to allow proper cooling.
- Only connect LED luminaires using the recommended drivers.
- The actual product may vary slightly from the illustrations shown.
- Do not attempt to disassemble the product.
- Any damage caused by modifications or improper installation will void the warranty.

