


S~O8

Solid

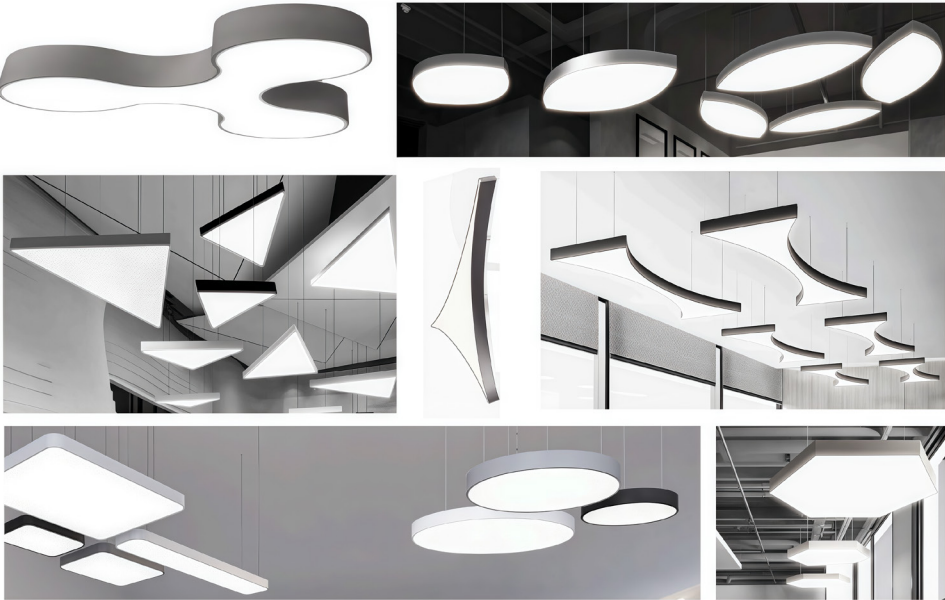

Project:

Type:

Qty:

A highly versatile series of custom solid shapes.

Can be illuminated from the front, back or both sides of the shape.

A wide range of profile sizes.

Pendant, ceiling or wall surface and recessed mounting options.

High lumen packages (up to 150Lm/w).

Power ranging from 10W - 794W.

A full range of CCTs available as well as Full Spectrum.

Standard finishes in white, black, silver, gold and custom RAL finishes.

Triac/ELV/Phase, 0-10V, Dali, and Tunable dimming options.

Emergency Backup options available.

Built-in or external driver options.

Order Code

ORDER CODE EXAMPLE: S-08SOLID-100-HF-RC-3.2"x4.1"-SF-S-3-FB-P3-50K-90-DAL-BK-EM

SERIES	CHANNEL	SHAPE	CORNER DETAIL	SIZE
S-08 SOLID	Channel Height	Round Shapes	Polygon Shapes	Other Shapes
	80 3" High	RD Round	TR Triangle	FS Fish
	100 4" High	HF Half Round ²	SQ Square	AM Amoeba
	— Custom specify in inches	CD Cloud	RT Retangle	BO Boomerang
	FL Flange ¹	EP Elliple	DI Diamond	MN Moon
	LP Channel Lip ¹	EY Eye	HX Hexagon	SS Special Shapes sketch or submit drawing
		OV Oval	RC Rounded Corner	AC Angled Corner
				___" Round Shapes
				___" X ___" Poly Shapes (Width x Length)
				___" Other Shapes (overall size)
				___" Special Shapes detail size on drawing or sketch

INSTALLATION	DISTIBUTION OF LIGHT	LENS	CCT
Mounting			
PD Suspended	DN Direct Down/Frontlit	D1 PC Diffused (Opal)	27K 2700K
	UP Indirect UP/Backlit	P1 Mico-prismatic ⁴	30K 3000K
	FB Front & Backlit ³	P3 Diffused Prismatic	35K 3500K
SF Surface			40K 4000K
			50K 5000K
DR Recessed Drywall			TW Tunable White 2700K-6500K
RG Recessed Grid			WD Warm Dim 3000K-1800K
			RGB
			RGBW ___specify W

CRI	DISIRED LUMENS	DIMMING	FINISH	EMERGENCY BACKUP	Power / Lumen Range
80 80	___Lm/F Example: 100 = 100 lm/f OR Total Lumens	D10 0-10V	WH White	EM	Standard: 10W - 200W
90 90	___LM Example:5000LM for entire fixture	ELV Triac/ELV	BK Black		Total Lumens: 1000lm - 20,000lm
95 95	Since S08 is highly customizable, the lumen package wilbe based on the channel size and power supply whichranges from 10W to 720W. For FB, specify disiredlumens per side.	DAL Dali	SV Silver		Higher wattage drivers available up to 720W
		DMX DMX	GD Gold		Efficacy (Delivered): 89lm/w - 100lm/w
		NON Non Dim	RAL RAL#		Dimmable from 100% - 1% with 0-10V dimming control
			SPC Special Finish		Emergency backup: 1.5hr @ 30% of light output

1. If a flange or channel lip is desired, specify after channel height (example: 80FL or 80LP)
2. Specify radius for halfrounds
3. Also Up/Down
4. Can see lamp image
5. For UD/FB, specify lumens per side

In an effort to offer the best product possible, we reserve the right to change, without notice, specification or material of the product.

info@binacompany.com

305.735.3114

www.binacompany.com



Project:


Type:

Qty:

CHANNELS



MOUNTING OPTIONS

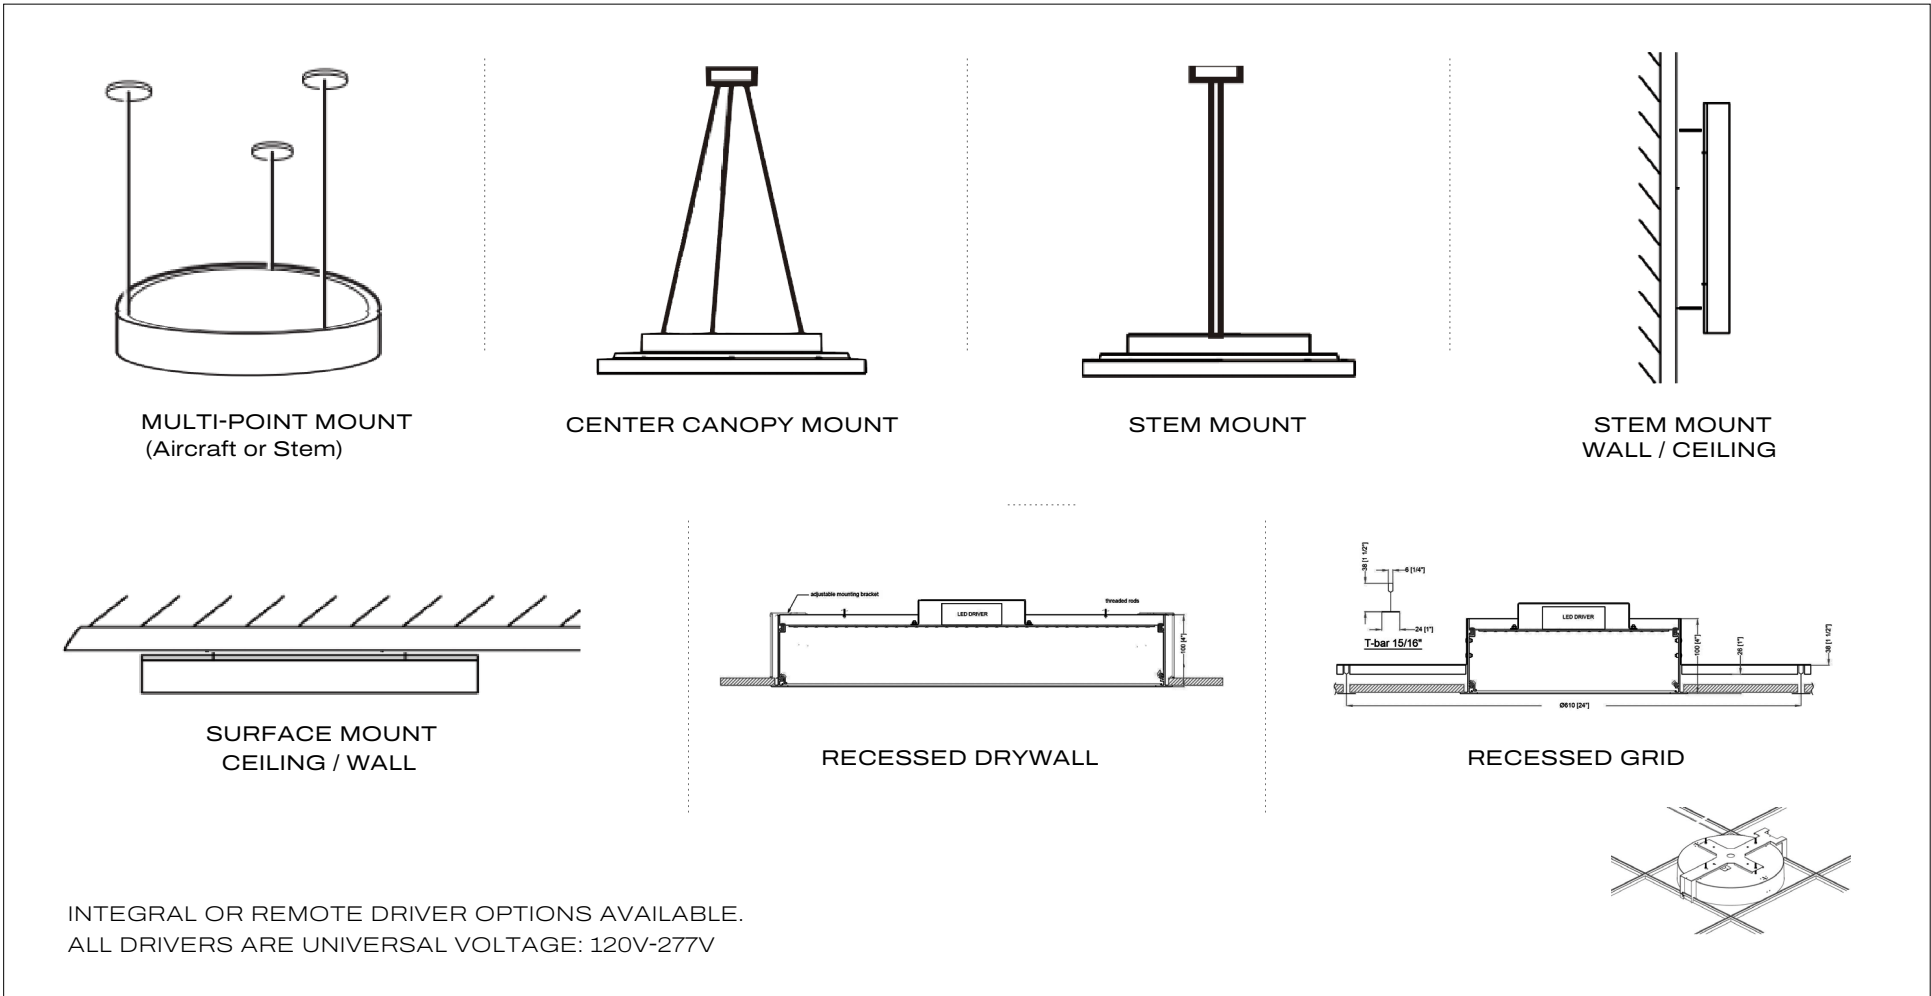

Project:	Type:	Qty:
----------	-------	------

SHAPES

ROUND SHAPES



ROUND



HALF ROUND



CLOUD



ELLIPSE



EYE



OVAL

Project:	Type:	Qty:
----------	-------	------

SHAPES

POLYGONS



RECTANGLE



TRIANGLE



HEXAGON



SQUARE



DIAMOND

Project:	Type:	Qty:
----------	-------	------

SHAPES

OTHER SHAPES



FISH



AMOEBIA



BOOMARANG



MOON

Project:	Type:	Qty:
----------	-------	------

SKETCH PAD

Use the below sketch pad to sketch out the desired shape.

.....

A drawing or sketch will be required for all non-basic shapes and designs.

.....

The factory will produce drawings for all “sketched” shapes/designs.