

S~O8

Solid



Project:

Type:

Qty:

A highly versatile series of custom solid shapes.

Can be illuminated from the front, back or both sides of the shape.

A wide range of profile sizes.

Pendant, ceiling or wall surface and recessed mounting options.

High lumen packages (up to 150Lm/w).

Power ranging from 10W - 794W.

A full range of CCTs available as well as Full Spectrum.

Standard finishes in white, black, silver, gold and custom RAL finishes.

Triac/ELV/Phase, 0-10V, DALI and Tunable dimming options.

Emergency Backup options available.

Built-in or external driver options.

Order Code

ORDER CODE EXAMPLE: S-O8SOLID-100-HF-RC-3.2"x4.1"-SF-S-3-FB-P3-50K-90-DAL-BK-EM

SERIES	CHANNEL	SHAPE	CORNER DETAIL	SIZE
S-O8 SOLID	Channel Height	Round Shapes	Polygon Shapes	Other Shapes
	80 3" High	RD Round	TR Triangle	FS Fish
	100 4" High	HF Half Round ²	SQ Square	AM Amoeba
	— Custom specify in inches	CD Cloud	RT Rectangle	BO Boomerang
	FL Flange ¹	EP Ellipse	DI Diamond	MN Moon
	LP Channel Lip ¹	EY Eye	HX Hexagon	SS Special Shapes sketch or submit drawing
		OV Oval	RC Rounded Corner	AC Angled Corner
				___" Round Shapes
				___" X ___" Poly Shapes (Width x Length)
				___" Other Shapes (overall size)
				___" Special Shapes detail size on drawing or sketch

INSTALLATION					DISTRIBUTION OF LIGHT		LENS		CCT						
Mounting		Mounting Type		Cable/Stem Length											
PD	Suspended	A	Aircraft Cable	CC	Center Canopy	DN	Direct Down/Frontlit	D1	PC Diffused (Opal)	27K	2700K				
		S	Stem	MP	Multiple Points					30K	3000K				
SF	Surface	D	Direct Mount							FB	Front & Backlit ³	P1	Micro-prismatic ⁴	35K	3500K
		S	Stem Mount									P3	Diffused Prismatic	40K	4000K
RD	Recessed Drywall													50K	5000K
RG	Recessed Grid														

CRI	DESIRED LUMENS	DIMMING	FINISH	EMERGENCY BACKUP	Power / Lumen Range
80 80	___Lm/F Example: 100 = 100 lm/f OR Total Lumens	D10 0-10V	WH White	EM	Standard: 10W - 200W
90 90	___LM Example: 5000LM for entire fixture	ELV Triac/ELV	BK Black		Total Lumens: 1000 lm - 20,000 lm
95 95	Since S-O8 is highly customizable, the lumen package will be based on the channel size and power supply which ranges from 10W to 720W. For FB, specify desired lumens per side.	DAL DALI	SV Silver		Higher wattage drivers available up to 720W
		DMX DMX	GD Gold		Efficacy (Delivered): 89lm/w - 100lm/w
		NON Non Dim	RAL RAL#		Dimmable from 100% - 1% with 0-10V dimming control
			SPC Special Finish		Emergency backup: 1.5 hr @ 30% of light output

1. If a flange or channel lip is desired, specify after channel height (example: 80FL or 80LP)
2. Specify radius for halfrounds
3. Also Up/Down
4. Can see lamp image
5. For UD/FB, specify lumens per side

In an effort to offer the best product possible, we reserve the right to change product specifications or materials without notice.

info@binacompany.com

305.735.3114

www.binacompany.com



Project:


Type:

Qty:

CHANNELS




MOUNTING OPTIONS

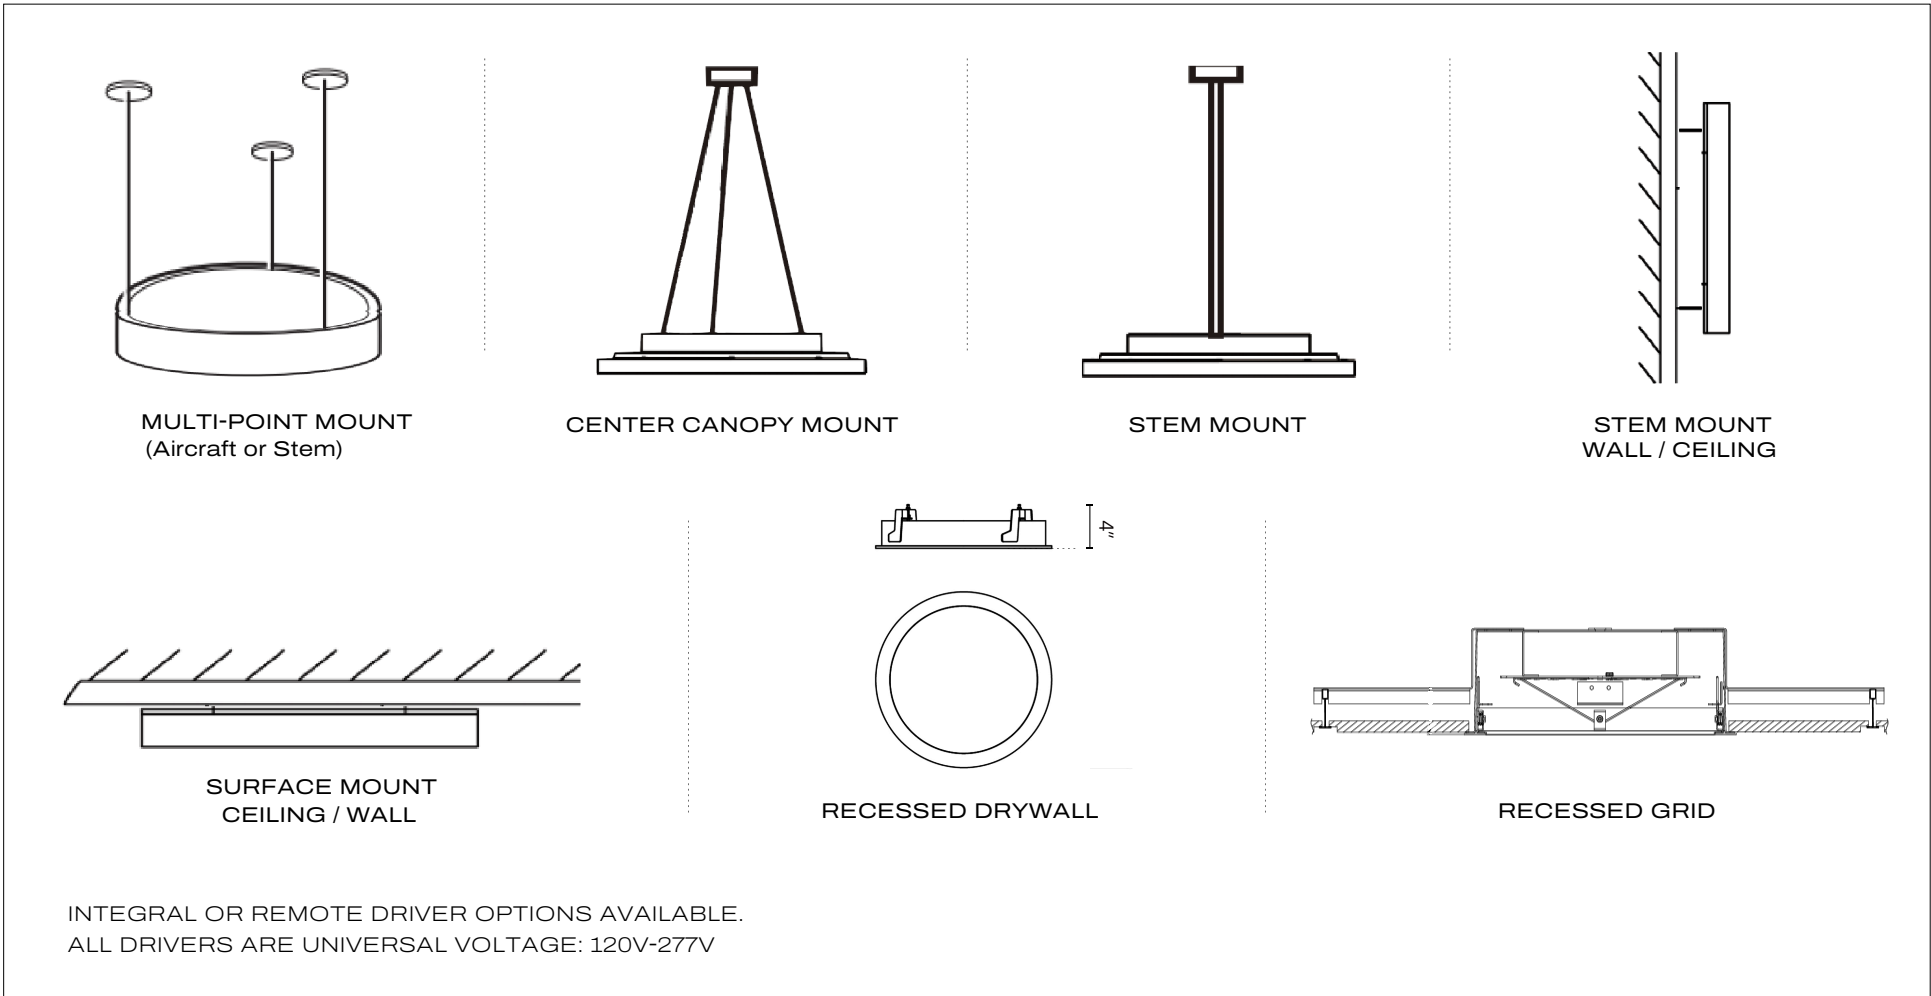


Project:	Type:	Qty:
----------	-------	------


RECESSED

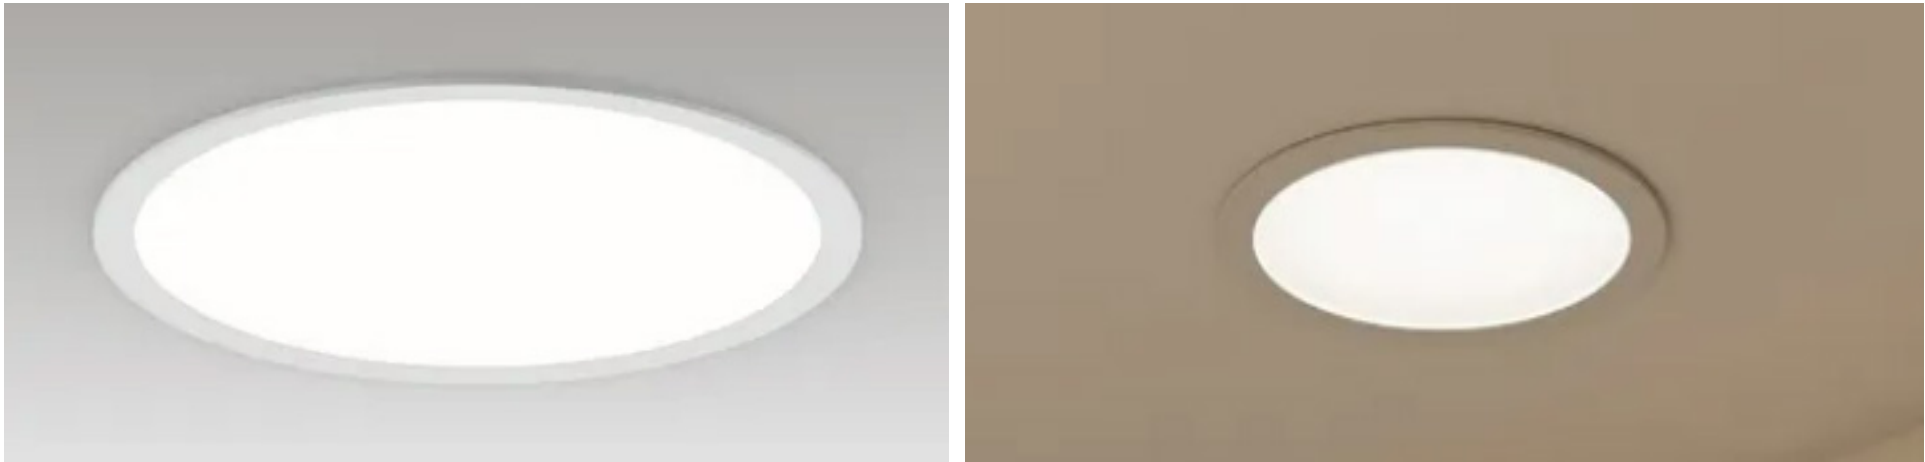

Grid bar mounting A

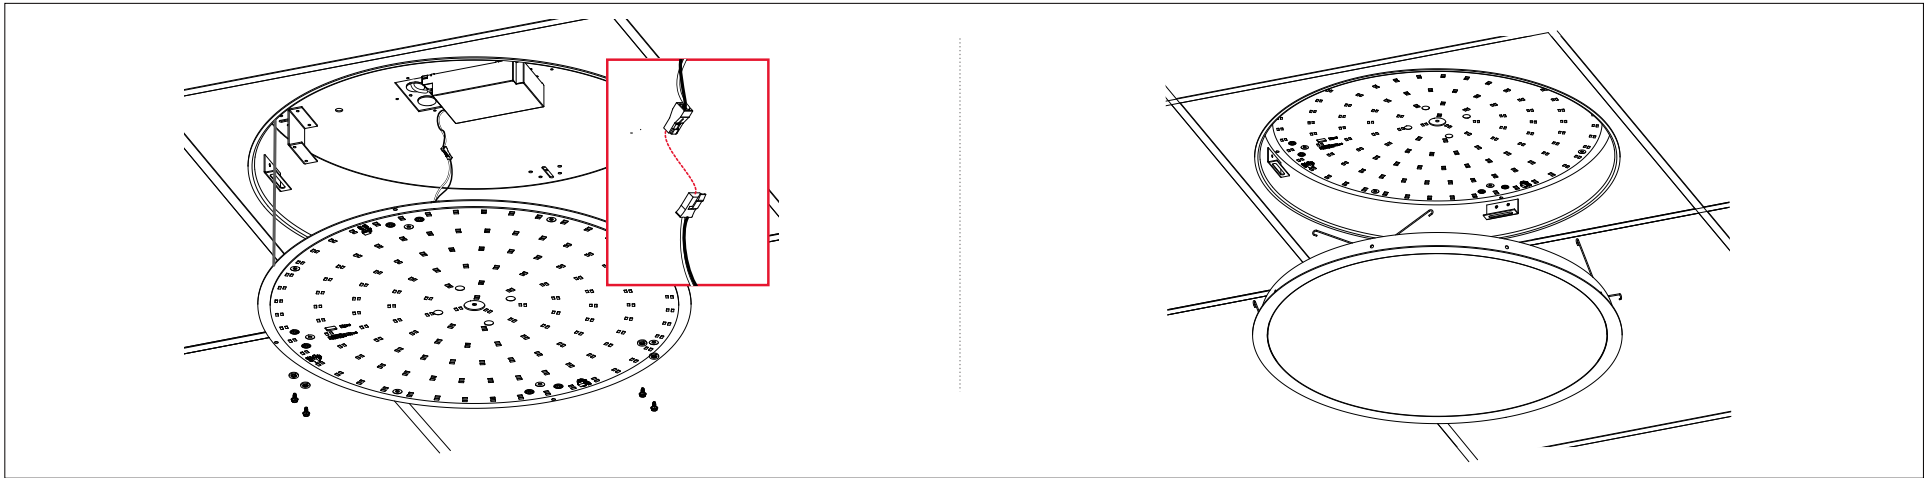

Grid bar mounting B

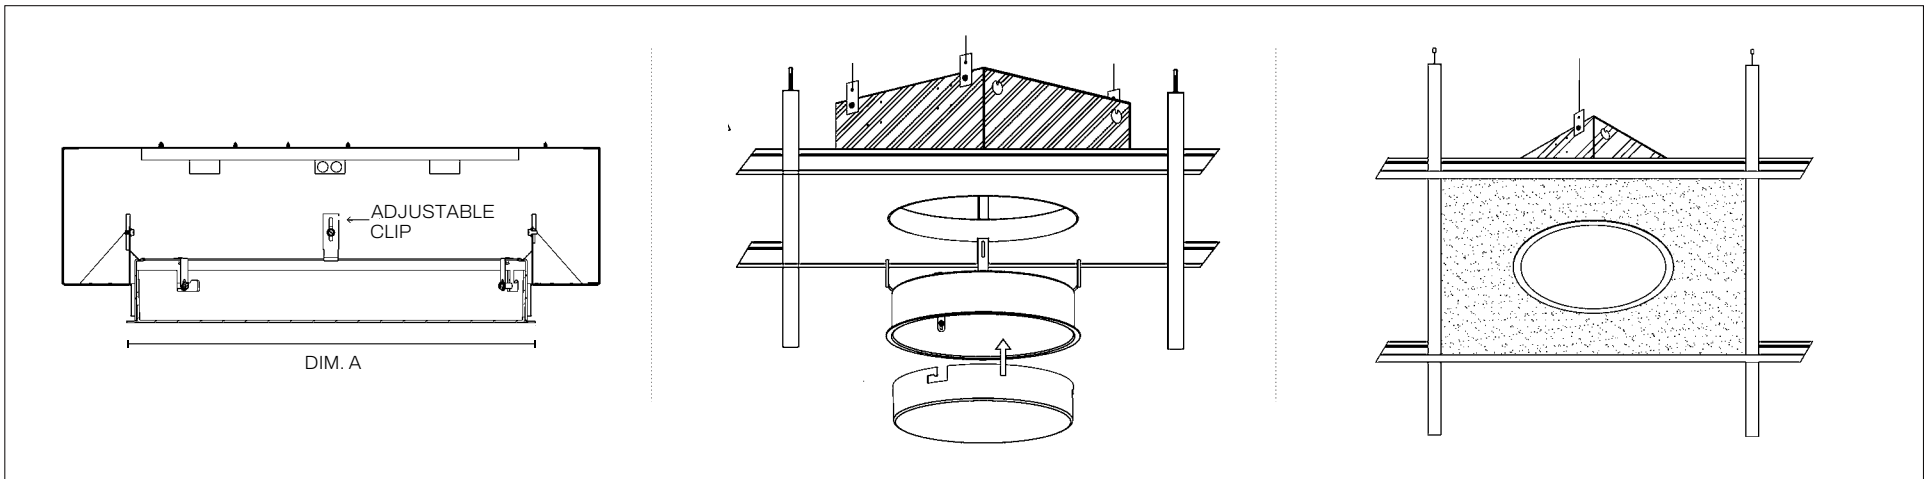

Recessed drywall mounting

